



# EMC TEST REPORT For CE

Test Report No. : KES-E1-16T0680-R1  
Date of Issue : Oct, 31, 2017  
Product name : NETWORK CAMERA  
Model/Type No. : XND-6080VP  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,  
Gyeongsangnam-do, Korea  
Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.  
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial  
Park, TEDA, Tianjin, 300385, People's Republic of China  
Date of Receipt : Nov, 23, 2016  
Test date : Dec, 14, 2016 – Dec, 21, 2016  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

*Tested by*

Dae Hyun, Kim  
EMC Test Engineer

*Reviewed by*

Dong-Hun, Jang  
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-16T0680-R1

Page (2) of (82)

**REPORT REVISION HISTORY**

| Date          | Test Report No.   | Revision History  |
|---------------|-------------------|-------------------|
| Dec. 27, 2016 | KES-E1-16T0680    | Issued            |
| Oct. 31, 2017 | KES-E1-16T0680-R1 | Standard Revision |
|               |                   |                   |
|               |                   |                   |
|               |                   |                   |
|               |                   |                   |
|               |                   |                   |
|               |                   |                   |
|               |                   |                   |
|               |                   |                   |

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## TABLE OF CONTENTS

|            |                                                                       |    |
|------------|-----------------------------------------------------------------------|----|
| 1.0        | General Product Description .....                                     | 4  |
| 1.1        | Test Voltage & Frequency .....                                        | 7  |
| 1.2        | Variant Model Differences.....                                        | 7  |
| 1.3        | Device Modifications .....                                            | 7  |
| 1.4        | Equipment Under Test.....                                             | 7  |
| 1.5        | Support Equipments .....                                              | 7  |
| 1.6        | External I/O Cabling .....                                            | 8  |
| 1.7        | E.U.T Operating Mode(s) .....                                         | 9  |
| 1.8        | Configuration.....                                                    | 10 |
| 1.9        | Calibration Details of Equipment Used for Measurement .....           | 11 |
| 1.10       | Test Facility .....                                                   | 11 |
| 1.11       | Laboratory Accreditations and Listings .....                          | 11 |
| 2.0        | Test Regulations.....                                                 | 12 |
| 2.1        | Conducted Emissions at Mains Power Ports .....                        | 14 |
| 2.2        | Conducted Emissions at Telecommunication Ports .....                  | 15 |
| 2.3        | Radiated Electric Field Emissions(Below 1 GHz) .....                  | 16 |
| 2.4        | Radiated Electric Field Emissions(Above 1 GHz) .....                  | 17 |
| 2.5        | Harmonic Current Emissions.....                                       | 18 |
| 2.6        | Voltage Fluctuations and Flicker .....                                | 19 |
| 3.0        | Criteria for compliance.....                                          | 20 |
| 3.1        | Electrostatic Discharge.....                                          | 22 |
| 3.2        | Radiated Electric Field Immunity .....                                | 26 |
| 3.3        | Electrical Fast Transients/Bursts .....                               | 29 |
| 3.4        | Surge Transients .....                                                | 32 |
| 3.5        | Conducted Disturbance .....                                           | 36 |
| 3.6        | Voltage Dips and Short Interruptions .....                            | 40 |
| APPENDIX A | – TEST DATA.....                                                      | 42 |
|            | Conducted Emissions at Mains Power Ports.....                         | 42 |
|            | Conducted Emissions at Telecommunication Ports .....                  | 44 |
|            | Radiated Electric Field Emissions(Below 1 GHz) .....                  | 48 |
|            | Radiated Electric Field Emissions(Above 1 GHz).....                   | 49 |
|            | Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... | 57 |
|            | Test Setup Photos and Configuration .....                             | 60 |
|            | Conducted Voltage Emissions .....                                     | 60 |
|            | Conducted Telecommunication Emissions .....                           | 61 |
|            | Radiated Electric Field Emissions(Below 1 GHz) .....                  | 63 |
|            | Radiated Electric Field Emissions(Above 1 GHz).....                   | 65 |
|            | Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... | 67 |
|            | Electrostatic Discharge .....                                         | 68 |
|            | Radiated Electric Field Immunity .....                                | 69 |
|            | Electrical Fast Transients/Bursts .....                               | 70 |
|            | Surge Transients .....                                                | 72 |
|            | Conducted Disturbance .....                                           | 74 |
|            | Voltage Dips and Short Interruptions.....                             | 76 |
|            | EUT External Photographs .....                                        | 77 |
|            | EUT Internal Photographs .....                                        | 78 |



## 1.0 General Product Description

### Main Specifications of E.U.T are:

|                             |                                                                                                                                                                                                                                                                     |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Video</b>                |                                                                                                                                                                                                                                                                     |
| Imaging Device              | 1/2.8" 2M CMOS                                                                                                                                                                                                                                                      |
| Total Pixels                | 1945(H) x 1109(V) 2.16M                                                                                                                                                                                                                                             |
| Effective Pixels            | 1945(H) x 1097(V) 2.13M                                                                                                                                                                                                                                             |
| Scanning System             | Progressive Scan                                                                                                                                                                                                                                                    |
| Min. Illumination           | Color : 0.03 lux(F1.4, 1/30sec)<br>B/W : 0.003 Lux (F1.4, 1/30sec)                                                                                                                                                                                                  |
| S / N Ratio                 | 50dB                                                                                                                                                                                                                                                                |
| Video Out                   | CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation<br>USB : Micro USB type B, 1920 x 1080 for installation                                                                                                                                   |
| <b>Lens</b>                 |                                                                                                                                                                                                                                                                     |
| Focal Length (Zoom Ratio)   | 2.8~12mm(4.3x) motorized varifocal                                                                                                                                                                                                                                  |
| Max. Aperture Ratio         | 1.4(Wide) ~ 3.6(Tele)                                                                                                                                                                                                                                               |
| Angular Field of View       | H: 119.5°, V: 62.8°, D: 142.1°<br>H: 27.9°, V: 15.7°, D: 32.0°                                                                                                                                                                                                      |
| Min. Object Distance        | 0.5m (1.64ft)                                                                                                                                                                                                                                                       |
| Focus Control               | Simple focus(Motorized V/F) / Manual, Remote control via network<br>(Manual, Simple focus)                                                                                                                                                                          |
| Lens Type                   | DC Auto Iris, P-iris                                                                                                                                                                                                                                                |
| Mount Type                  | Board-in type                                                                                                                                                                                                                                                       |
| <b>Pan / Tilt / Rotate</b>  |                                                                                                                                                                                                                                                                     |
| Pan / Tilt / Rotate range   | 0° ~ 354° / 0° ~ 85°(TBD) / 0° ~ 355°                                                                                                                                                                                                                               |
| <b>Operational</b>          |                                                                                                                                                                                                                                                                     |
| IR LED                      | -                                                                                                                                                                                                                                                                   |
| Viewable Length             | -                                                                                                                                                                                                                                                                   |
| Camera Title                | Off / On (Displayed up to 85 characters)<br>- W/W : English/Numeric/Special Characters<br>- China : English/Numeric/Special/Chinese Characters<br>- Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White),<br>Transparency, Auto Scale by Resolution |
| Day & Night                 | Auto (ICR) / Color / B/W / External / Schedule                                                                                                                                                                                                                      |
| Backlight Compensation      | Off / BLC / HLC(Masking/Dimming), WDR                                                                                                                                                                                                                               |
| Wide Dynamic Range          | 150dB                                                                                                                                                                                                                                                               |
| Contrast Enhancement        | SSDR (Off / On)                                                                                                                                                                                                                                                     |
| Digital Noise Reduction     | SSNR5 (2D+3D Noise Filter) (Off / On)                                                                                                                                                                                                                               |
| Digital Image Stabilization | Off / On                                                                                                                                                                                                                                                            |
| Defog                       | Auto(input from fog detection) / Manual / Off                                                                                                                                                                                                                       |
| Motion Detection            | Off/ On(8ea, 8point Polygonal zones), Hand over                                                                                                                                                                                                                     |
| Privacy Masking             | Off / On (32ea, polygonal zones)<br>- Color : Grey/Green/Red/Blue/Black/White<br>- Mosaic                                                                                                                                                                           |
| Gain Control                | Off / Low / Middle / High                                                                                                                                                                                                                                           |
| White Balance               | ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)                                                                                                                                                                                                   |
| Contrast                    | level adjustment                                                                                                                                                                                                                                                    |
| LDC                         | On/Off (5 levels with Min/Max)                                                                                                                                                                                                                                      |
| Electronic Shutter Speed    | Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)                                                                                                                                                                                                                  |
| Digital PTZ                 | 24X, 'Digital PTZ(Preset, Group)                                                                                                                                                                                                                                    |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-16T0680-R1

Page (5) of (82)

|                          |                                                                                                                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flip / Mirror            | Flip : On/Off<br>Mirror : On/Off<br>Hallway view : 90°/270°                                                                                                                                                 |
| Video & Audio Analytics  | Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification |
| Alarm I/O                | Input 1ea / Output 1ea                                                                                                                                                                                      |
| Remote Control Interface | -                                                                                                                                                                                                           |
| RS-485 Protocol          | -                                                                                                                                                                                                           |
| Alarm Triggers           | Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect                                                                                                                                  |
| Alarm events             | File upload via FTP, E-Mail<br>Notification via E-Mail<br>local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers<br>External output<br>DPTZ preset                                                  |
| Audio In                 | Selectable (Mic IN/Line IN), Built-in MIC. Max output level : 1Vrms<br>Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm                                                                         |
| Audio out                | Line out, Max output level: 1 Vrms                                                                                                                                                                          |
| Fan / Heater             | N/A                                                                                                                                                                                                         |
| Pixel Counter            | Support                                                                                                                                                                                                     |
| <b>Network</b>           |                                                                                                                                                                                                             |
| Ethernet                 | RJ-45 (10/100/1000BASE-T)                                                                                                                                                                                   |
| Video Compression Format | H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG                                                                                                                                         |
| Resolution               | 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576, 640x480, 640x360, 320x240, 320x180                                                                                           |
| Max. Framerate           | H.265/H.264 : Max. 60fps at all resolutions<br>Motion JPEG : Max. 30fps                                                                                                                                     |
| Smart Codec              | Manual Mode (area-based : 5EA)                                                                                                                                                                              |
| WiseStream               | Support                                                                                                                                                                                                     |
| Video Quality Adjustment | H.264/H.265 : Target Bitrate Level Control<br>MJPEG : Target Bitrate Level Control                                                                                                                          |
| Bitrate Control Method   | H.264/H.265 : CBR or VBR<br>MJPEG : VBR                                                                                                                                                                     |
| Streaming Capability     | Multiple Streaming (Up to 10 Profiles)                                                                                                                                                                      |
| Audio Compression Format | G.711 u-law /G.726 Selectable<br>G.726 (ADPCM) 8KHz, G.711 8KHz<br>G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps<br>AAC-LC : 48Kbps at 8/16/32/48KHz                                                               |
| Audio Communication      | Bi-directional (2-Way)                                                                                                                                                                                      |
| IP                       | IPv4, IPv6                                                                                                                                                                                                  |
| Protocol                 | TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour                             |
| Security                 | HTTPS(SSL) Login Authentication<br>Digest Login Authentication<br>IP Address Filtering<br>User access Log<br>802.1X Authentication (EAP-TLS, EAP-LEAP)                                                      |
| Streaming Method         | Unicast / Multicast                                                                                                                                                                                         |
| Max. User Access         | 20 users at Unicast Mode                                                                                                                                                                                    |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-16T0680-R1

Page (6) of (82)

|                                  |                                                                                                                                                                                                                                                                                       |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Edge Storage                     | SD/SDHC/SDXC 2slot (up to 512 GB)<br>- Continuous recording(1'st slot to 2'nd slot)<br>- Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded.<br>NAS(Network Attached Storage)<br>Local PC for Instant Recording                                                 |
| Application Programming          | ONVIF Profile S/G<br>SUNAPI(HTTP API)<br>Open Platform                                                                                                                                                                                                                                |
| Webpage Language                 | English, Korean, Chinese, French, Italian, Spanish, German, Japanese,<br>Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian,<br>Dutch, Croatia, Hungary, Greek, Norsk, Finnish                                                                           |
| Web Viewer                       | Supported OS: Windows 7, 8, 10, Mac OS X 10.10, 10.11, 10.12<br>Non-plugin Webviewer<br>Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49, Apple Safari 9 (Mac OS X only)<br>Plug-in Webviewer<br>Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only) |
| Central Management Software      | SmartViewer, SSM                                                                                                                                                                                                                                                                      |
| <b>Environmental</b>             |                                                                                                                                                                                                                                                                                       |
| Operating Temperature / Humidity | -10°C ~ +55°C (-14°F ~ +131°F) / Less than 90% RH                                                                                                                                                                                                                                     |
| Storage Temperature / Humidity   | -50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH                                                                                                                                                                                                                                     |
| Ingress Protection               |                                                                                                                                                                                                                                                                                       |
| Vandal Resistance                | IK08                                                                                                                                                                                                                                                                                  |
| <b>Electrical</b>                |                                                                                                                                                                                                                                                                                       |
| Input Voltage / Current          | 12VDC ± 10%, PoE(IEEE802.3af)                                                                                                                                                                                                                                                         |
| Power Consumption                | TBD                                                                                                                                                                                                                                                                                   |
| <b>Mechanical</b>                |                                                                                                                                                                                                                                                                                       |
| Color / Material                 | IVORY / Aluminum                                                                                                                                                                                                                                                                      |
| Dimension (WxHxD)                | PND-9080R                                                                                                                                                                                                                                                                             |
| Weight                           |                                                                                                                                                                                                                                                                                       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE  
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description    | Model Number | Serial Number | Manufacturer                       | Remarks |
|----------------|--------------|---------------|------------------------------------|---------|
| NETWORK CAMERA | XND-6080VP   | -             | Hanwha Techwin (Tianjin) Co., Ltd. | E.U.T   |

## 1.5 Support Equipments

| Description      | Model Number   | Serial Number | Manufacturer                               | Remarks |
|------------------|----------------|---------------|--------------------------------------------|---------|
| PoE Adapter      | ANY4805C-LT1   | 10H300002     | ANY ELECTRONICS CO., LTD                   | -       |
| Speaker          | BR10000A CUVE  | -             | BEIJING EDIFIER HI-TECH GROUP.             | -       |
| Mobile Phone     | A1688          | -             | Apple Inc.                                 | -       |
| Micro SD Card    | -              | -             | -                                          | -       |
| Notebook         | ProBook4430s   | -             | HP                                         | -       |
| Notebook Adapter | SeriesPPP0009H | -             | CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD, | -       |
| Alarm Jig        | -              | -             | -                                          | -       |



## 1.6 External I/O Cabling

- DC 12 V Mode

| Start                  |                    | END           |                    | Cable Spec. |        |
|------------------------|--------------------|---------------|--------------------|-------------|--------|
| Description            | I/O Port           | Description   | I/O Port           | Length      | Shield |
| NETWORK CAMERA (E.U.T) | RJ-45(LAN)         | Notebook      | RJ-45(LAN)         | 4.0         | U      |
|                        | Audio in           | Mobile Phone  | Audio Out          | 1.2         | U      |
|                        | Audio Out          | Speaker       | Audio in           | 1.1         | U      |
|                        | Alarm              | Alarm Jig     | Alarm              | 3.2         | U      |
|                        | Micro SD Card Slot | Micro SD Card | Micro SD Card Slot | -           | -      |

- PoE Mode

| Start                  |                    | END           |                    | Cable Spec. |        |
|------------------------|--------------------|---------------|--------------------|-------------|--------|
| Description            | I/O Port           | Description   | I/O Port           | Length      | Shield |
| NETWORK CAMERA (E.U.T) | Audio in           | Mobile Phone  | Audio Out          | 1.2         | U      |
|                        | Audio Out          | Speaker       | Audio in           | 1.1         | U      |
|                        | Alarm              | Alarm Jig     | Alarm              | 3.2         | U      |
|                        | Micro SD Card Slot | Micro SD Card | Micro SD Card Slot | -           | -      |
|                        | RJ-45(PoE)         | PoE Adapter   | RJ-45(PoE)         | 4.0         | U      |
| PoE Adapter            | RJ-45(LAN)         | Notebook      | RJ-45(LAN)         | 1.9         | U      |

\* Unshielded=U, Shielded=S



## 1.7 E.U.T Operating Mode(s)

| Test mode | Normal operating             |
|-----------|------------------------------|
| OP        | E.U.T Monitoring , Ping test |
| PoE       |                              |


| E.U.T Test operating S/W |         |                          |
|--------------------------|---------|--------------------------|
| Name                     | Version | Manufacture Company      |
| WebViewer                | -       | Hanwha Techwin Co., Ltd. |

- Input power condition during the measurements was 12 v (dc) , PoE


## 1.8 Configuration

■ AC Main  
□ DC 12 V Main

- DC 12 V Mode

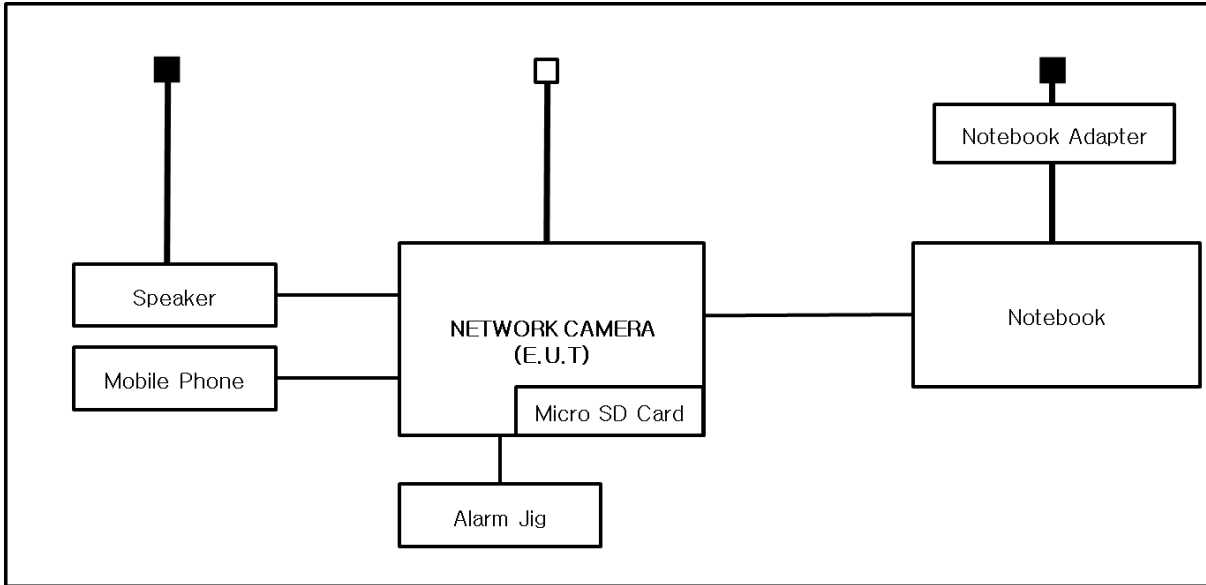

- PoE Mode

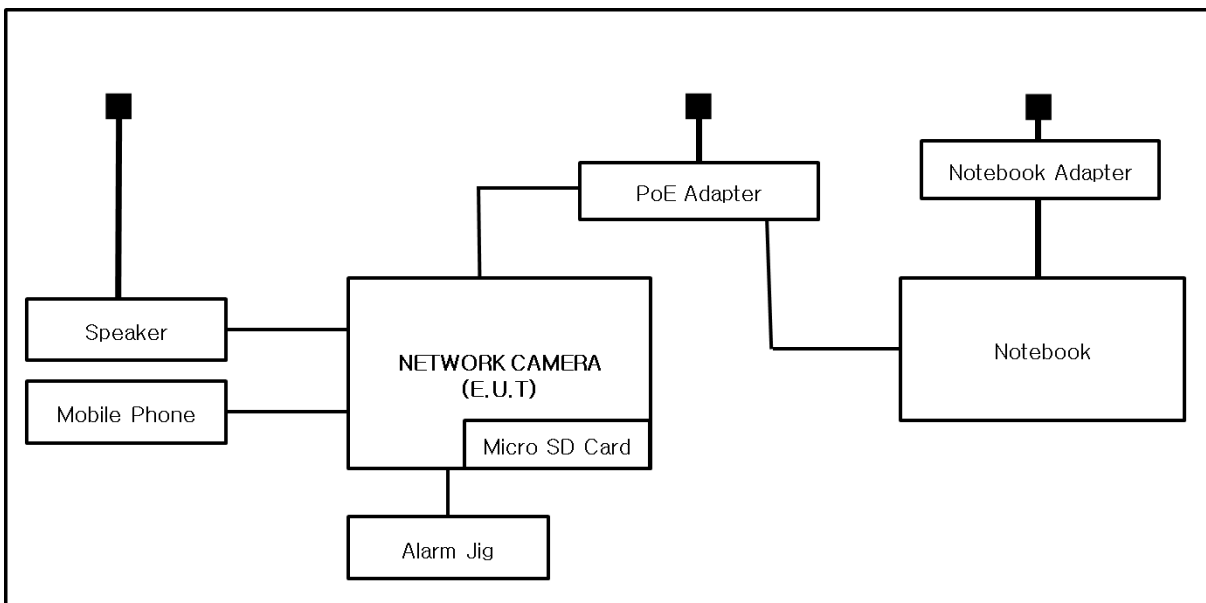

## 1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

## 1.11 Laboratory Accreditations and Listings

| Country       | Agency | Scope of Accreditation                                                                                                                                                                                 | Logo                                                                                                                     |
|---------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| USA           | FCC    | 3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.                                                                                                       |                                       |
| JAPAN         | VCCI   | Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz         | <br>R-4308, C-4798,<br>T-2311, G-914 |
| KOREA         | MSIP   | EMI (10 meter Open Area Test Site and two conducted sites)<br>Radio(3 & 10 meter Open Area Test Sites and one conducted site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KR0100                          |
| Canada        | IC     | 3 & 10 meter Open Area Test Sites and one conducted site                                                                                                                                               | <br>4769B-1                         |
| Europe        | CE     | EMI (10 meter Open Area Test Site and two conducted sites)<br>Radio(3 & 10 meter Open Area Test Sites and one conducted site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) |                                     |
| International | KOLAS  | EMI (10 meter Open Area Test Site and two conducted sites)<br>Radio(3 & 10 meter Open Area Test Sites and one conducted site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) |                                     |



## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



- 
- |                                                               |                                  |                                  |
|---------------------------------------------------------------|----------------------------------|----------------------------------|
| <input type="checkbox"/> <b>VCCI V-3 / 2015.04</b>            | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>AS/NZS CISPR22:2009 +A1:2010</b>  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>47 CFR Part 15, Subpart B</b>     |                                  |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009                      |                                  |                                  |
| <input type="checkbox"/> <b>IC Regulation ICES-003 : 2016</b> |                                  |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10                  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014                      |                                  |                                  |
| <br><input type="checkbox"/> <b>RE- Directive 2014/53/EU</b>  |                                  |                                  |
| <br><input type="checkbox"/> EN 301 489-1 V1.9.2              |                                  |                                  |
| <input type="checkbox"/> Equipment for fixed use              |                                  |                                  |
| <input type="checkbox"/> Equipment for vehicular use          |                                  |                                  |
| <input type="checkbox"/> Equipment for portable use           |                                  |                                  |
| <br><input type="checkbox"/> EN 301 489-3 V1.6.1              |                                  |                                  |
| <br><input type="checkbox"/> EN 301 489-17 V2.2.1             |                                  |                                  |
| <br><input type="checkbox"/> EN 60945:2002                    |                                  |                                  |



## 2.1 Conducted Emissions at Mains Power Ports

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test Receiver       | ESR3         | R & S        | 101783        | 05, 03, 2017 |
| <input type="checkbox"/> | LISN                    | ENV216       | R & S        | 101137        | 02, 04, 2017 |
| <input type="checkbox"/> | LISN                    | ENV216       | R & S        | 101786        | 05, 02, 2017 |
| <input type="checkbox"/> | Electro wave Shieldroom | -            | SEMITEC      | -             | -            |
| <input type="checkbox"/> | EMI Test S/W            | EMC32        | R&S          | 9.12.00       | -            |

### Test Conditions

Temperature: °C

Relative Humidity: %

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☐ PASS  
☐ NOT PASS  
☒ NOT APPLICABLE

### Remarks

DC 12 V , PoE Mode N/A :

E.U.T power is 12 v (dc) power and PoE, limits are not specified

## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Dec, 18, 2016

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                                | Description             | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|-------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test Receiver       | ESR3         | R&S              | 101783        | 05, 03, 2017 |
| <input checked="" type="checkbox"/> | LISN                    | ENV216       | R&S              | 101137        | 02, 04, 2017 |
| <input checked="" type="checkbox"/> | LISN                    | ENV216       | R&S              | 101786        | 05, 02, 2017 |
| <input checked="" type="checkbox"/> | 8-Wire ISN CAT3         | CAT3 8158    | Schwarzbeck Mess | 8158-0019     | 04, 01, 2017 |
| <input checked="" type="checkbox"/> | 8-Wire ISN CAT5         | CAT5 8158    | Schwarzbeck Mess | 8158-0030     | 04, 01, 2017 |
| <input type="checkbox"/>            | 8-Wire ISN CAT6         | NTFM 8158    | Schwarzbeck Mess | 8158-0029     | 08, 11, 2017 |
| <input checked="" type="checkbox"/> | Electro wave Shieldroom | -            | SEMITEC          | -             | -            |
| <input checked="" type="checkbox"/> | EMI Test S/W            | EMC32        | R&S              | 9.12.00       | -            |

### Test Conditions

Temperature: 19,6 °C

Relative Humidity: 39,3 %

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

### Test Date

Dec, 19, 2016

### Test Location

☐ Open Area Test Site #1

☒ Open Area Test Site #2

### Test Equipment

| Used                                | Description          | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|----------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI TEST Receiver    | ESR3         | R&S          | 101781        | 05, 03, 2017 |
| <input checked="" type="checkbox"/> | Trilog-Broadband ANT | VULB 9163    | Schwarzbeck  | 9163-713      | 05, 15, 2017 |
| <input checked="" type="checkbox"/> | Open Area Test Site  | -            | KES          | -             | -            |
| <input checked="" type="checkbox"/> | Antenna Mast         | -            | DAEIL EMC    | -             | -            |
| <input checked="" type="checkbox"/> | Turn Table           | -            | DAEIL EMC    | -             | -            |
| <input checked="" type="checkbox"/> | EMI Test S/W         | -            | -            | -             | -            |

### Test Conditions

Temperature: 3,6 °C

Relative Humidity: 61,0 %

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

### Test Date

Dec, 21, 2016

### Test Location

Semi Anechoic Chamber #2

### Test Equipment

| Used                                | Description                    | Model Number | Manufacturer                  | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------------|--------------|-------------------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA     | SAS-571      | A.H.SYSTEM,INC                | 781           | 05, 07, 2017 |
| <input checked="" type="checkbox"/> | EMI Test Receiver              | ESU26        | R&S                           | 100552        | 04, 24, 2017 |
| <input checked="" type="checkbox"/> | Broadband Coaxial Preamplifier | BBV 9718     | Schwarzbeck Mess - Elektronik | 9718-246      | 10, 14, 2017 |
| <input checked="" type="checkbox"/> | Semi Anechoic Chamber #2       | -            | SEMITEC                       | -             | -            |
| <input checked="" type="checkbox"/> | Antenna Mast                   | -            | AUDIX                         | -             | -            |
| <input checked="" type="checkbox"/> | Turn Table                     | -            | AUDIX                         | -             | -            |
| <input checked="" type="checkbox"/> | EMI Test S/W                   | e3           | AUDIX                         | 8.083b        | -            |

### Test Conditions

Temperature: 19,9 °C

Relative Humidity: 39,7 %

### Frequency Range of Measurement

1 GHz to 6 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.5 Harmonic Current Emissions

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description            | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | AC Source              | ACS 500 N    | EM TEST      | V1024106760   | 08, 08, 2017 |
| <input type="checkbox"/> | Digital Power Analyzer | DPA 500 N    | EM TEST      | V1024106759   | 08, 08, 2017 |
| <input type="checkbox"/> | EMI Test S/W           | dpa.control  | EM TEST AG   | 5.4.8.0       | -            |

### Test Conditions

Temperature: °C

Relative Humidity: %

### Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

### Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

### Remarks

N/A



## 2.6 Voltage Fluctuations and Flicker

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description            | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | AC Source              | ACS 500 N    | EM test      | V1024106760   | 08, 08, 2017 |
| <input type="checkbox"/> | Digital Power Analyzer | DPA 500 N    | EM test      | V1024106759   | 08, 08, 2017 |
| <input type="checkbox"/> | EMI Test S/W           | dpa.control  | EM TEST AG   | 5.4.8.0       | -            |

### Test Conditions

Temperature: °C

Relative Humidity: %

### Test Results

The requirements are:

- ☐ PASS  
☐ NOT PASS  
☒ NOT APPLICABLE

### Remarks

N/A

### 3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:  
EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

#### Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

#### Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

### **Fast transient burst / slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

### **Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,  
and no such flickering of indicators oeuvres at  $U = 130 \text{ dB}\mu\text{V}$ .

For component of CCTV systems, where the status is monitored by observing the TV picture,  
then deterioration of the picture is allowed at  $U = 140 \text{ dB}\mu\text{V}$ , providing:

- (a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at  $U = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at  $U = 120 \text{ dB}\mu\text{V}$ .

### **Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

## 3.1 Electrostatic Discharge

### Reference Standard

EN 61000-4-2:2009

### Test Date

Dec, 17, 2016

### Test Location

EMS-ESD: Electro wave Shieldroom

### Test Equipment

| Used                                | Description   | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | ESD SIMULATOR | ESS-2000     | Noise Ken    | ESS05X4620    | 02, 24, 2017 |
| <input checked="" type="checkbox"/> | HCP           | -            | Noise Ken    | -             | -            |
| <input checked="" type="checkbox"/> | VCP           | -            | Noise Ken    | -             | -            |
| <input checked="" type="checkbox"/> | EMS Test S/W  | N/A          | N/A          | N/A           | -            |

### Test Conditions

Temperature: 18,8 °C  
Relative Humidity: 39,4 %  
Atmospheric Pressure: 101,6 kPa

### Test Specifications

Discharge Factor:  $\geq 1$  s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge  
10 at all locations for Contact discharge

|                    |                                                                                                                                                                                                 |                                                                                                                                                                                                                   |                                                                                                                                                                                             |                                                                                                                                                                                             |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Discharge Voltage: | <b>Contact</b><br><input type="checkbox"/> 2 kV<br><input type="checkbox"/> 4 kV<br><input checked="" type="checkbox"/> 6 kV<br><input type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV | <b>Air</b><br><input checked="" type="checkbox"/> 2 kV<br><input checked="" type="checkbox"/> 4 kV<br><input type="checkbox"/> 6 kV<br><input checked="" type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV | <b>HCP</b><br><input type="checkbox"/> 2 kV<br><input type="checkbox"/> 4 kV<br><input checked="" type="checkbox"/> 6 kV<br><input type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV | <b>VCP</b><br><input type="checkbox"/> 2 kV<br><input type="checkbox"/> 4 kV<br><input checked="" type="checkbox"/> 6 kV<br><input type="checkbox"/> 8 kV<br><input type="checkbox"/> 15 kV |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Notes: HCP: Horizontal coupling plane  
VCP: Vertical coupling plane


Required Performance Criteria: ☒ Complied

**Location of Discharge:**

|         |                                                                                     |
|---------|-------------------------------------------------------------------------------------|
| Air     |  |
| Contact |  |



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

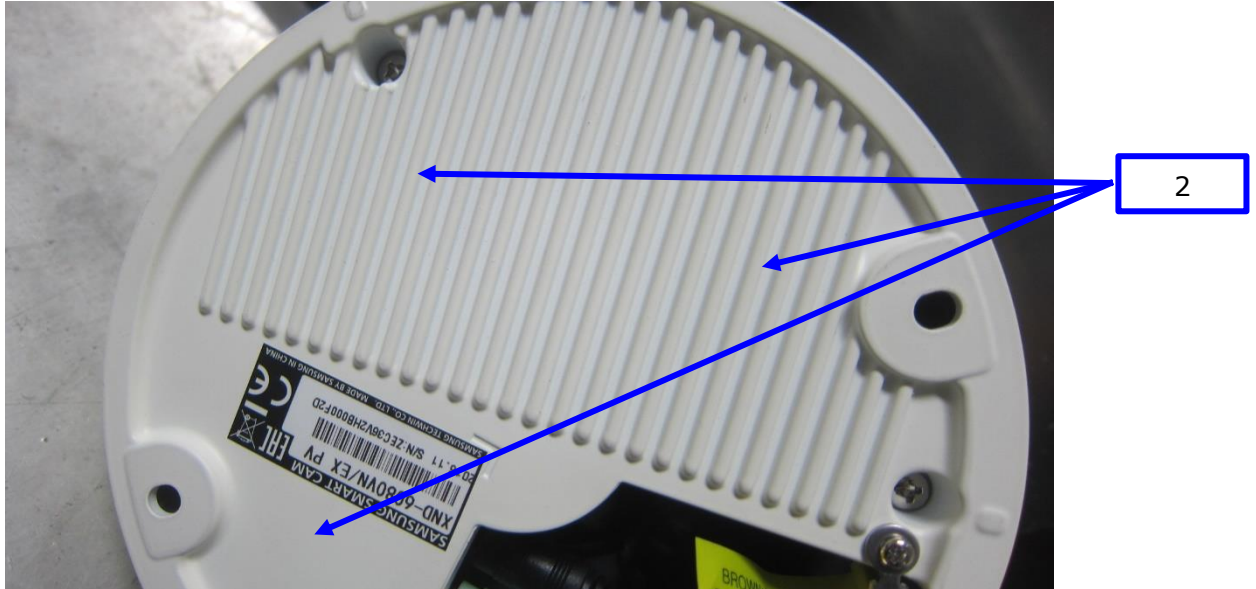



## Test Data

### - DC 12 V Mode

#### Indirect Discharge

| No. | Test Point  | Discharge Method  | Observations | Remarks |
|-----|-------------|-------------------|--------------|---------|
| 1   | HCP Contact | Contact Discharge | Complied     | -       |
| 2   | VCP Contact | Contact Discharge | Complied     | -       |

#### Direct Discharge

| No. | Test Point    | Discharge Method  | Observations | Remarks |
|-----|---------------|-------------------|--------------|---------|
| 1   | EUT Screw     | Contact Discharge | Complied     | -       |
| 2   | EUT Enclosure | Contact Discharge | Complied     | -       |

### - PoE Mode

#### Indirect Discharge

| No. | Test Point  | Discharge Method  | Observations | Remarks |
|-----|-------------|-------------------|--------------|---------|
| 1   | HCP Contact | Contact Discharge | Complied     | -       |
| 2   | VCP Contact | Contact Discharge | Complied     | -       |

#### Direct Discharge

| No. | Test Point    | Discharge Method  | Observations | Remarks |
|-----|---------------|-------------------|--------------|---------|
| 1   | EUT Screw     | Contact Discharge | Complied     | -       |
| 2   | EUT Enclosure | Contact Discharge | Complied     | -       |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

## Test Results

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

## Remarks

- N/A



## 3.2 Radiated Electric Field Immunity

### Reference Standard

EN 61000-4-3:2006 +A2:2010

### Test Date

Dec, 20, 2016

### Test Location

EMS-RS: ☐ Semi Anechoic Chamber #1☒ Semi Anechoic Chamber #2

### Test Equipment

| Used                                | Description                    | Model Number        | Manufacturer                        | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------------|---------------------|-------------------------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | Signal Generator               | ESG-3000A           | HP                                  | US37040210    | 11, 01, 2017 |
| <input checked="" type="checkbox"/> | Amplifier                      | ITA0300-200         | Infinitech                          | -             | 11, 01, 2017 |
| <input checked="" type="checkbox"/> | Amplifier                      | ITA0750-200         | Infinitech                          | -             | 11, 01, 2017 |
| <input checked="" type="checkbox"/> | Amplifier                      | ITA1500-100         | Infinitech                          | -             | 11, 01, 2017 |
| <input checked="" type="checkbox"/> | Amplifier                      | ITA2500-100         | Infinitech                          | -             | 11, 01, 2017 |
| <input checked="" type="checkbox"/> | GPIO INTERFACE CONTROL         | SYSTEM CONTROL UNIT | Infinitech                          | -             | -            |
| <input checked="" type="checkbox"/> | POWER SUPPLY                   | SYSTEM POWER SUPPLY | Infinitech                          | -             | -            |
| <input checked="" type="checkbox"/> | Power Meter                    | E4419B              | Agilent                             | MY45101506    | 06, 27, 2017 |
| <input checked="" type="checkbox"/> | Average Power Sensor           | E9301A              | Agilent                             | -             | 06, 27, 2017 |
| <input checked="" type="checkbox"/> | Average Power Sensor           | E9301A              | Agilent                             | MY41495698    | 11, 17, 2017 |
| <input checked="" type="checkbox"/> | Stacked Double Log-Per-Antenna | STPL9128 D          | SCHWARZBECK                         | 9128D038      | -            |
| <input checked="" type="checkbox"/> | Semi Anechoic Chamber #2       | -                   | SEMITEC                             | -             | -            |
| <input checked="" type="checkbox"/> | EMS Test S/W                   | KTI_RS2012          | KOREA TECHNOLOGY INSTITUTE CO., LTD | 2.1.1         | -            |



## Test Conditions

Temperature: 18,0 °C  
Relative Humidity: 41,9 %  
Atmospheric Pressure: 101,1 kPa

## Test Specifications

Antenna Polarization: Horizontal & Vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m  
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz  
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

# of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-16T0680-R1

Page (28) of (82)

**Test Data**

- DC 12 V Mode

| Side Exposed | Observations |          |
|--------------|--------------|----------|
|              | Horizontal   | Vertical |
| Front        | Complied     | Complied |
| Right        | Complied     | Complied |
| Back         | Complied     | Complied |
| Left         | Complied     | Complied |

- PoE Mode

| Side Exposed | Observations |          |
|--------------|--------------|----------|
|              | Horizontal   | Vertical |
| Front        | Complied     | Complied |
| Right        | Complied     | Complied |
| Back         | Complied     | Complied |
| Left         | Complied     | Complied |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

- N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.3 Electrical Fast Transients/Bursts

#### Reference Standard

EN 61000-4-4:2012

#### Test Date

Dec, 15, 2016

#### Test Location

EMS-EFT: Electro wave Shieldroom

#### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | Ultra Compact Simulator   | UCS 500 N5   | EM TEST      | V0936105120   | 06, 27, 2017 |
| <input checked="" type="checkbox"/> | Capacitive Coupling Clamp | HFK          | EM TEST      | 070925        | 06, 27, 2017 |
| <input checked="" type="checkbox"/> | Motor Variac              | MV2616       | EM TEST      | V0936105123   | 06, 27, 2017 |
| <input checked="" type="checkbox"/> | EMS Test S/W              | iec.control  | EM TEST AG   | 5.0.9.0       | -            |

#### Test Conditions

Temperature: 18,1 °C  
Relative Humidity: 38,1 %  
Atmospheric Pressure: 100,5 kPa

#### Test Specifications

|                                                              |                                                                        |                                              |
|--------------------------------------------------------------|------------------------------------------------------------------------|----------------------------------------------|
| Pulse Amplitude & Polarity:<br>(AC Power Lines)              | <input type="checkbox"/> ± 1.0 kV<br><input type="checkbox"/> ± 4.0 kV | <input type="checkbox"/> ± 2.0 kV            |
| Pulse Amplitude & Polarity:<br>(Other supply / Signal Lines) | <input type="checkbox"/> ± 0.5 kV<br><input type="checkbox"/> ± 2.0 kV | <input checked="" type="checkbox"/> ± 1.0 kV |
| Burst Period:                                                | <input checked="" type="checkbox"/> 300 ms                             | <input type="checkbox"/> 2 s                 |
| Repetition Rate:                                             | <input type="checkbox"/> 5 kHz                                         | <input checked="" type="checkbox"/> 100 kHz  |
| Duration of Test Voltage:                                    | <input checked="" type="checkbox"/> ≥ 1 min                            |                                              |
| Required Performance Criteria:                               | <input checked="" type="checkbox"/> Complied                           |                                              |



## Test Data

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☒ Input d.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| L1 – L2             | Complied       | Complied       |

☒ Signal ports and telecommunication ports – Coupling Clamp used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| RJ-45 (LAN)         | Complied       | Complied       |
| Alarm               | Complied       | Complied       |



- PoE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☐ Input d.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

☒ Signal ports and telecommunication ports – Coupling Clamp used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| RJ-45 (PoE)         | Complied       | Complied       |
| Alarm               | Complied       | Complied       |

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

- N/A



## 3.4 Surge Transients

### Reference Standard

EN 61000-4-5:2014

### Test Date

Dec, 15, 2016

### Test Location

EMS-Surge: Electro wave Shieldroom

### Test Equipment

| Used                                | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | Ultra Compact Simulator | UCS 500 N5   | EM TEST      | V0936105120   | 06, 27, 2017 |
| <input checked="" type="checkbox"/> | Motor Variac            | MV2616       | EM TEST      | V0936105123   | 06, 27, 2017 |
| <input type="checkbox"/>            | CDN                     | CNV 504N     | EM TEST      | V0936105121   | 06, 27, 2017 |
| <input type="checkbox"/>            | CDN                     | CNV 508T5    | EM TEST      | P1549168422   | 04, 27, 2017 |
| <input checked="" type="checkbox"/> | CDN                     | CNV 508N1    | EM TEST      | P1551168979   | 04, 27, 2017 |
| <input checked="" type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST AG   | 5.0.9.0       | -            |

### Test Conditions

Temperature: 18,1 °C  
Relative Humidity: 38,1 %  
Atmospheric Pressure: 100,5 kPa



## Test Specifications

### AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

### Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min    ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied



## Test Data

- DC 12 V Mode

☐ Line to Line – Differential Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L – N               | -              | -              |
| L – PE              | -              | -              |
| N – PE              | -              | -              |

☒ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L1-PE               | Complied       | Complied       |
| L2-PE               | Complied       | Complied       |

## Signal Lines

☒ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| RJ-45 (LAN)         | Complied       | Complied       |
| Alarm               | Complied       | Complied       |

**- POE Mode**☐ Line to Line – Differential Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L – N               | -              | -              |
| L – PE              | -              | -              |
| N – PE              | -              | -              |

☐ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| L1-PE               | -              | -              |
| L2-PE               | -              | -              |

**Signal Lines**☒ Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| RJ-45 (PoE)         | Complied       | Complied       |
| Alarm               | Complied       | Complied       |

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

N/A

## 3.5 Conducted Disturbance

### Reference Standard

EN 61000-4-6:2014

### Test Date

Dec, 14, 2016

### Test Location

EMS-CS: Electro wave Shieldroom

### Test Equipment

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | Continuous Wave Generator | CWS 500N1    | EM TEST      | V0936105119   | 08, 08, 2017 |
| <input checked="" type="checkbox"/> | 6 dB Attenuator           | ATT6         | EM TEST      | 1208-34       | 08, 08, 2017 |
| <input checked="" type="checkbox"/> | CDN                       | CDN-M2/M3N   | EM TEST      | 0909-06       | 08, 08, 2017 |
| <input type="checkbox"/>            | CDN                       | CDN-T2-RJ11  | EM TEST      | 0909-07       | 08, 08, 2017 |
| <input type="checkbox"/>            | CDN                       | CDN-T4       | EM TEST      | 0909-08       | 08, 08, 2017 |
| <input type="checkbox"/>            | CDN                       | CDN-T8RJ45   | EM TEST      | 0909-09       | 08, 08, 2017 |
| <input type="checkbox"/>            | CDN                       | CDN-AF2      | EM TEST      | 0909-10       | 08, 08, 2017 |
| <input type="checkbox"/>            | CDN                       | CDN-AF4      | EM TEST      | 0909-11       | 08, 08, 2017 |
| <input checked="" type="checkbox"/> | EM Injection Clamp        | EM 101       | Liithi       | 35943         | 02, 04, 2017 |
| <input checked="" type="checkbox"/> | EMS Test S/W              | icd.control  | EM TEST AG   | 5.3.7         | -            |

### Test Conditions

Temperature: 17,6 °C  
Relative Humidity: 36,9 %  
Atmospheric Pressure: 100,8 kPa



## KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-16T0680-R1

Page (37) of (82)

### Test Specifications

Frequency range:

☒ 150 kHz to 100 MHz

☐ 150 kHz to 80 MHz

Voltage Level:

☐ 1 Vrms

☐ 3 Vrms

☒ 10 Vrms

Modulation:

☒ AM, 80 %, 1 kHz sine wave

☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:

☒ 1 % step

Dwell Time:

☐ 1 s

☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## Test Data

- DC 12 V Mode

☐ Input a.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                 | Observations |
|--------------------------------------|-----------------------------------------------------------------|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

☒ Input d.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                            | Observations |
|--------------------------------------|----------------------------------------------------------------------------|--------------|
| L1 - L2                              | CDN ( <input checked="" type="checkbox"/> M2, <input type="checkbox"/> M3) | Complied     |

☒ Signal ports and telecommunication ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| RJ-45 (LAN)                          | Complied        | Complied     |
| Alarm                                | Complied        | Complied     |



- PoE Mode

☐ Input a.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                 | Observations |
|--------------------------------------|-----------------------------------------------------------------|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

☐ Input d.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method                                                 | Observations |
|--------------------------------------|-----------------------------------------------------------------|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

☒ Signal ports and telecommunication ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| RJ-45 (PoE)                          | Complied        | Complied     |
| Alarm                                | Complied        | Complied     |

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

**Remarks**

N/A



### 3.6 Voltage Dips and Short Interruptions

#### Reference Standard

EN 61000-4-11:2004

#### Test Date

N/A

#### Test Location

EMS-Voltage dip: Electro wave Shieldroom

#### Test Equipment

| Used                     | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | Ultra Compact Simulator | UCS 500 N5   | EM TEST      | V0936105120   | 06, 27, 2017 |
| <input type="checkbox"/> | Motor Variac            | MV2616       | EM TEST      | V0936105123   | 06, 27, 2017 |
| <input type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST AG   | 5.0.9.0       | -            |

#### Test Conditions

Temperature: °C  
Relative Humidity: %  
Atmospheric Pressure: kPa



## Test Specifications & Observations/Remarks

(Test Voltage : 50 Hz)

| <u>Test Level</u>                  | <u>Duration [in period/ms (50 Hz)]</u> | <u>Results</u> |
|------------------------------------|----------------------------------------|----------------|
| <input type="checkbox"/> 20 % dip  | <input type="checkbox"/> 250 /5000     | _____          |
| <input type="checkbox"/> 30 % dip  | <input type="checkbox"/> 25 /500       | _____          |
| <input type="checkbox"/> 60 % dip  | <input type="checkbox"/> 10 /200       | _____          |
| <input type="checkbox"/> 100 % dip | <input type="checkbox"/> 250 /5000     | _____          |

- Voltage variations

|                                      |                                       |       |
|--------------------------------------|---------------------------------------|-------|
| <input type="checkbox"/> Unom + 10 % | <input type="checkbox"/> 253 V (ac)   | _____ |
| <input type="checkbox"/> Unom - 15 % | <input type="checkbox"/> 195.5 V (ac) | _____ |

Observations:

Complied – No degradation of function

### Test Results

- ☐ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria  
☒ NOT APPLICABLE

### Remarks

N/A



## APPENDIX A – TEST DATA

### Conducted Emissions at Mains Power Ports

[HOT]

N/A

#### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-16T0680-R1  
Page (43) of (82)

**[NEUTRAL]**

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




## Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

### Common Information

Test Description: Telecommunication Emission  
Model No.: XND-6080VP  
Mode: DC 12 V\_10 Mbps  
Operator Name: KES

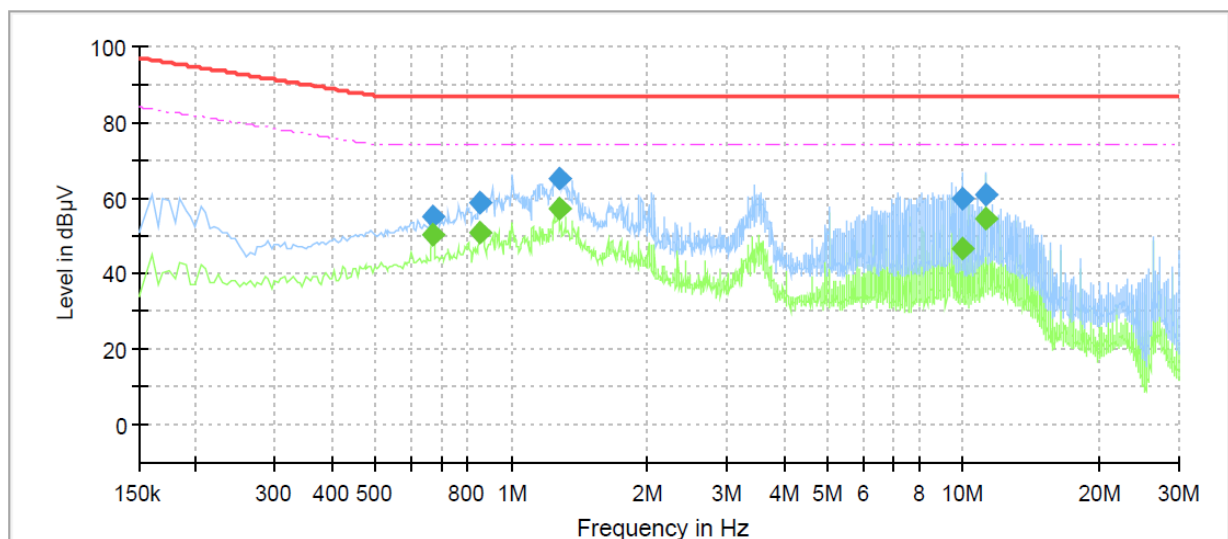

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.670000        | ---              | 50.41           | 74.00        | 23.59       | 1000.0          | 9.000           | Single Line | 10.1       |
| 0.670000        | 55.03            | ---             | 87.00        | 31.97       | 1000.0          | 9.000           | Single Line | 10.1       |
| 0.855000        | ---              | 50.62           | 74.00        | 23.38       | 1000.0          | 9.000           | Single Line | 10.2       |
| 0.855000        | 58.79            | ---             | 87.00        | 28.21       | 1000.0          | 9.000           | Single Line | 10.2       |
| 1.270000        | ---              | 57.37           | 74.00        | 16.63       | 1000.0          | 9.000           | Single Line | 10.2       |
| 1.270000        | 65.00            | ---             | 87.00        | 22.00       | 1000.0          | 9.000           | Single Line | 10.2       |
| 9.995000        | ---              | 46.42           | 74.00        | 27.58       | 1000.0          | 9.000           | Single Line | 10.0       |
| 9.995000        | 60.02            | ---             | 87.00        | 26.98       | 1000.0          | 9.000           | Single Line | 10.0       |
| 11.250000       | ---              | 54.30           | 74.00        | 19.70       | 1000.0          | 9.000           | Single Line | 10.0       |
| 11.250000       | 60.73            | ---             | 87.00        | 26.27       | 1000.0          | 9.000           | Single Line | 10.0       |

#### ◆ Calculation

QuasiPeak[dBμV] / CAverage [dBμV] = Reading Value[dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)



**[100 Mbps]**

## Common Information

Test Description: Telecommunication Emission  
Model No.: XND-6080VP  
Mode: DC 12 V\_100 Mbps  
Operator Name: KES

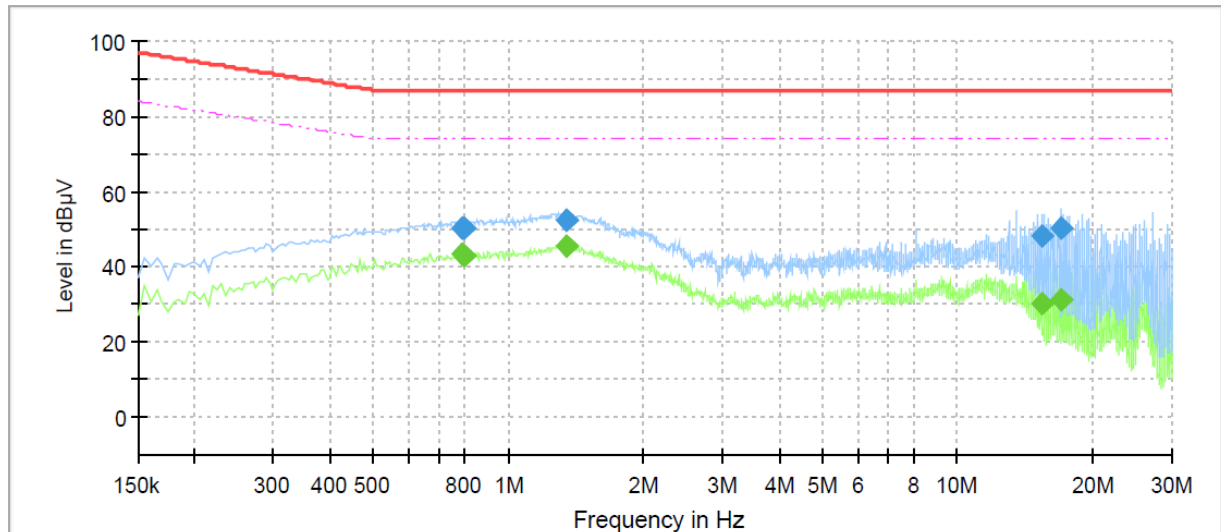

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.785000        | ---              | 43.26           | 74.00        | 30.74       | 1000.0          | 9.000           | Single Line | 9.7        |
| 0.785000        | 50.37            | ---             | 87.00        | 36.63       | 1000.0          | 9.000           | Single Line | 9.7        |
| 0.795000        | ---              | 42.85           | 74.00        | 31.15       | 1000.0          | 9.000           | Single Line | 9.7        |
| 0.795000        | 50.31            | ---             | 87.00        | 36.69       | 1000.0          | 9.000           | Single Line | 9.7        |
| 1.345000        | ---              | 45.27           | 74.00        | 28.73       | 1000.0          | 9.000           | Single Line | 9.7        |
| 1.345000        | 52.28            | ---             | 87.00        | 34.72       | 1000.0          | 9.000           | Single Line | 9.7        |
| 1.350000        | ---              | 45.28           | 74.00        | 28.72       | 1000.0          | 9.000           | Single Line | 9.7        |
| 1.350000        | 52.32            | ---             | 87.00        | 34.68       | 1000.0          | 9.000           | Single Line | 9.7        |
| 15.330000       | ---              | 30.37           | 74.00        | 43.63       | 1000.0          | 9.000           | Single Line | 9.6        |
| 15.330000       | 47.95            | ---             | 87.00        | 39.05       | 1000.0          | 9.000           | Single Line | 9.6        |
| 16.975000       | ---              | 31.10           | 74.00        | 42.90       | 1000.0          | 9.000           | Single Line | 9.7        |
| 16.975000       | 50.46            | ---             | 87.00        | 36.54       | 1000.0          | 9.000           | Single Line | 9.7        |

### ◆ Calculation

QuasiPeak[dBμV] / CAverage [dBμV] = Reading Value[dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

- PoE Mode

**[10 Mbps]**

## Common Information

Test Description: Telecommunication Emission  
Model No.: XND-6080VP  
Mode: PoE\_10 Mbps  
Operator Name: KES

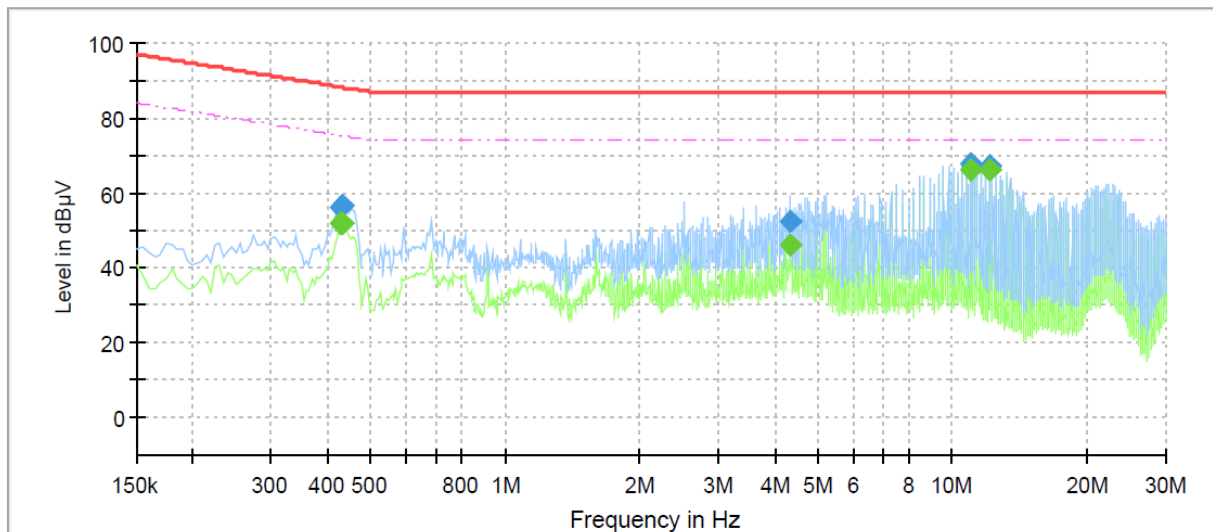

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.430000        | ---              | 51.65           | 75.25        | 23.60       | 1000.0          | 9.000           | Single Line | 10.1       |
| 0.430000        | 56.11            | ---             | 88.25        | 32.14       | 1000.0          | 9.000           | Single Line | 10.1       |
| 0.435000        | ---              | 51.80           | 75.16        | 23.36       | 1000.0          | 9.000           | Single Line | 10.1       |
| 0.435000        | 56.40            | ---             | 88.16        | 31.76       | 1000.0          | 9.000           | Single Line | 10.1       |
| 4.350000        | ---              | 45.81           | 74.00        | 28.19       | 1000.0          | 9.000           | Single Line | 10.1       |
| 4.350000        | 52.63            | ---             | 87.00        | 34.37       | 1000.0          | 9.000           | Single Line | 10.1       |
| 10.935000       | ---              | 66.06           | 74.00        | 7.94        | 1000.0          | 9.000           | Single Line | 10.0       |
| 10.935000       | 67.60            | ---             | 87.00        | 19.40       | 1000.0          | 9.000           | Single Line | 10.0       |
| 12.075000       | ---              | 66.21           | 74.00        | 7.79        | 1000.0          | 9.000           | Single Line | 10.0       |
| 12.075000       | 67.40            | ---             | 87.00        | 19.60       | 1000.0          | 9.000           | Single Line | 10.0       |

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

## [100 Mbps]

### Common Information

Test Description: Telecommunication Emission  
Model No.: XND-6080VP  
Mode: PoE\_100 Mbps  
Operator Name: KES

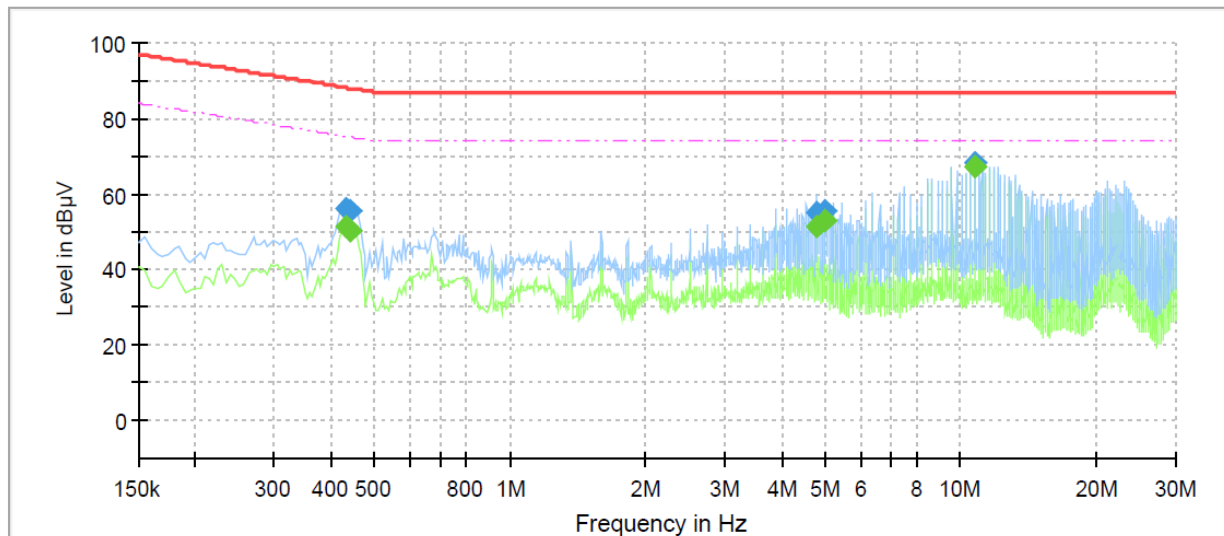

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.435000        | ---              | 51.52           | 75.16        | 23.64       | 1000.0          | 9.000           | Single Line | 9.6        |
| 0.435000        | 56.13            | ---             | 88.16        | 32.03       | 1000.0          | 9.000           | Single Line | 9.6        |
| 0.440000        | ---              | 50.28           | 75.06        | 24.78       | 1000.0          | 9.000           | Single Line | 9.6        |
| 0.440000        | 55.46            | ---             | 88.06        | 32.60       | 1000.0          | 9.000           | Single Line | 9.6        |
| 4.785000        | ---              | 51.34           | 74.00        | 22.66       | 1000.0          | 9.000           | Single Line | 9.6        |
| 4.785000        | 55.19            | ---             | 87.00        | 31.81       | 1000.0          | 9.000           | Single Line | 9.6        |
| 5.015000        | ---              | 53.06           | 74.00        | 20.94       | 1000.0          | 9.000           | Single Line | 9.6        |
| 5.015000        | 55.72            | ---             | 87.00        | 31.28       | 1000.0          | 9.000           | Single Line | 9.6        |
| 10.710000       | ---              | 67.25           | 74.00        | 6.75        | 1000.0          | 9.000           | Single Line | 9.5        |
| 10.710000       | 68.06            | ---             | 87.00        | 18.94       | 1000.0          | 9.000           | Single Line | 9.5        |

#### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

**Radiated Electric Field Emissions(Below 1 GHz)**

- DC 12 V Mode

| Frequency | Amplitude    | ANT             | ANT. Height | Correction Factor |               | Corrected Amplitude | Applicable Limit | Margin |
|-----------|--------------|-----------------|-------------|-------------------|---------------|---------------------|------------------|--------|
| [MHz]     | [dB $\mu$ V] | Polar.<br>(H/V) | [m]         | ANT.<br>[dB/m]    | Cable<br>[dB] | [dB $\mu$ V/m]      | [dB $\mu$ V/m]   | [dB]   |
| 225.81    | 11.68        | H               | 4.00        | 11.87             | 4.43          | 27.98               | 40.00            | 12.02  |
| 425.53    | 12.82        | H               | 4.00        | 16.06             | 6.49          | 35.37               | 47.00            | 11.63  |
| 452.80    | 10.84        | H               | 3.20        | 16.44             | 6.81          | 34.09               | 47.00            | 12.91  |
| 600.13    | 10.19        | H               | 2.90        | 19.30             | 7.83          | 37.32               | 47.00            | 9.68   |
| 612.69    | 8.76         | V               | 1.70        | 19.35             | 7.91          | 36.02               | 47.00            | 10.98  |
| 623.99    | 10.38        | V               | 2.00        | 19.40             | 7.99          | 37.77               | 47.00            | 9.23   |

\* H : Horizontal, V : Vertical

## ◆ Calculation

Corrected Amplitude [dB $\mu$ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- PoE Mode

| Frequency | Amplitude    | ANT             | ANT. Height | Correction Factor |               | Corrected Amplitude | Applicable Limit | Margin |
|-----------|--------------|-----------------|-------------|-------------------|---------------|---------------------|------------------|--------|
| [MHz]     | [dB $\mu$ V] | Polar.<br>(H/V) | [m]         | ANT.<br>[dB/m]    | Cable<br>[dB] | [dB $\mu$ V/m]      | [dB $\mu$ V/m]   | [dB]   |
| 50.20     | 11.32        | V               | 1.00        | 13.92             | 2.10          | 27.34               | 40.00            | 12.66  |
| 151.19    | 15.80        | H               | 4.00        | 8.24              | 3.58          | 27.62               | 40.00            | 12.38  |
| 475.03    | 11.03        | H               | 4.00        | 16.75             | 6.90          | 34.68               | 47.00            | 12.32  |
| 525.46    | 10.24        | V               | 1.90        | 17.66             | 7.21          | 35.11               | 47.00            | 11.89  |
| 574.99    | 7.53         | V               | 1.50        | 18.75             | 7.62          | 33.90               | 47.00            | 13.10  |
| 600.73    | 8.38         | V               | 2.00        | 19.30             | 7.83          | 35.51               | 47.00            | 11.49  |

\* H : Horizontal, V : Vertical

## ◆ Calculation


Corrected Amplitude [dB $\mu$ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

## Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

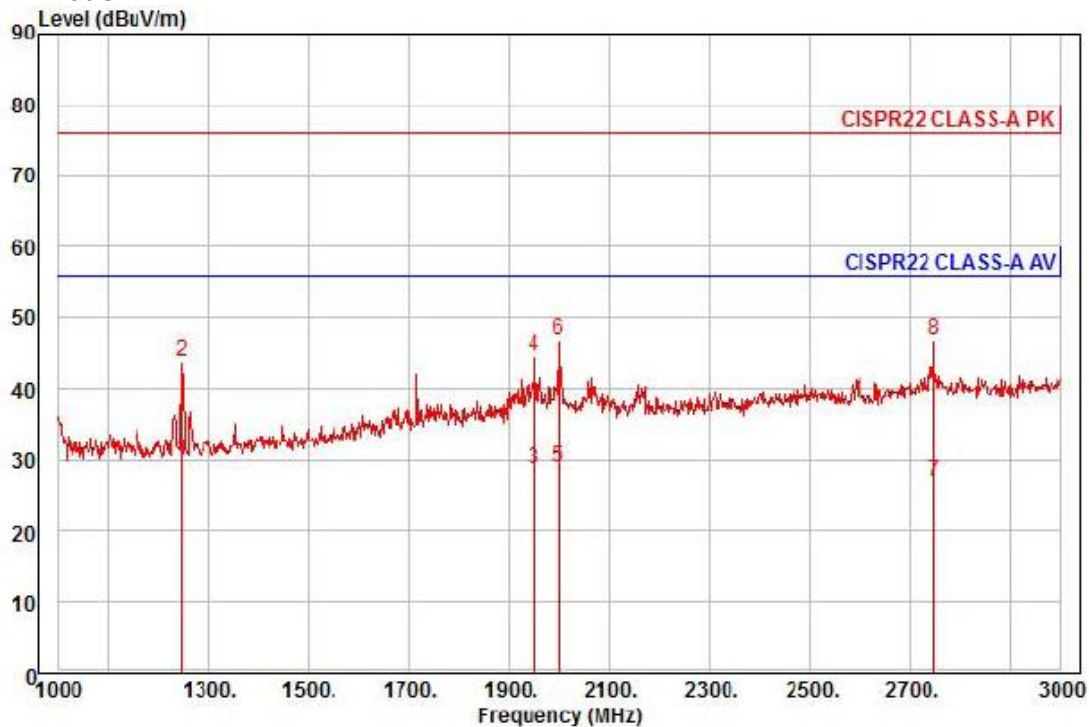


Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project : NETWORK CAMERA  
Model : XND-6080VP  
Mode : DC 12 V  
Memo : 1 ~ 3 GHz

|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase  | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|------------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |            |         |
| 1 pp | 1246.00 | 37.24      | 24.89      | 7.27       | 39.50         | 303  | 56.00      | -26.10     | horizontal | Average |
| 2    | 1246.00 | 51.31      | 24.89      | 7.27       | 39.50         | 303  | 76.00      | -32.03     | horizontal | Peak    |
| 3    | 1950.00 | 31.30      | 27.68      | 9.21       | 39.39         | 153  | 56.00      | -27.20     | horizontal | Average |
| 4    | 1950.00 | 47.20      | 27.68      | 9.21       | 39.39         | 153  | 76.00      | -31.30     | horizontal | Peak    |
| 5    | 2000.00 | 31.07      | 27.88      | 9.34       | 39.41         | 239  | 56.00      | -27.12     | horizontal | Average |
| 6    | 2000.00 | 48.98      | 27.88      | 9.34       | 39.41         | 239  | 76.00      | -29.21     | horizontal | Peak    |
| 7    | 2748.00 | 25.91      | 29.71      | 11.11      | 39.82         | 2    | 56.00      | -29.09     | horizontal | Average |
| 8 pk | 2748.00 | 45.87      | 29.71      | 11.11      | 39.82         | 2    | 76.00      | -29.13     | horizontal | Peak    |

### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

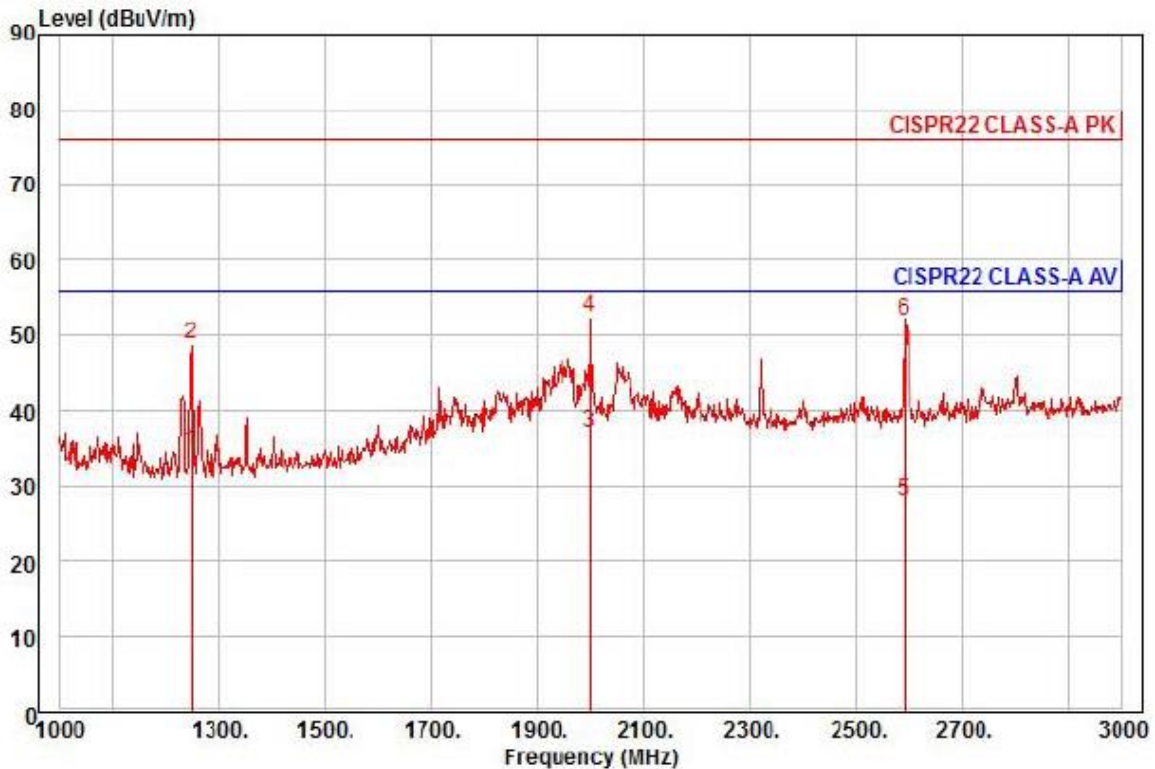


Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project : NETWORK CAMERA  
Model : XND-6080VP  
Mode : DC 12 V  
Memo : 1 ~ 3 GHz

|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|-----------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |           |         |
| 1    | 1248.00 | 41.82      | 24.89      | 7.28       | 39.49         | 188  | 56.00      | -21.50     | vertical  | Average |
| 2    | 1248.00 | 56.06      | 24.89      | 7.28       | 39.49         | 188  | 76.00      | -27.26     | vertical  | Peak    |
| 3 pp | 2000.00 | 39.24      | 27.88      | 9.34       | 39.41         | 321  | 56.00      | -18.95     | vertical  | Average |
| 4 pk | 2000.00 | 54.59      | 27.88      | 9.34       | 39.41         | 321  | 76.00      | -23.60     | vertical  | Peak    |
| 5    | 2590.00 | 27.57      | 29.33      | 10.72      | 39.64         | 237  | 56.00      | -28.02     | vertical  | Average |
| 6    | 2590.00 | 51.52      | 29.33      | 10.72      | 39.64         | 237  | 76.00      | -24.07     | vertical  | Peak    |

# Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

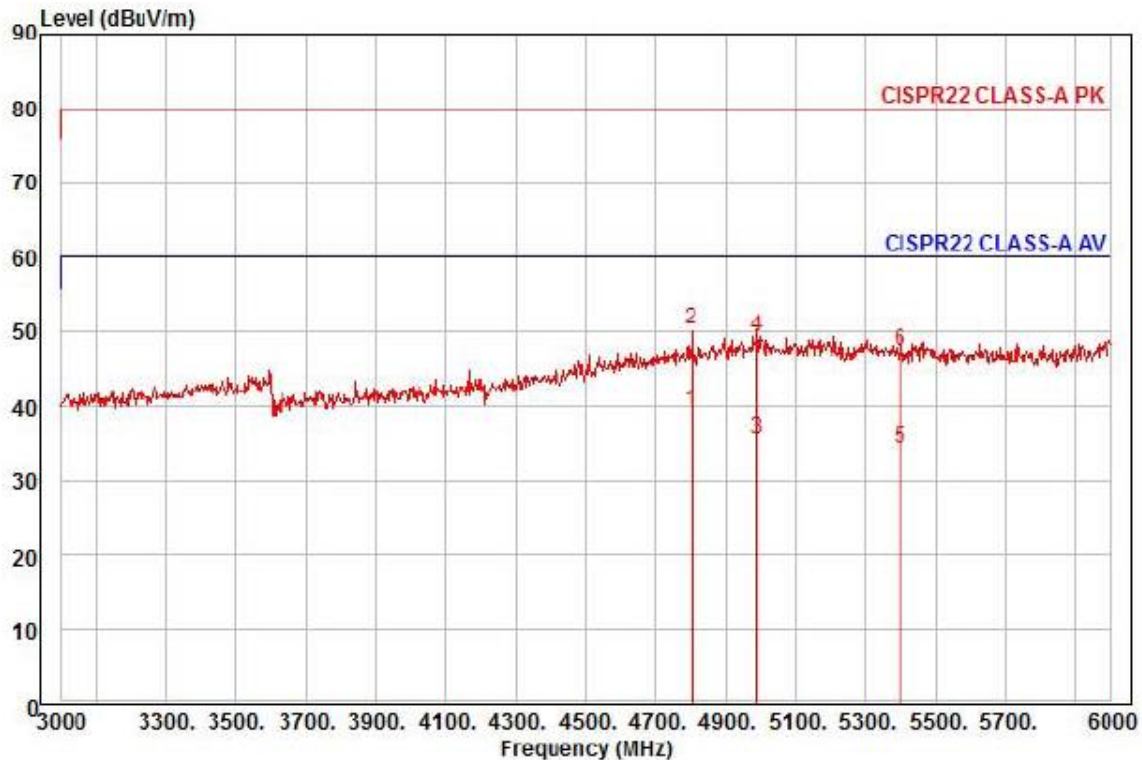


Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project : NETWORK CAMERA  
Model : XND-6080VP  
Mode : DC 12 V  
Memo : 3 ~ 6 GHz

|   |      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |                    |
|---|------|---------|--------|-------|--------|-------|--------|-------|-----------|--------------------|
|   | Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark             |
|   | MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |                    |
| 1 | pp   | 4800.00 | 28.08  | 36.58 | 15.10  | 40.47 | 146    | 60.00 | -20.71    | horizontal Average |
| 2 | pk   | 4800.00 | 38.97  | 36.58 | 15.10  | 40.47 | 146    | 80.00 | -29.82    | horizontal Peak    |
| 3 |      | 4986.00 | 22.86  | 37.64 | 15.30  | 40.28 | 115    | 60.00 | -24.48    | horizontal Average |
| 4 |      | 4986.00 | 36.55  | 37.64 | 15.30  | 40.28 | 115    | 80.00 | -30.79    | horizontal Peak    |
| 5 |      | 5400.00 | 22.36  | 36.91 | 16.04  | 40.93 | 113    | 60.00 | -25.62    | horizontal Average |
| 6 |      | 5400.00 | 35.39  | 36.91 | 16.04  | 40.93 | 113    | 80.00 | -32.59    | horizontal Peak    |

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

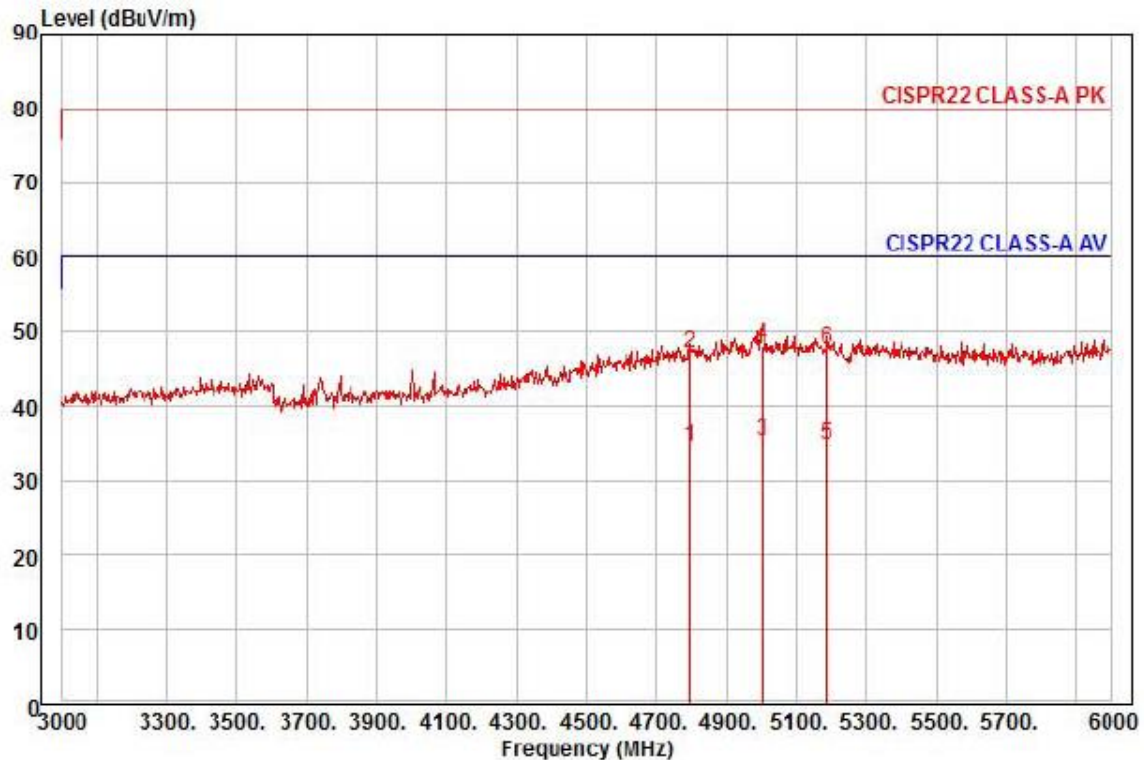

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project : NETWORK CAMERA  
Model : XND-6080VP  
Mode : DC 12 V  
Memo : 3 ~ 6 GHz


|      | Read    | Ant    | Cable | Preamp | TPos  | Limit  | Over  |           |          |
|------|---------|--------|-------|--------|-------|--------|-------|-----------|----------|
| Freq | Level   | Factor | Loss  | Factor |       | Line   | Limit | Pol/Phase | Remark   |
| MHz  | dBuV    | dB/m   | dB    | dB     | deg   | dBuV/m | dB    |           |          |
| 1    | 4794.00 | 23.40  | 36.54 | 15.08  | 40.48 | 125    | 60.00 | -25.46    | vertical |
| 2    | 4794.00 | 36.04  | 36.54 | 15.08  | 40.48 | 125    | 80.00 | -32.82    | vertical |
| 3 pp | 5001.00 | 22.66  | 37.72 | 15.32  | 40.27 | 73     | 60.00 | -24.57    | vertical |
| 4 pk | 5001.00 | 35.36  | 37.72 | 15.32  | 40.27 | 73     | 80.00 | -31.87    | vertical |
| 5    | 5184.00 | 22.29  | 37.35 | 15.68  | 40.58 | 218    | 60.00 | -25.26    | vertical |
| 6    | 5184.00 | 35.03  | 37.35 | 15.68  | 40.58 | 218    | 80.00 | -32.52    | vertical |

# Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

# - PoE Mode

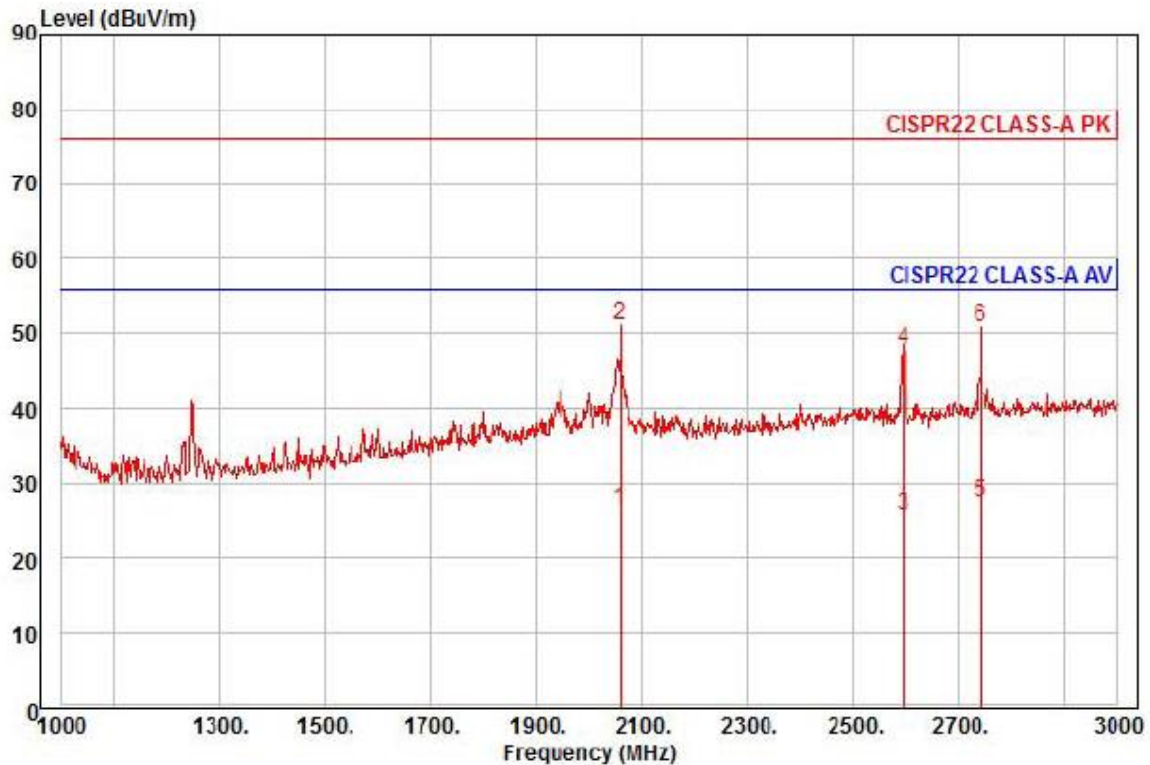


Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project : NETWORK CAMERA  
Model : XND-6080VP  
Mode : PoE  
Memo : 1 ~ 3 GHz

|      |         | Read  | Ant    | Cable | Preamp | TPos | Limit  | Over   |            |         |
|------|---------|-------|--------|-------|--------|------|--------|--------|------------|---------|
|      | Freq    | Level | Factor | Loss  | Factor |      | Line   | Limit  | Pol/Phase  | Remark  |
|      | MHz     | dBuV  | dB/m   | dB    | dB     | deg  | dBuV/m | dB     |            |         |
| 1    | 2058.00 | 28.37 | 28.02  | 9.47  | 39.41  | 144  | 56.00  | -29.55 | horizontal | Average |
| 2 pp | 2058.00 | 53.29 | 28.02  | 9.47  | 39.41  | 144  | 76.00  | -24.63 | horizontal | Peak    |
| 3    | 2596.00 | 25.29 | 29.34  | 10.73 | 39.65  | 231  | 56.00  | -30.29 | horizontal | Average |
| 4    | 2596.00 | 47.34 | 29.34  | 10.73 | 39.65  | 231  | 76.00  | -28.24 | horizontal | Peak    |
| 5 av | 2744.00 | 26.51 | 29.70  | 11.10 | 39.82  | 38   | 56.00  | -28.51 | horizontal | Average |
| 6    | 2744.00 | 50.00 | 29.70  | 11.10 | 39.82  | 38   | 76.00  | -25.02 | horizontal | Peak    |

## ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

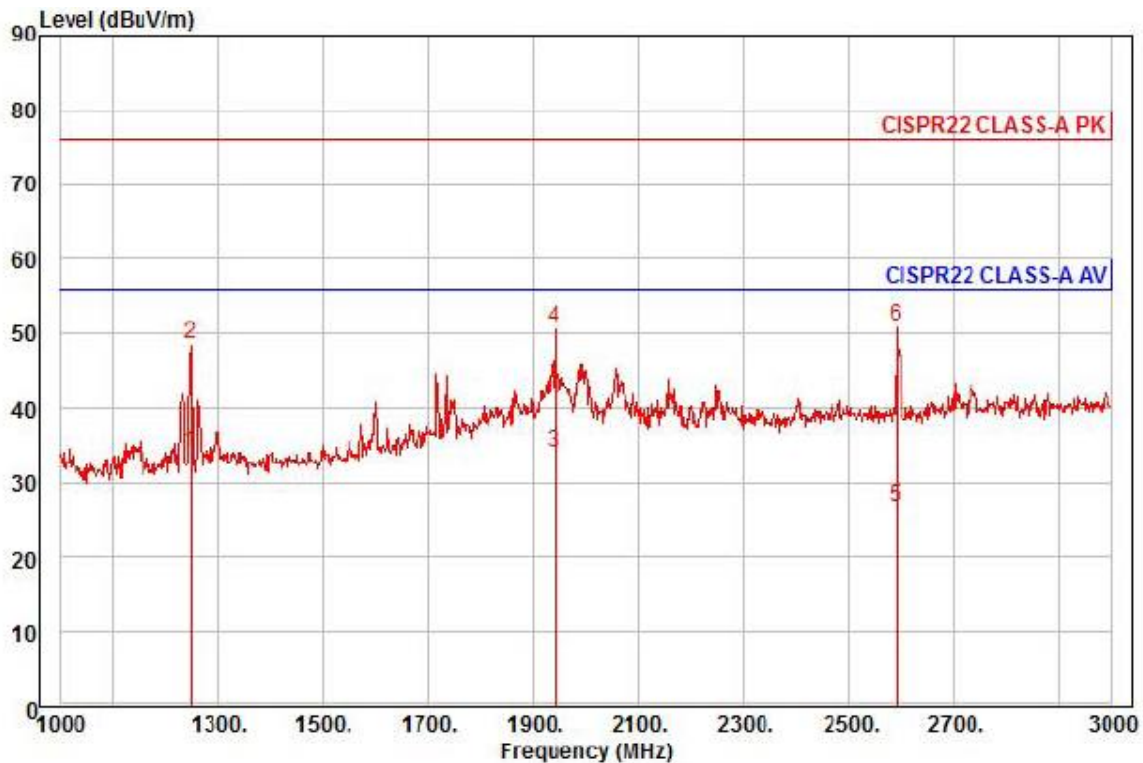

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project : NETWORK CAMERA  
Model : XND-6080VP  
Mode : PoE  
Memo : 1 ~ 3 GHz

|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|-----------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |           |         |
| 1 pp | 1248.00 | 41.39      | 24.89      | 7.28       | 39.49         | 164  | 56.00      | -21.93     | vertical  | Average |
| 2    | 1248.00 | 55.79      | 24.89      | 7.28       | 39.49         | 164  | 76.00      | -27.53     | vertical  | Peak    |
| 3    | 1940.00 | 36.58      | 27.64      | 9.18       | 39.38         | 218  | 56.00      | -21.98     | vertical  | Average |
| 4    | 1940.00 | 53.26      | 27.64      | 9.18       | 39.38         | 218  | 76.00      | -25.30     | vertical  | Peak    |
| 5    | 2590.00 | 26.26      | 29.33      | 10.72      | 39.64         | 235  | 56.00      | -29.33     | vertical  | Average |
| 6 pk | 2590.00 | 50.67      | 29.33      | 10.72      | 39.64         | 235  | 76.00      | -24.92     | vertical  | Peak    |

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor




# KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-16T0680-R1

Page (55) of (82)

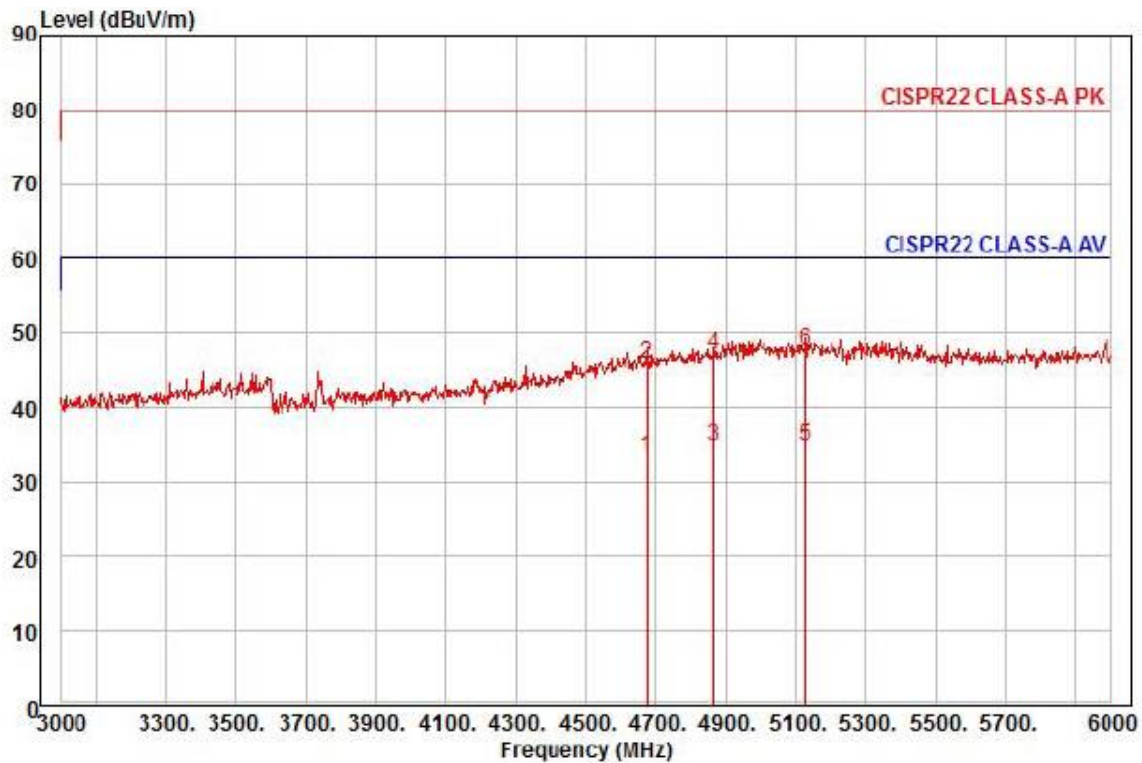

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project : NETWORK CAMERA  
Model : XND-6080VP  
Mode : PoE  
Memo : 3 ~ 6 GHz


|      | Freq    | Read Level | Ant Factor | Cable Loss | Preamp Factor | TPos | Limit Line | Over Limit | Pol/Phase  | Remark  |
|------|---------|------------|------------|------------|---------------|------|------------|------------|------------|---------|
|      | MHz     | dBuV       | dB/m       | dB         | dB            | deg  | dBuV/m     | dB         |            |         |
| 1    | 4677.00 | 23.16      | 35.88      | 14.83      | 40.59         | 357  | 60.00      | -26.72     | horizontal | Average |
| 2    | 4677.00 | 35.73      | 35.88      | 14.83      | 40.59         | 357  | 80.00      | -34.15     | horizontal | Peak    |
| 3 pp | 4866.00 | 23.09      | 36.95      | 15.17      | 40.40         | 50   | 60.00      | -25.19     | horizontal | Average |
| 4    | 4866.00 | 35.41      | 36.95      | 15.17      | 40.40         | 50   | 80.00      | -32.87     | horizontal | Peak    |
| 5    | 5127.00 | 22.25      | 37.46      | 15.57      | 40.48         | 29   | 60.00      | -25.20     | horizontal | Average |
| 6 pk | 5127.00 | 34.99      | 37.46      | 15.57      | 40.48         | 29   | 80.00      | -32.46     | horizontal | Peak    |

## ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

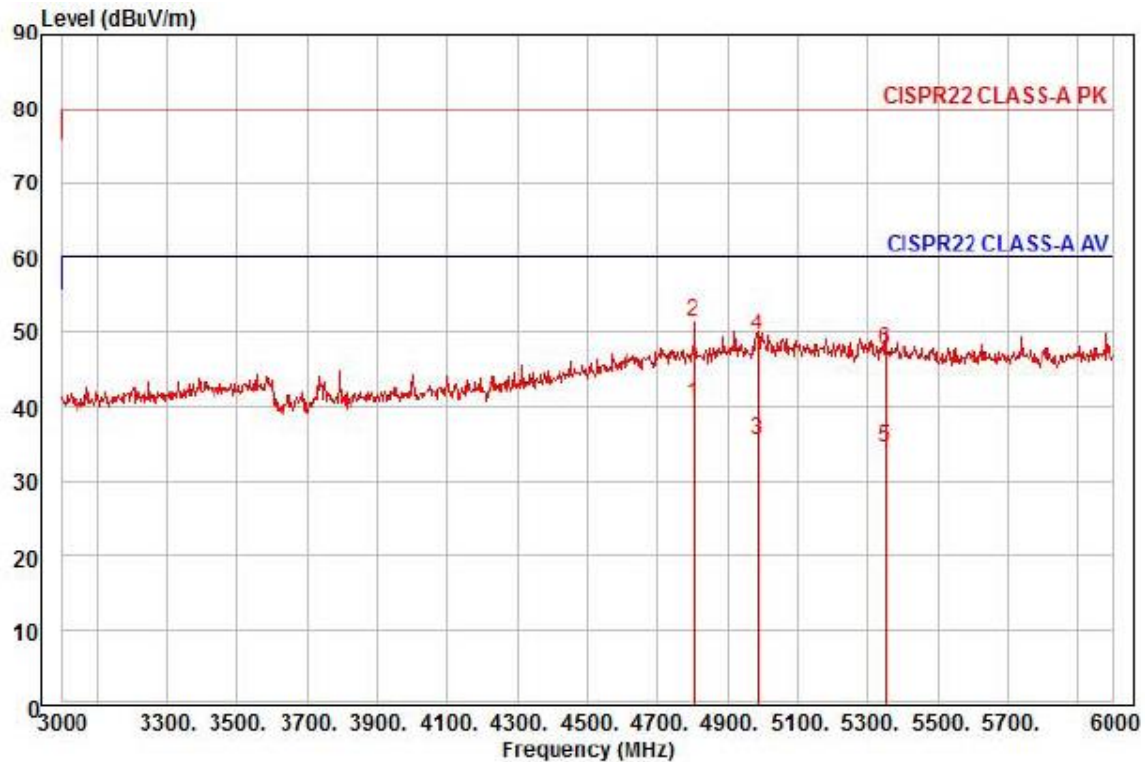

Site : chamber

Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project : NETWORK CAMERA

Model : XND-6080VP

Mode : PoE


Memo : 3 ~ 6 GHz


|      |         | Read  | Ant    | Cable | Preamp | TPos | Limit  | Over   |           |         |
|------|---------|-------|--------|-------|--------|------|--------|--------|-----------|---------|
|      | Freq    | Level | Factor | Loss  | Factor |      | Line   | Limit  | Pol/Phase | Remark  |
|      | MHz     | dBuV  | dB/m   | dB    | dB     | deg  | dBuV/m | dB     |           |         |
| 1 pp | 4800.00 | 29.33 | 36.58  | 15.10 | 40.47  | 32   | 60.00  | -19.46 | vertical  | Average |
| 2 pk | 4800.00 | 40.19 | 36.58  | 15.10 | 40.47  | 32   | 80.00  | -28.60 | vertical  | Peak    |
| 3    | 4983.00 | 22.84 | 37.62  | 15.30 | 40.29  | 64   | 60.00  | -24.53 | vertical  | Average |
| 4    | 4983.00 | 36.85 | 37.62  | 15.30 | 40.29  | 64   | 80.00  | -30.52 | vertical  | Peak    |
| 5    | 5349.00 | 22.45 | 37.02  | 15.95 | 40.85  | 121  | 60.00  | -25.43 | vertical  | Average |
| 6    | 5349.00 | 35.51 | 37.02  | 15.95 | 40.85  | 121  | 80.00  | -32.37 | vertical  | Peak    |

#### ◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor







Test Data - Voltage Fluctuations

**Maximum Flicker results**

|          | <b>EUT values</b> | <b>Limit</b> | <b>Result</b> |
|----------|-------------------|--------------|---------------|
| Pst      | N/A               |              |               |
| Plt      |                   |              |               |
| dc [%]   |                   |              |               |
| dmax [%] |                   |              |               |
| Tmax [s] |                   |              |               |



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
[www.kes.co.kr](http://www.kes.co.kr)

Test report No.:  
KES-E1-16T0680-R1  
Page (60) of (82)

---

## **Test Setup Photos and Configuration**

### **Conducted Voltage Emissions**


N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Conducted Telecommunication Emissions

- DC 12 V Mode

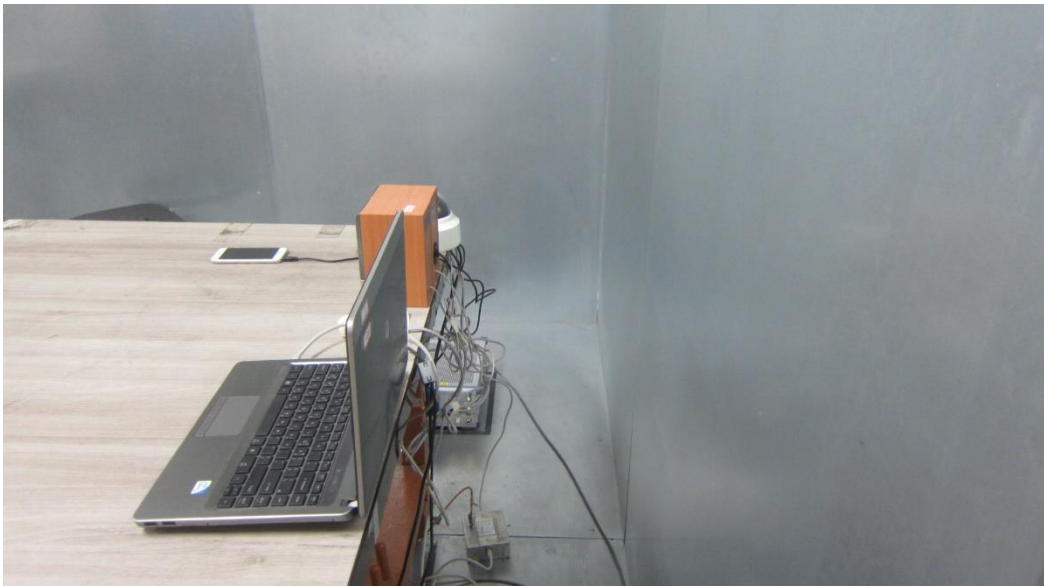

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



## **Radiated Electric Field Emissions(Below 1 GHz)**

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



## Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
[www.kes.co.kr](http://www.kes.co.kr)

Test report No.:  
KES-E1-16T0680-R1  
Page (67) of (82)

---

## Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Electrostatic Discharge

- DC 12 V Mode



- PoE Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Radiated Electric Field Immunity

- DC 12 V Mode




- PoE Mode

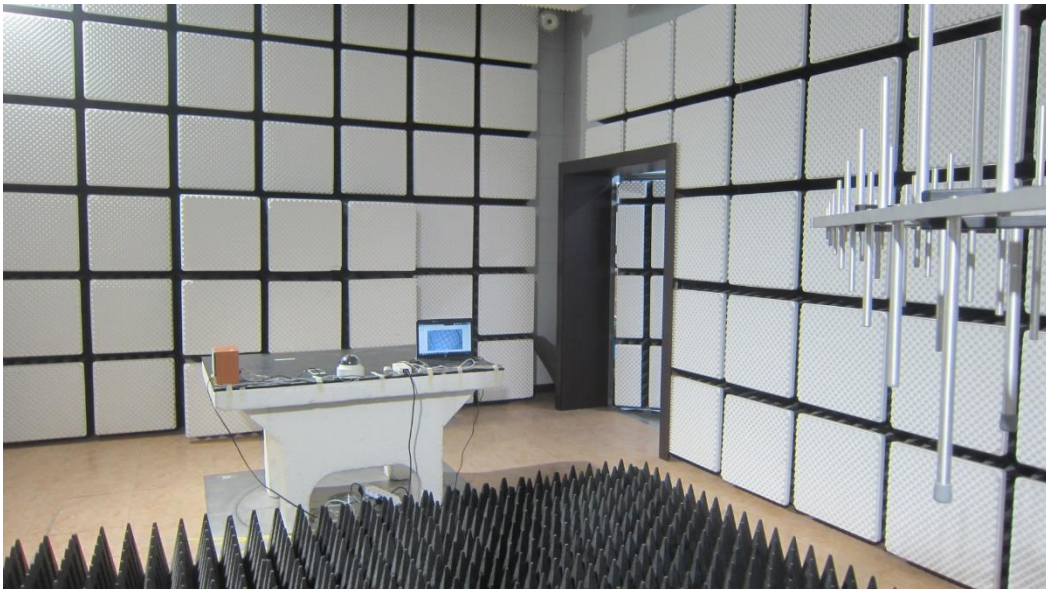

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Electrical Fast Transients/Bursts

- DC 12 V Mode

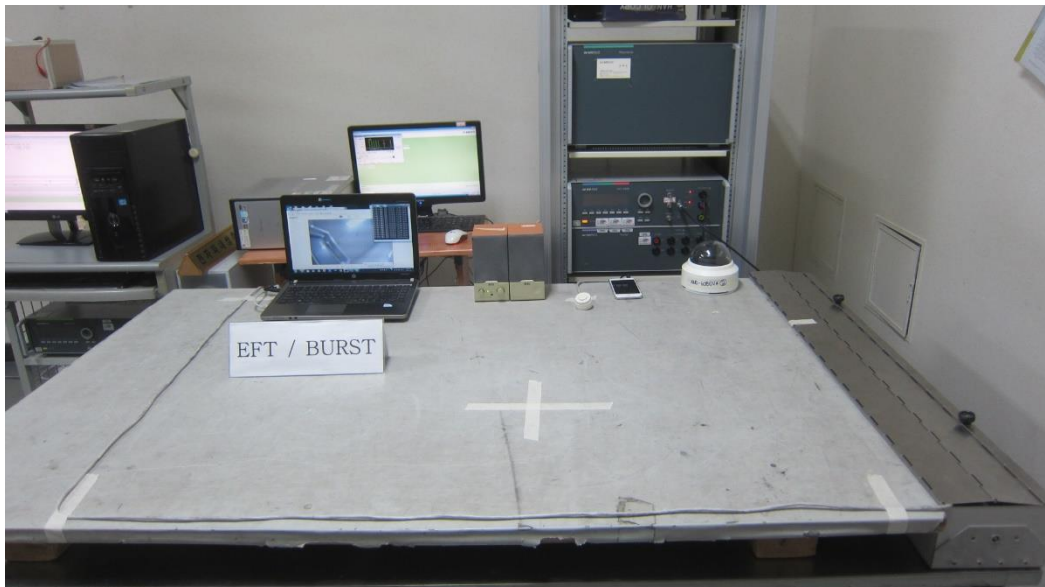

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Surge Transients

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



## Conducted Disturbance

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
[www.kes.co.kr](http://www.kes.co.kr)

Test report No.:  
KES-E1-16T0680-R1  
Page (76) of (82)

---

## **Voltage Dips and Short Interruptions**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## **EUT Internal Photographs**


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Main board

(Top)

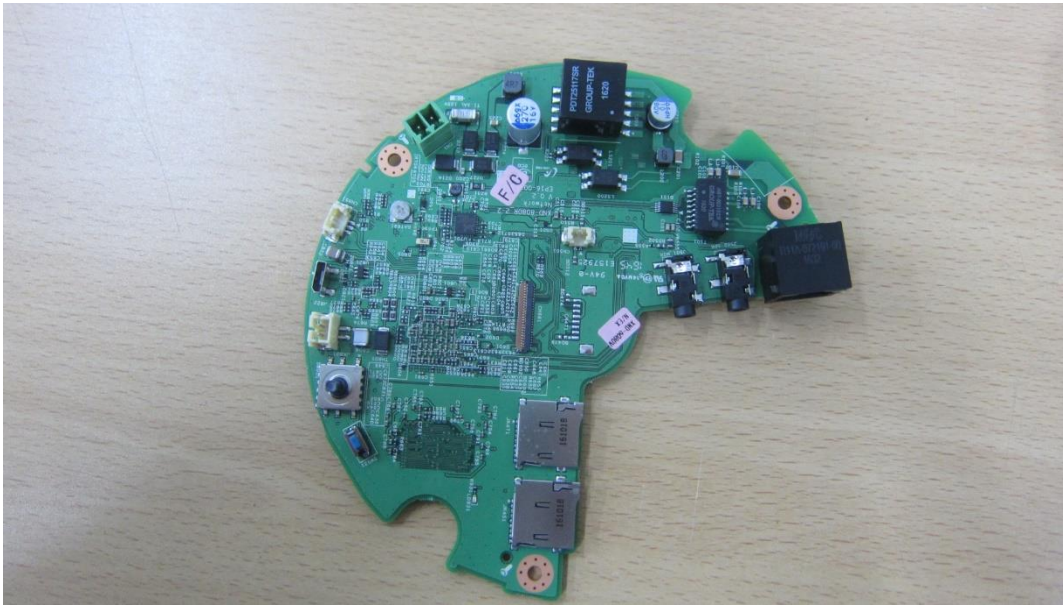


(Bottom)

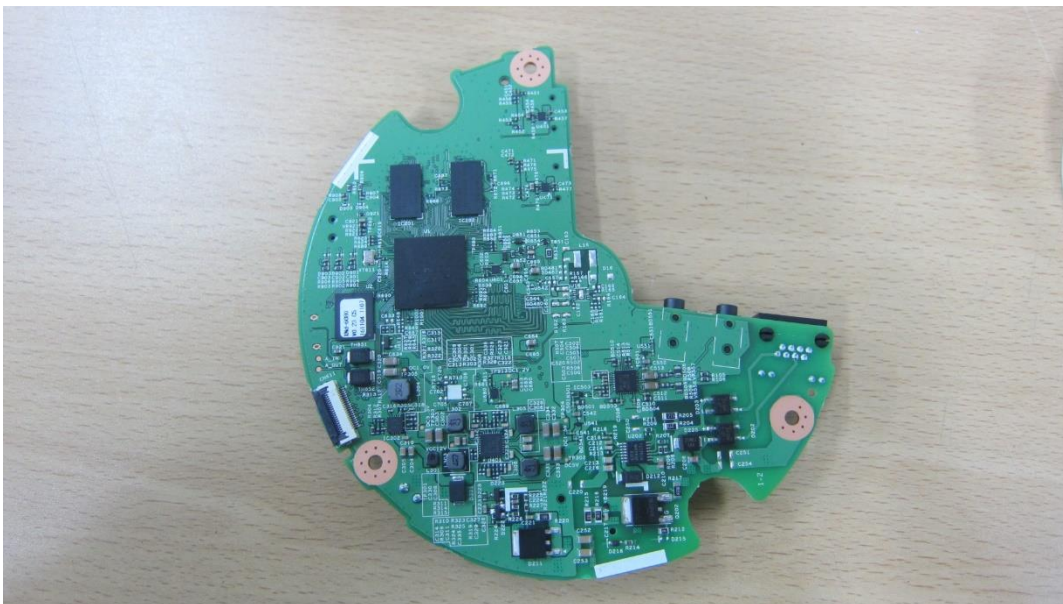


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Sub board

(Top)

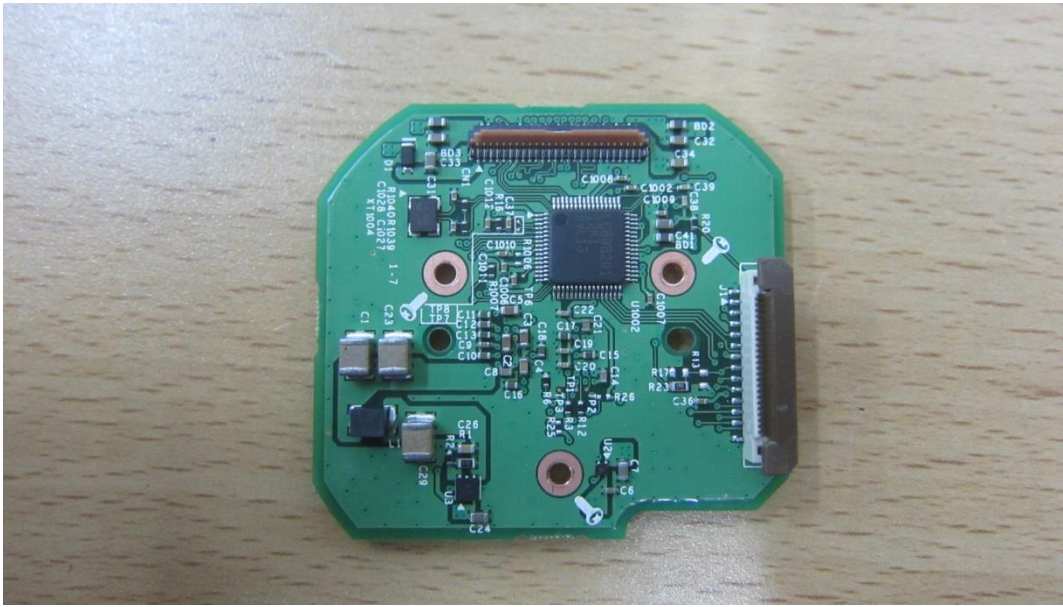

(Bottom)

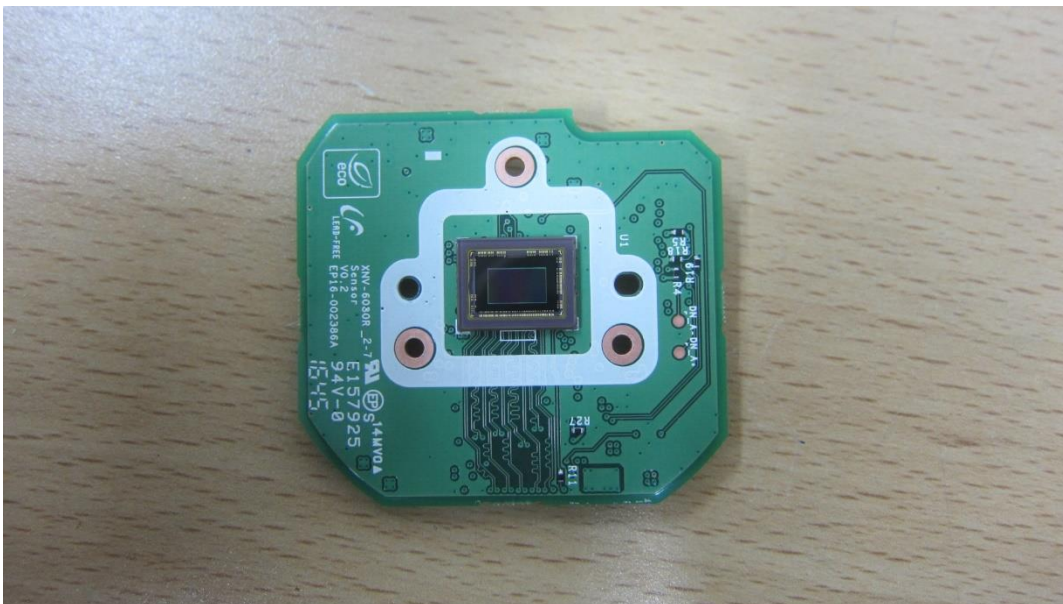

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Lens

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Label and Location



### **NETWORK CAMERA**

Model No : XND-6080VP

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in of China

