

TIGER (PATENTED)

HYDRAULIC SELF-CLOSING HINGE


LOCINOX



**FULL 180°
CLOSING RANGE**



**EASY
TO ADJUST**



**WEATHER
PROOF**



**TIMESAVING
INSTALLATION**



**PRECISION
ENGINEERING**



**BUILT
TO RESIST**



**3 YEAR
WARRANTY**

ZILV 9005



Hydraulic, selfclosing, double bearing hinge with an 180° opening angle that easily closes gates up to 75kg. Closing speed and final snap can be adjusted after installation. Fast and easy fixing with Quick-Fix. Combination with Puma (non-selfclosing) hinge. Conform with Rospa regulations.

- Automatic 180° closure with adjustable closing speed and final snap
- Hydraulic damping
- 180° opening and closing angle
- Powdercoated aluminium casing
- Aesthetic design
- Fast and easy fixing: Quick-Fix
- Closing speed unaffected by humidity and temperature changes
- For gates up to 75kg (max 1,1 m wide)
- For left and right turning gates
- 20 mm vertical adjustability
- 15 Wmm horizontal adjustability
- Aluminium powdercoated PUMA hinge included
- Tested at 500.000 movements
- Tested to -30° C
- Conform with Rospa regulations




Order Code

- TIGER - Hydraulic gate closer and puma 180° hinge for gates up to 75 kg


TURN PAGE FOR
TECHNICAL INFO




TECHNICAL DRAWING

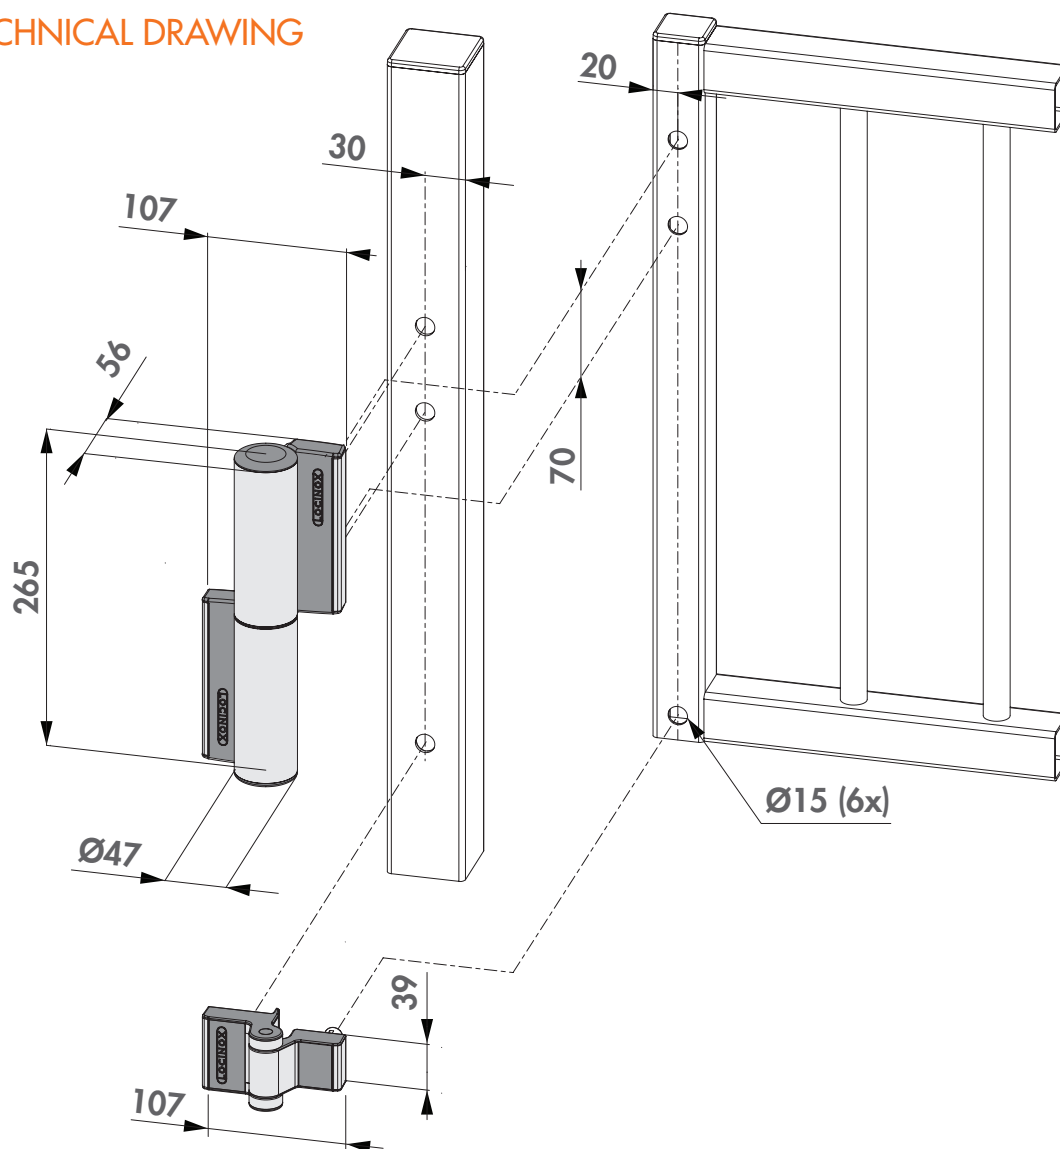

TECHNICAL INFO

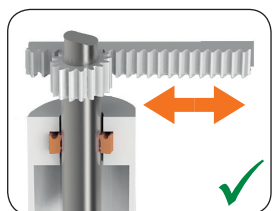

ROTARY SEAL



LINEAR SEAL

DURABLE

When converting the rotational movement into a linear movement, Locinox always uses a rotary seal. The intrusion of dirt and humidity and loss of oil are impossible.



INSTALLATION MOVIE

A new 3D installation movie visualizes every step of the installation process.



Modularity



Ease of Installation



Trusted Quality



Full Support

LOCINOX NV.
B2B-PORTAL
Fast and easy online ordering

+32 56 77 27 66
locinox@locinox.com

www.locinox.com