



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (1) of (99)

EMC TEST REPORT For CE

Test Report No. : KES-E1-17T0006-R1
Date of Issue : Oct, 02, 2017
Product name : NETWORK CAMERA
Model/Type No. : XNV-8080RP
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial
Park, TEDA, Tianjin, 300385, People's Republic of China
Date of Receipt : Nov, 23, 2016
Test date : Dec, 21, 2016 – Dec, 23, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Young Suk, Song
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (2) of (99)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 05, 2017	KES-E1-17T0006	Issued
Oct. 02, 2017	KES-E1-17T0006-R1	Standard Revision

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	E.U.T Operating Mode(s)	9
1.8	Configuration.....	10
1.9	Calibration Details of Equipment Used for Measurement	12
1.10	Test Facility	12
1.11	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	15
2.2	Conducted Emissions at Telecommunication Ports	16
2.3	Radiated Electric Field Emissions(Below 1 GHz)	17
2.4	Radiated Electric Field Emissions(Above 1 GHz)	18
2.5	Harmonic Current Emissions.....	19
2.6	Voltage Fluctuations and Flicker	20
3.0	Criteria for compliance.....	21
3.1	Electrostatic Discharge.....	23
3.2	Radiated Electric Field Immunity	27
3.3	Electrical Fast Transients/Bursts	30
3.4	Surge Transients	33
3.5	Conducted Disturbance	37
3.6	Voltage Dips and Short Interruptions	41
APPENDIX A	– TEST DATA.....	43
	Conducted Emissions at Mains Power Ports.....	43
	Conducted Emissions at Telecommunication Ports	45
	Radiated Electric Field Emissions(Below 1 GHz)	51
	Radiated Electric Field Emissions(Above 1 GHz).....	54
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	66
	Test Setup Photos and Configuration	69
	Conducted Voltage Emissions	69
	Conducted Telecommunication Emissions	70
	Radiated Electric Field Emissions(Below 1 GHz)	73
	Radiated Electric Field Emissions(Above 1 GHz).....	76
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	79
	Electrostatic Discharge	80
	Radiated Electric Field Immunity	82
	Electrical Fast Transients/Bursts	84
	Surge Transients	87
	Conducted Disturbance	89
	Voltage Dips and Short Interruptions.....	92
	EUT External Photographs	93
	EUT Internal Photographs	94



1.0 General Product Description

Main Specifications of E.U.T are:

Video	
Imaging Device	1/1.8" 6M CMOS
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.1 lux(F1.3, 1/30sec) B/W : 0 Lux (F1.3, IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080, for installation
Lens	
Focal Length (Zoom Ratio)	3.9~9.4mm(2.4x) motorized varifocal
Max. Aperture Ratio	F1.3
Angular Field of View	TBD
Min. Object Distance	0.5m (1.64ft)
Focus Control	Simple focus(Motorized V/F) / Manual, Remote control via network(Manual, Simple focus)
Lens Type	DC Auto Iris, P-iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0° ~ 354° / 0° ~ 85°(TBD) / 0° ~ 355°
Operational	
Viewable Length	(TBD)50m(164.04ft)
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	120dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On (Built-in Gyro sensor)
Defog	Auto(input from fog detection) / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones), Hand over
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Medle / High / Manual
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X, 'Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Intelligent Video & Audio A	Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (5) of (99)

Alarm I/O	Input 1ea / Output 1ea
Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Form	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	2560 x 1920, 2560 x 1440, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 720 x 576, 720 x 480, 640 x 480, 320 x 240
Max. Framerate	H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, with WiseStream MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Form	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (6) of (99)

Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.10, 10.11, 10.12 Non-plugin Webviewer Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49, Apple Safari 9 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)
Central Management Soft	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-40°C ~ +55°C (-40°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66, NEMA 4X
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
Mechanical	
Color / Material	Ivory / Aluminum
Dimension (WxHxD)	TBD
Weight	TBD
스펙시트 미표기 요구사항	
Cable Connection	Plug-in
SD카드	듀얼슬롯
Bottom cover	Conduit Hole 1개소

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-8080RP	-	Hanwha Techwin (Tianjin) Co.,Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-3001GC/AC	RD9356082016964 200	Power Dsine	-
Notebook	X56K	HN11N5151FJ0045 W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Phone	A1530	-	APPLE	-
MIC	CMK-303	-	CAMAC	1.7 m
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	1.6 m
Alarm	-	-	-	-



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	3 pin	3.0	U
Notebook	Audio in	Phone	Audio out	1.7	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	3 pin	3.0	U
Notebook	Audio in	Phone	Audio out	1.7	U



- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45 (POE)	POE Adapter	RJ-45 (POE)	3.0	U
	7 Pin	MIC	3.5 mm	1.7	U
		Speaker	3.5 mm	1.6	U
		Alarm	3 pin	3.0	U
Notebook	Audio in	Phone	Audio out	1.7	U
	RJ-45 (DATA)	POE Adapter	RJ-45 (DATA)	3.0	U

* Unshielded=U, Shielded=S

1.7 E.U.T Operating Mode(s)


operating
E.U.T Monitoring , Ping test, 1 kHz

E.U.T Test operating S/W		
Name	Version	Manufacture Company
SmartViewer	-	Hanwha Techwin Co., Ltd.


1.8 Configuration

■ AC 24 V Main
□ DC 12 V Main


- AC 24 V Mode

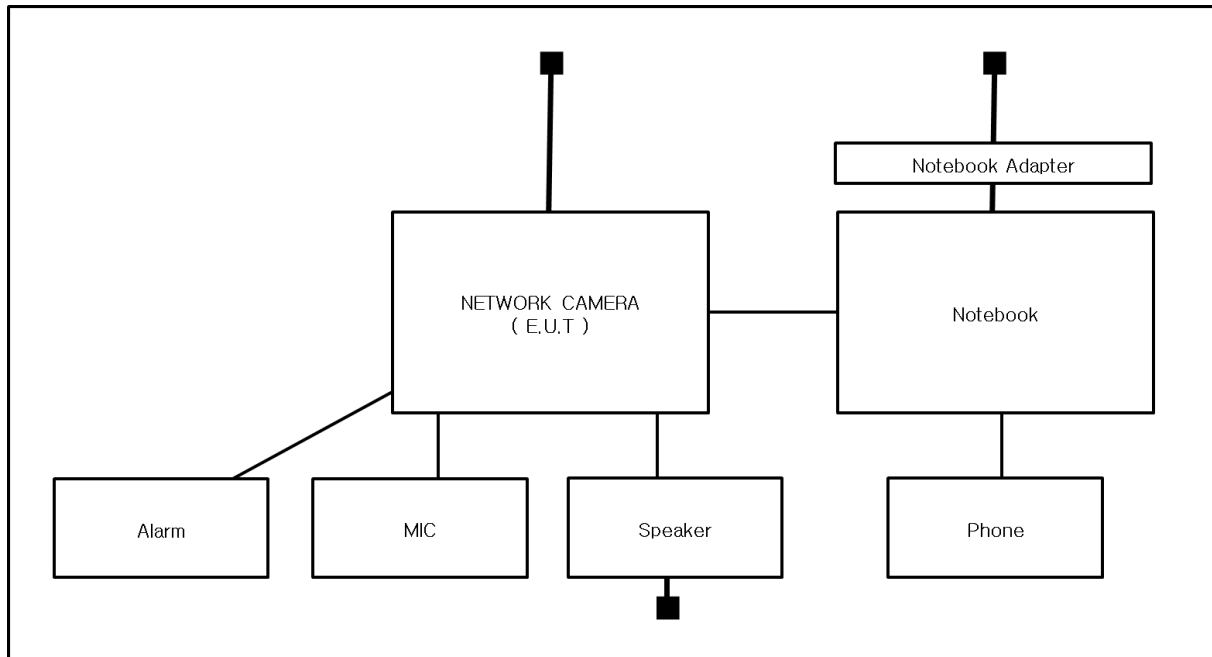

- DC 12 V Mode

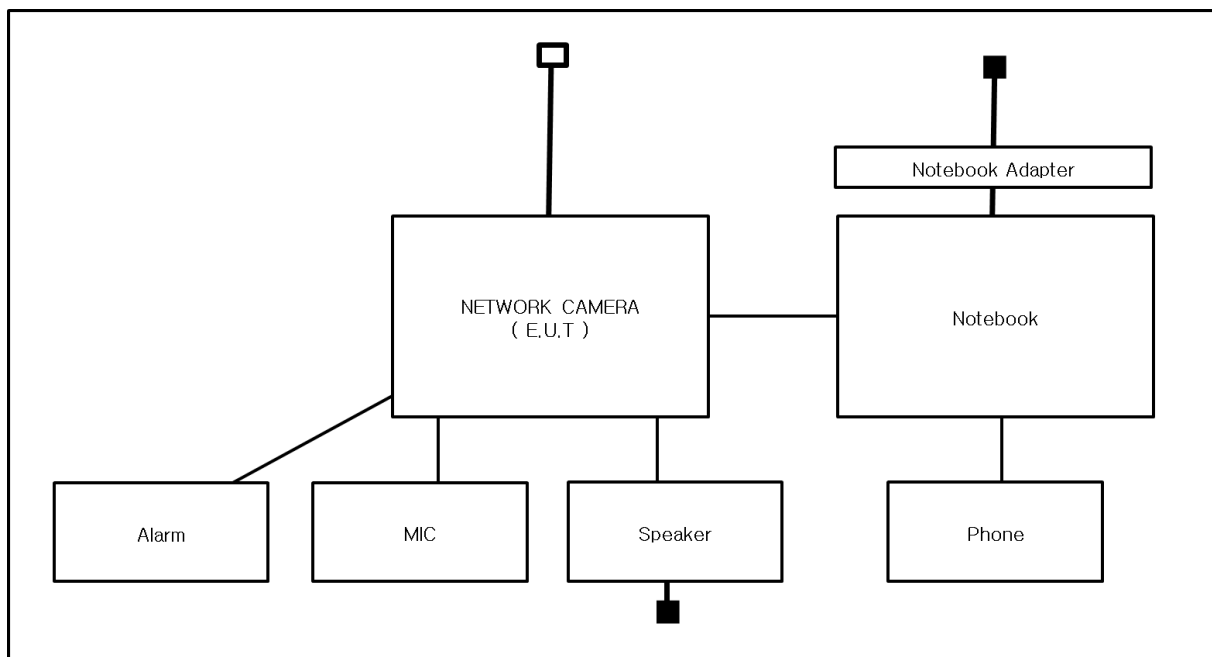

- PoE Mode

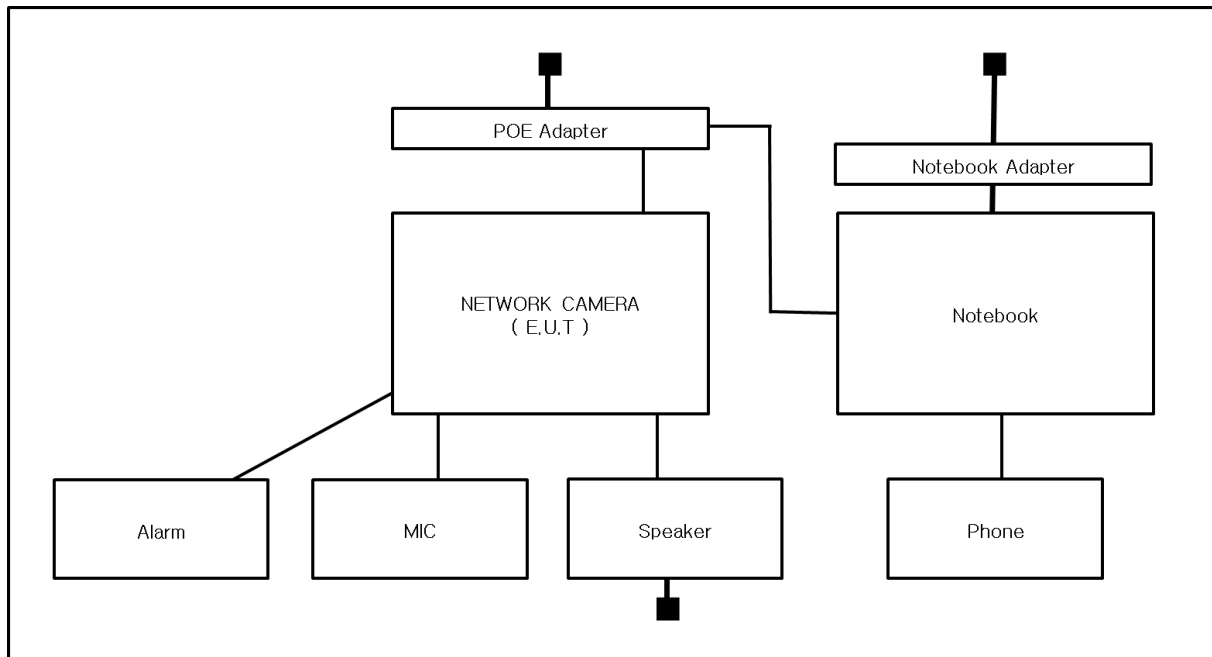

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
☐ RE- Directive 2014/53/EU | | |
|
☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
☐ EN 301 489-3 V1.6.1 | | |
|
☐ EN 301 489-17 V2.2.1 | | |
|
☐ EN 60945:2002 | | |

2.1 Conducted Emissions at Mains Power Ports

Test Date

Dec, 23, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 17,9 °C

Relative Humidity: 49,7 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Dec, 23, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
☒	LISN	ENV216	R&S	101137	02, 04, 2017
☒	LISN	ENV216	R&S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 11, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions

Temperature: 17,9 °C

Relative Humidity: 49,7 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec, 23, 2016

Test Location

☐ Open Area Test Site #1

☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-713	05, 15, 2017
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: -0,4 °C

Relative Humidity: 66,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec, 23, 2016

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 17,9 °C

Relative Humidity: 49,7 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM TEST	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature: °C

Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

N/A : Because the E.U.T power is less than 75 W, limits are not specified.



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM test	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature:

°C

Relative Humidity:

%

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Dec, 22, 2016

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2017
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-
☒	EMS Test S/W	N/A	N/A	N/A	-

Test Conditions

Temperature: 18,9 °C
Relative Humidity: 52,4 %
Atmospheric Pressure: 99,4 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge


Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

Location of Discharge:

Air
Contact





Test Data

- AC 24 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

- DC 12 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (26) of (99)

- PoE Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Dec, 22, 2016

Test Location

EMS-RS: ☐ Semi Anechoic Chamber #1☒ Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Signal Generator	ESG-3000A	HP	US37040210	11, 01, 2017
☒	Amplifier	ITA0300-200	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA0750-200	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA1500-100	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA2500-100	Infinitech	-	11, 01, 2017
☒	GPIO INTERFACE CONTROL	SYSTEM CONTROL UNIT	Infinitech	-	-
☒	POWER SUPPLY	SYSTEM POWER SUPPLY	Infinitech	-	-
☒	Power Meter	E4419B	Agilent	MY45101506	06, 27, 2017
☒	Average Power Sensor	E9301A	Agilent	-	06, 27, 2017
☒	Average Power Sensor	E9301A	Agilent	MY41495698	11, 17, 2017
☒	Stacked Double Log-Per-Antenna	STPL9128 D	SCHWARZBECK	9128D038	-
☒	Amplifier	TK-PA8/3W	TESTEK	150008	06, 27, 2017
☒	COUPLER	ZARC-25-63-S+	Mini-Circuits	FM14101424	06, 27, 2017
☒	SIGNAL GENERATOR	SMB100A	Rohde & Schwarz	177586	08, 08, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	EMS Test S/W	KTI_RS2012	KOREA TECHNOLOGY INSTITUTE CO., LTD	2.1.1	-



Test Conditions

Temperature: 18,9 °C
Relative Humidity: 52,4 %
Atmospheric Pressure: 99,4 kPa

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied



Test Data

- AC 24 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- DC 12 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Dec, 21, 2016

Test Location

EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Capacitive Coupling Clamp	HFK	EM TEST	070925	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 19,9 °C
Relative Humidity: 39,7 %
Atmospheric Pressure: 100,7 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC,DC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

- AC 24 V Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied



- PoE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Dec, 21, 2016

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☐	CDN	CNV 504N	EM TEST	V0936105121	06, 27, 2017
☐	CDN	CNV 508T5	EM TEST	P1549168422	04, 27, 2017
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 19,9 °C
Relative Humidity: 39,7 %
Atmospheric Pressure: 100,7 kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Test Data

- AC 24 V Mode

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

- DC 12 V Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1-PE	Complied	Complied
L2-PE	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied



- POE Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1-PE	-	-
L2-PE	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Dec, 21, 2016

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	08, 08, 2017
☒	6 dB Attenuator	ATT6	EM TEST	1208-34	08, 08, 2017
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 08, 2017
☐	CDN	CDN-T2-RJ11	EM TEST	0909-07	08, 08, 2017
☐	CDN	CDN-T4	EM TEST	0909-08	08, 08, 2017
☐	CDN	CDN-T8RJ45	EM TEST	0909-09	08, 08, 2017
☐	CDN	CDN-AF2	EM TEST	0909-10	08, 08, 2017
☐	CDN	CDN-AF4	EM TEST	0909-11	08, 08, 2017
☒	EM Injection Clamp	EM 101	Liithi	35943	02, 04, 2017
☒	EMS Test S/W	icd.control	EM TEST AG	5.3.7	-

Test Conditions

Temperature: 19,9 °C
Relative Humidity: 39,7 %
Atmospheric Pressure: 100,7 kPa



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (38) of (99)

Test Specifications

Frequency range:

☒ 150 kHz to 100 MHz

☐ 150 kHz to 80 MHz

Voltage Level:

☐ 1 Vrms

☐ 3 Vrms

☒ 10 Vrms

Modulation:

☒ AM, 80 %, 1 kHz sine wave

☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:

☒ 1 % step

Dwell Time:

☒ 1 s

☐ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- AC 24 V Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN (☒ M2, ☐ M3)	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	Complied	Complied
Alarm	Complied	Complied

- DC 12 V Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 – L2	CDN (☒ M2, ☐ M3)	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	Complied	Complied
Alarm	Complied	Complied



- PoE Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	Complied	Complied
Alarm	Complied	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Dec, 21, 2016

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 19,9 °C
Relative Humidity: 39,7 %
Atmospheric Pressure: 100,7 kPa



Test Specifications & Observations/Remarks

- AC 24 V Mode

(Test Voltage : 50 Hz)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 /5000	<u>Complied</u>
☒ 30 % dip	☒ 25 /500	<u>Complied</u>
☒ 60 % dip	☒ 10 /200	<u>Complied</u>
☒ 100 % dip	☒ 250 /5000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 243 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria
- ☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:

Conducted Emission

Model No.:


XNV-8080RP

Mode

AC 24V

Operator Name:

KES

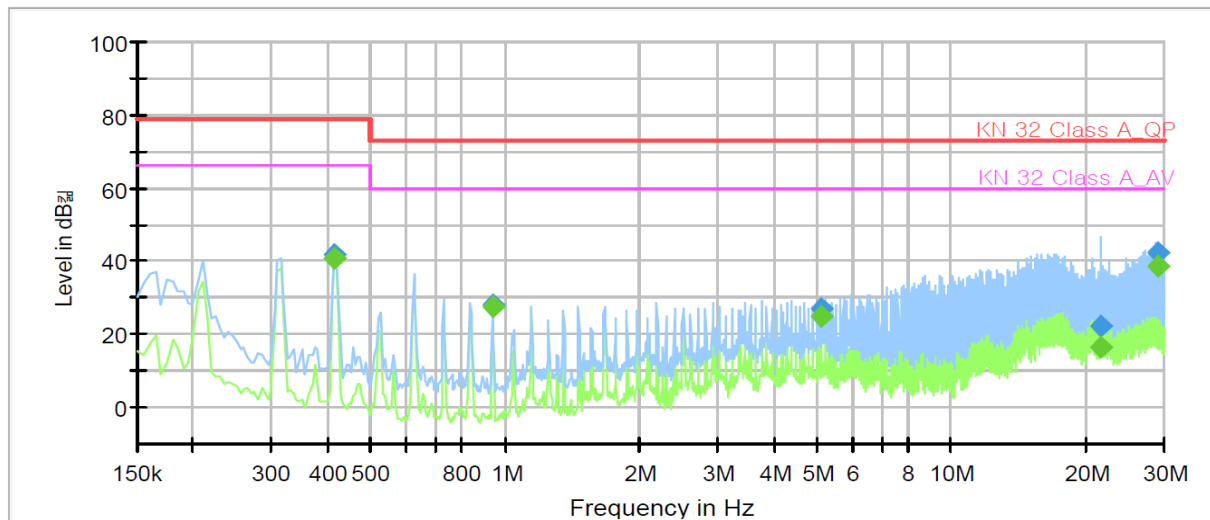

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.415000	---	40.94	66.00	25.06	1000.0	9.000	L1	9.8
0.415000	41.61	---	79.00	37.39	1000.0	9.000	L1	9.8
0.940000	---	27.48	60.00	32.52	1000.0	9.000	L1	10.0
0.940000	28.19	---	73.00	44.81	1000.0	9.000	L1	10.0
5.110000	---	24.83	60.00	35.17	1000.0	9.000	L1	10.0
5.110000	27.13	---	73.00	45.87	1000.0	9.000	L1	10.0
21.715000	---	16.35	60.00	43.65	1000.0	9.000	L1	10.3
21.715000	22.31	---	73.00	50.69	1000.0	9.000	L1	10.3
28.885000	---	38.50	60.00	21.50	1000.0	9.000	L1	10.4
28.885000	42.52	---	73.00	30.48	1000.0	9.000	L1	10.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-8080RP
Mode	AC 24V
Operator Name:	KES

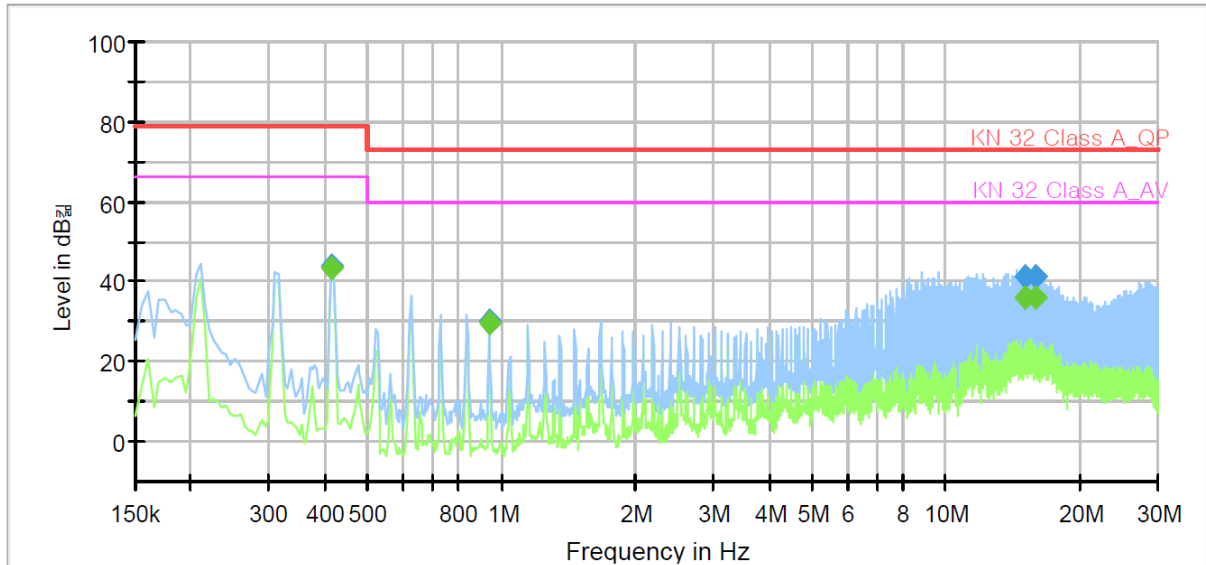

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.415000	---	43.37	66.00	22.63	1000.0	9.000	N	9.8
0.415000	43.97	---	79.00	35.03	1000.0	9.000	N	9.8
0.940000	---	29.76	60.00	30.24	1000.0	9.000	N	10.0
0.940000	30.40	---	73.00	42.60	1000.0	9.000	N	10.0
15.125000	---	36.03	60.00	23.97	1000.0	9.000	N	10.1
15.125000	41.22	---	73.00	31.78	1000.0	9.000	N	10.1
15.855000	---	36.04	60.00	23.96	1000.0	9.000	N	10.2
15.855000	41.41	---	73.00	31.59	1000.0	9.000	N	10.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)




Conducted Emissions at Telecommunication Ports

- AC 24 V Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-8080RP
Mode: AC 24V_10M
Operator Name: KES

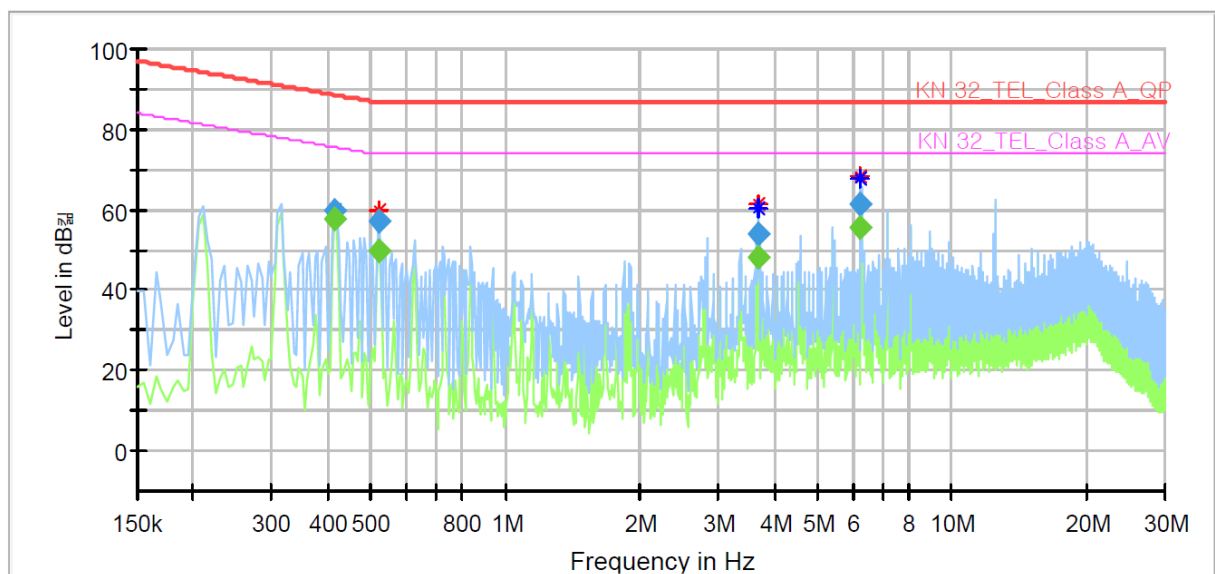

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.415000	---	57.88	75.55	17.67	1000.0	9.000	Single Line	10.1
0.415000	59.82	---	88.55	28.73	1000.0	9.000	Single Line	10.1
0.520000	---	49.89	74.00	24.11	1000.0	9.000	Single Line	10.1
0.520000	57.11	---	87.00	29.89	1000.0	9.000	Single Line	10.1
3.695000	---	47.96	74.00	26.04	1000.0	9.000	Single Line	10.2
3.695000	54.10	---	87.00	32.90	1000.0	9.000	Single Line	10.2
6.250000	---	55.46	74.00	18.54	1000.0	9.000	Single Line	10.1
6.250000	61.32	---	87.00	25.68	1000.0	9.000	Single Line	10.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)



[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-8080RP
Mode: AC 24V_100M
Operator Name: KES

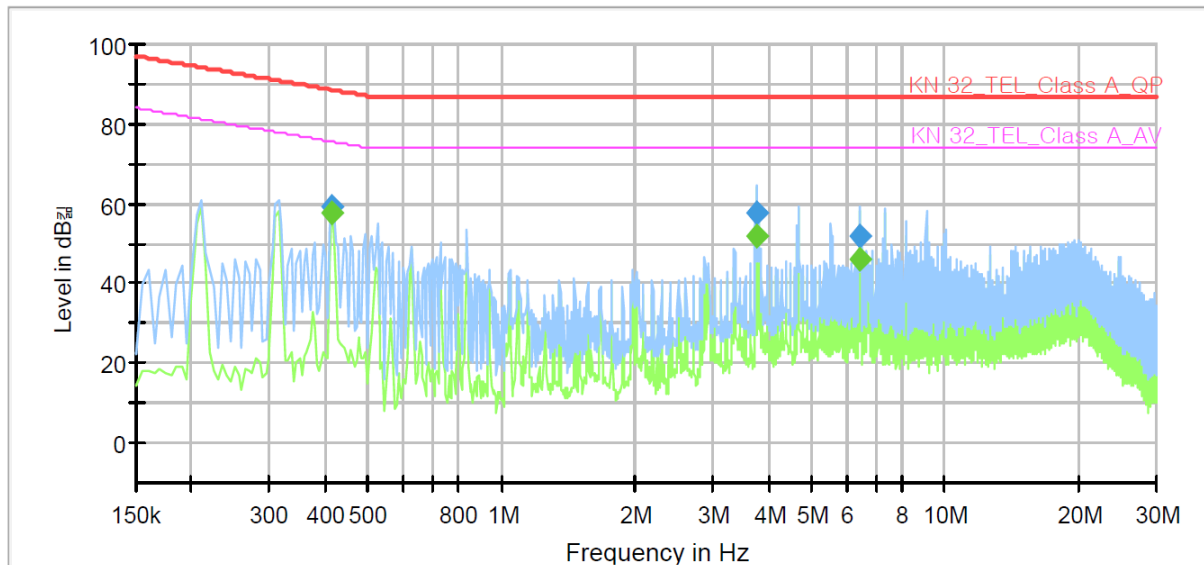

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.415000	---	57.43	75.55	18.12	1000.0	9.000	Single Line	9.6
0.415000	59.29	---	88.55	29.26	1000.0	9.000	Single Line	9.6
3.750000	---	52.00	74.00	22.00	1000.0	9.000	Single Line	9.7
3.750000	57.65	---	87.00	29.35	1000.0	9.000	Single Line	9.7
6.415000	---	45.84	74.00	28.16	1000.0	9.000	Single Line	9.5
6.415000	51.98	---	87.00	35.02	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)




- DC 12 V Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-8080RP
Mode: DC 12V_10M
Operator Name: KES

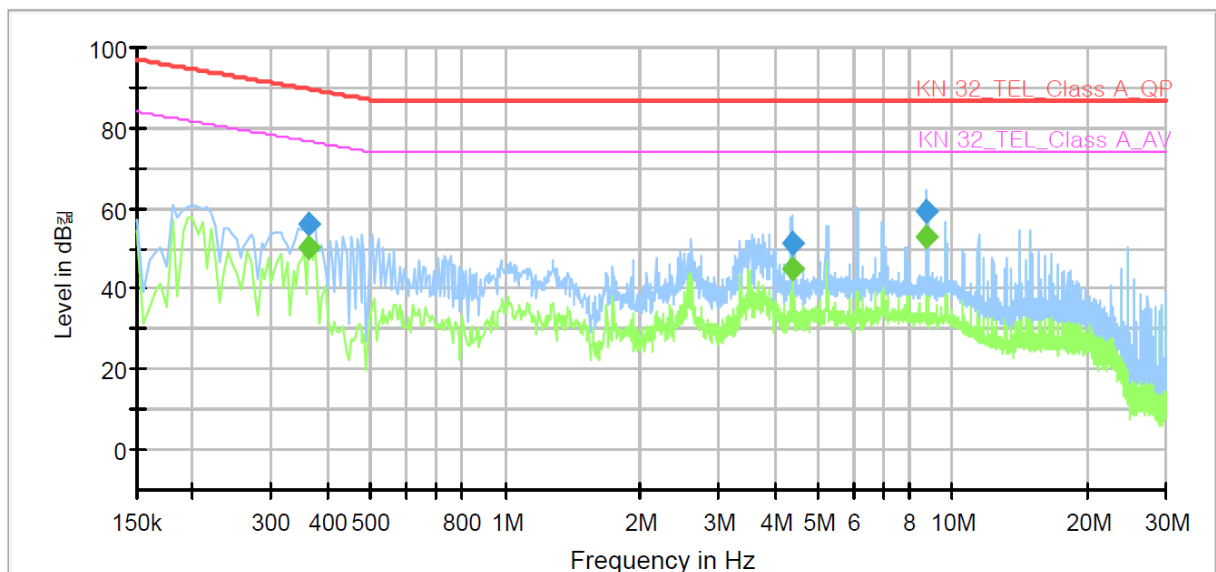

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.365000	---	50.24	76.61	26.37	1000.0	9.000	Single Line	10.1
0.365000	56.19	---	89.61	33.42	1000.0	9.000	Single Line	10.1
4.400000	---	44.94	74.00	29.06	1000.0	9.000	Single Line	10.1
4.400000	51.27	---	87.00	35.73	1000.0	9.000	Single Line	10.1
8.750000	---	53.11	74.00	20.89	1000.0	9.000	Single Line	10.0
8.750000	59.26	---	87.00	27.74	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)



[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-8080RP
Mode: DC 12V_100M
Operator Name: KES

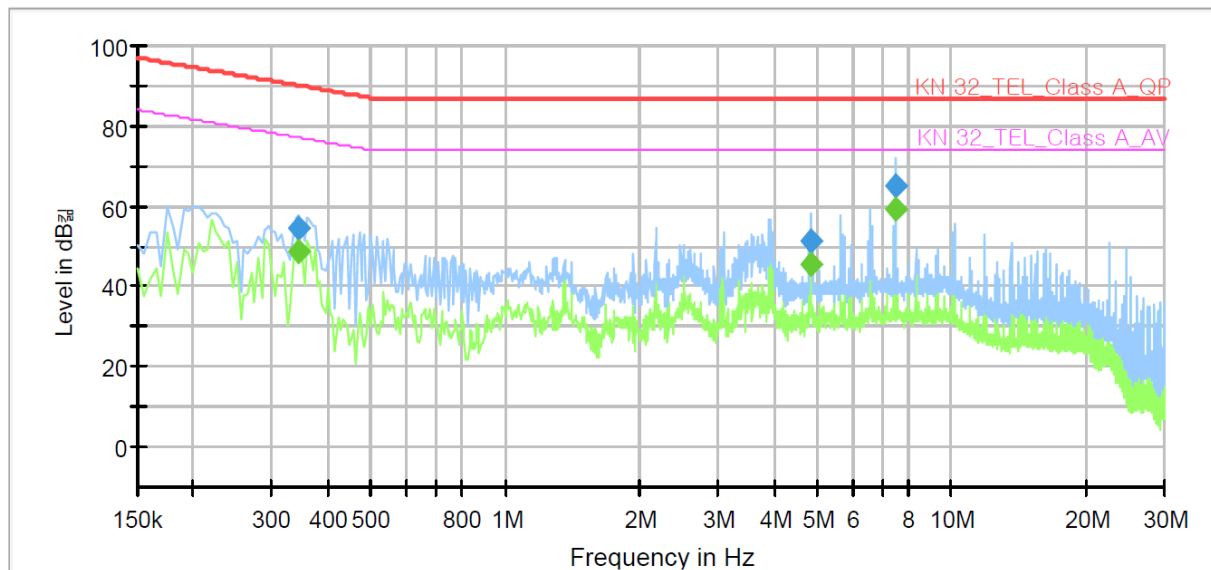

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.345000	---	48.83	77.08	28.25	1000.0	9.000	Single Line	9.6
0.345000	54.46	---	90.08	35.62	1000.0	9.000	Single Line	9.6
4.835000	---	45.65	74.00	28.35	1000.0	9.000	Single Line	9.6
4.835000	51.26	---	87.00	35.74	1000.0	9.000	Single Line	9.6
7.500000	---	59.23	74.00	14.77	1000.0	9.000	Single Line	9.5
7.500000	65.19	---	87.00	21.81	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)




- PoE Mode

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-8080RP
Mode: POE_10M
Operator Name: KES

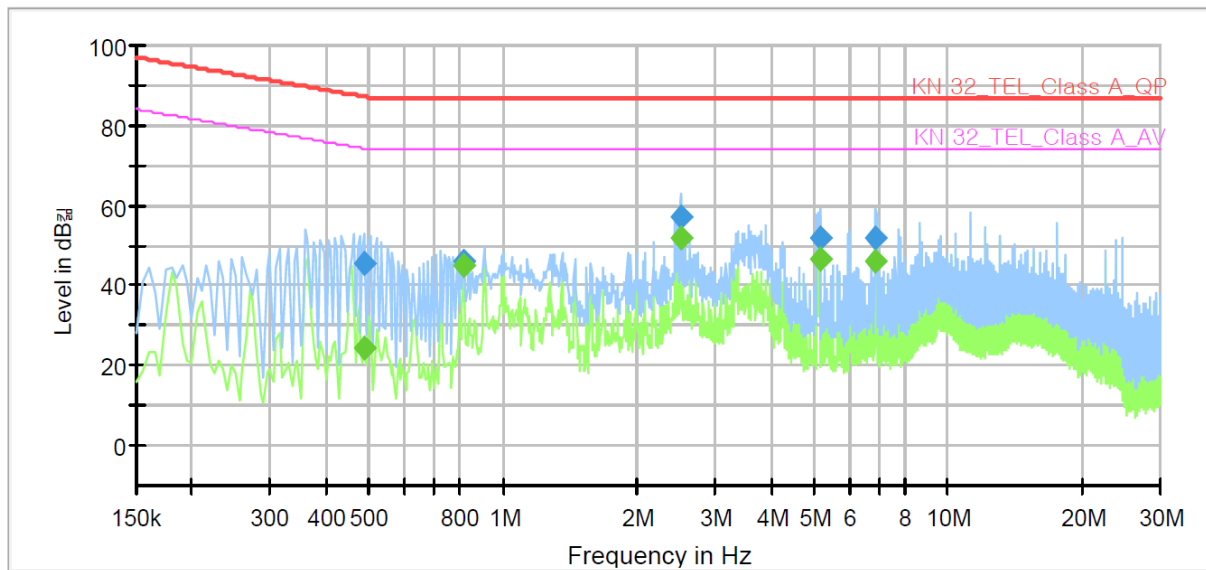

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.490000	---	24.62	74.17	49.55	1000.0	9.000	Single Line	10.1
0.490000	45.41	---	87.17	41.76	1000.0	9.000	Single Line	10.1
0.815000	---	45.19	74.00	28.81	1000.0	9.000	Single Line	10.2
0.815000	45.83	---	87.00	41.17	1000.0	9.000	Single Line	10.2
2.500000	---	51.70	74.00	22.30	1000.0	9.000	Single Line	10.2
2.500000	57.25	---	87.00	29.75	1000.0	9.000	Single Line	10.2
5.165000	---	46.85	74.00	27.15	1000.0	9.000	Single Line	10.1
5.165000	51.65	---	87.00	35.35	1000.0	9.000	Single Line	10.1
6.900000	---	46.09	74.00	27.91	1000.0	9.000	Single Line	10.0
6.900000	51.79	---	87.00	35.21	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNV-8080RP
Mode: POE_100M
Operator Name: KES

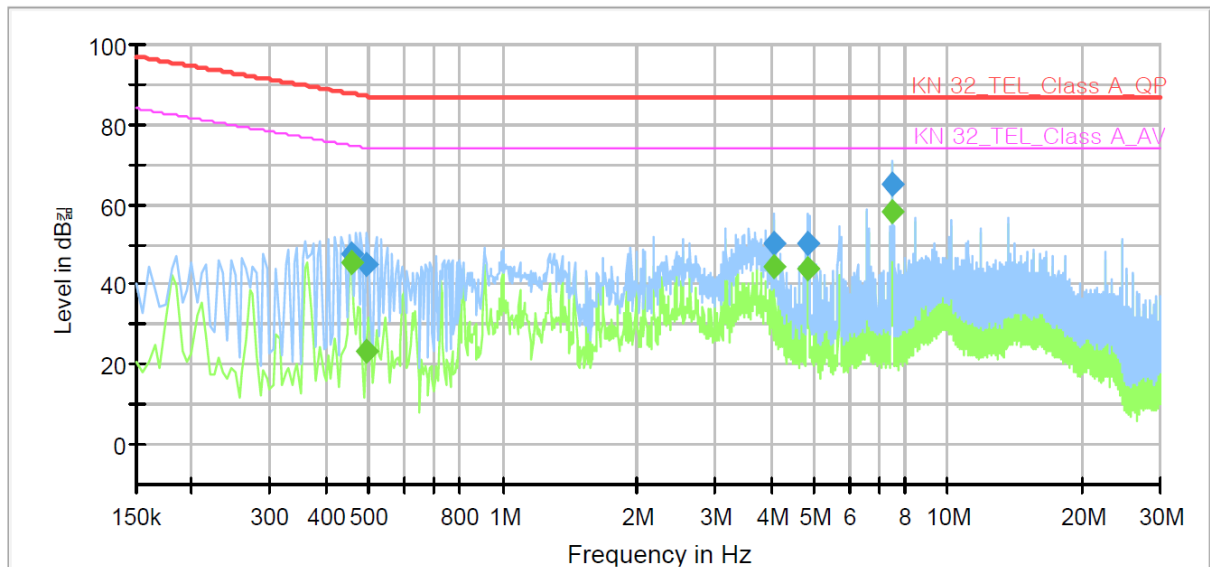

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	45.76	74.78	29.02	1000.0	9.000	Single Line	9.6
0.455000	47.60	---	87.78	40.18	1000.0	9.000	Single Line	9.6
0.495000	---	23.21	74.08	50.87	1000.0	9.000	Single Line	9.6
0.495000	45.05	---	87.08	42.03	1000.0	9.000	Single Line	9.6
4.075000	---	44.54	74.00	29.46	1000.0	9.000	Single Line	9.6
4.075000	50.46	---	87.00	36.54	1000.0	9.000	Single Line	9.6
4.835000	---	44.13	74.00	29.87	1000.0	9.000	Single Line	9.6
4.835000	50.13	---	87.00	36.87	1000.0	9.000	Single Line	9.6
7.500000	---	58.26	74.00	15.74	1000.0	9.000	Single Line	9.5
7.500000	65.06	---	87.00	21.94	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)



Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
122.87	14.87	H	1.02	9.41	3.20	27.48	40.00	12.52
148.26	11.25	V	1.33	8.14	3.55	22.94	40.00	17.06
172.49	13.25	H	3.02	9.09	3.83	26.17	40.00	13.83
196.80	10.90	V	1.54	11.00	4.08	25.98	40.00	14.02
230.73	14.55	H	2.96	11.98	4.49	31.02	47.00	15.98
230.76	11.31	V	3.01	11.98	4.49	27.78	47.00	19.22
350.96	10.69	H	1.28	14.56	5.65	30.90	47.00	16.10
350.97	12.25	V	2.00	14.56	5.65	32.46	47.00	14.54

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (52) of (99)

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
122.90	14.44	H	1.63	9.40	3.20	27.04	40.00	12.96
172.43	12.33	H	3.01	9.09	3.83	25.25	40.00	14.75
172.53	10.23	V	2.22	9.09	3.83	23.15	40.00	16.85
243.35	12.93	V	1.58	12.26	4.64	29.83	47.00	17.17
270.49	12.08	H	2.31	12.81	4.90	29.79	47.00	17.21
297.67	11.21	V	1.26	13.33	5.13	29.67	47.00	17.33
324.77	10.39	V	3.01	13.95	5.39	29.73	47.00	17.27
351.04	11.90	H	1.99	14.56	5.65	32.11	47.00	14.89

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBμV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (53) of (99)

- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dBμV]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
122.88	15.06	V	1.09	9.41	3.20	27.67	40.00	12.33
172.53	11.36	V	2.97	9.09	3.83	24.28	40.00	15.72
172.53	10.97	H	2.01	9.09	3.83	23.89	40.00	16.11
221.93	10.31	V	1.90	11.79	4.38	26.48	40.00	13.52
270.47	10.33	H	3.00	12.81	4.90	28.04	47.00	18.96
320.02	11.96	H	2.35	13.84	5.35	31.15	47.00	15.85
350.94	10.06	V	3.01	14.56	5.65	30.27	47.00	16.73
400.47	12.36	H	1.28	15.71	6.18	34.25	47.00	12.75

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBμV] = Amplitude[dBμV] + Correction Factor [dB]


Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

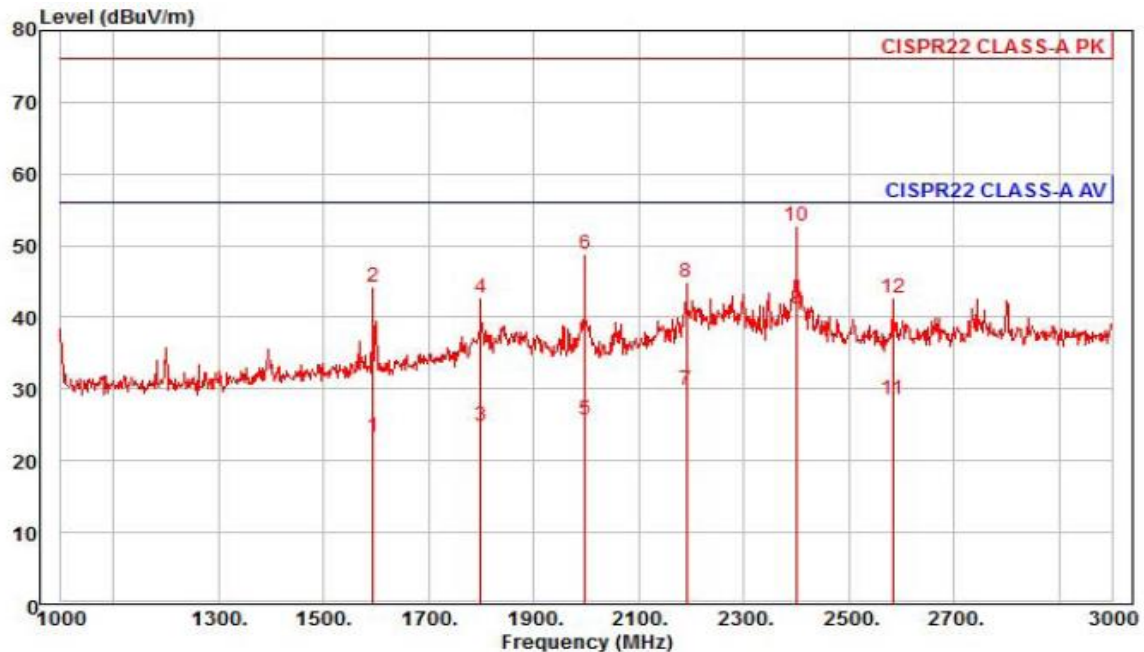

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1594.00	27.95	26.27	8.29	39.22	337	56.00	-32.71	horizontal	Average
2	1594.00	48.84	26.27	8.29	39.22	337	76.00	-31.82	horizontal	Peak
3	1800.00	28.21	27.09	8.83	39.32	242	56.00	-31.19	horizontal	Average
4	1800.00	46.23	27.09	8.83	39.32	242	76.00	-33.17	horizontal	Peak
5	1998.00	27.91	27.87	9.33	39.41	271	56.00	-30.30	horizontal	Average
6	1998.00	51.10	27.87	9.33	39.41	271	76.00	-27.11	horizontal	Peak
7	2190.00	31.08	28.35	9.78	39.41	29	56.00	-26.20	horizontal	Average
8	2190.00	46.19	28.35	9.78	39.41	29	76.00	-31.09	horizontal	Peak
9 pp	2400.00	41.51	28.86	10.32	39.42	49	56.00	-14.73	horizontal	Average
10 pk	2400.00	52.92	28.86	10.32	39.42	49	76.00	-23.32	horizontal	Peak
11	2584.00	28.16	29.31	10.71	39.63	308	56.00	-27.45	horizontal	Average
12	2584.00	42.35	29.31	10.71	39.63	308	76.00	-33.26	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (55) of (99)

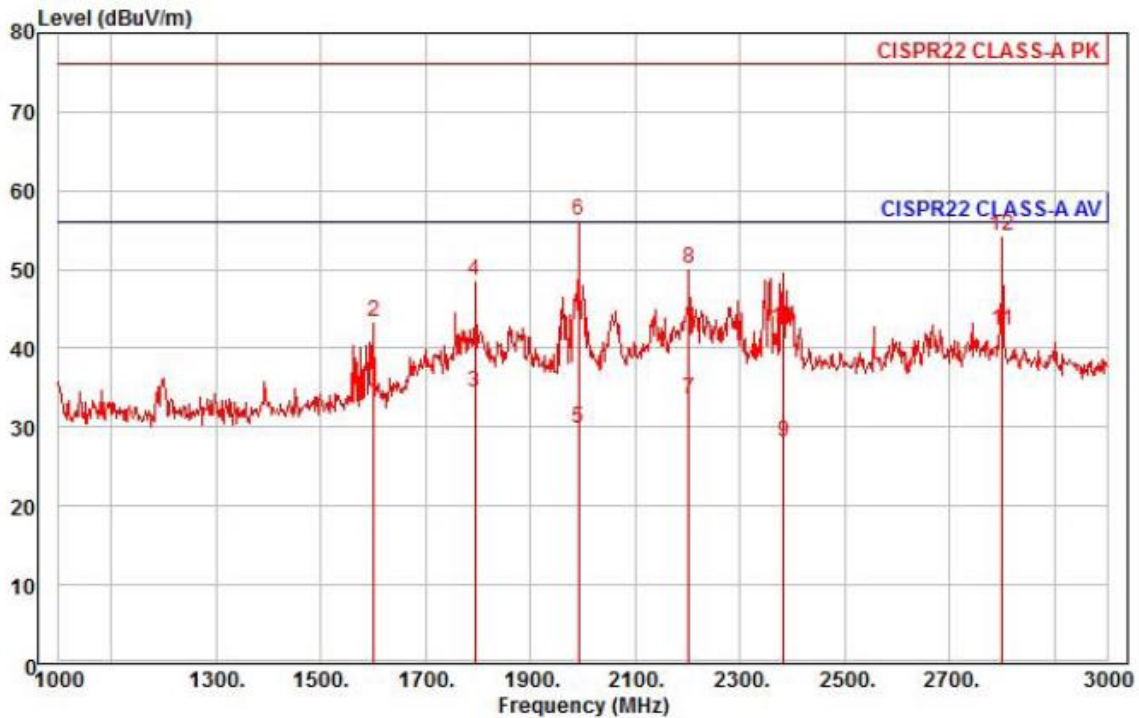

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1600.00	37.84	26.29	8.31	39.22	265	56.00	-22.78	vertical	Average
2	1600.00	48.09	26.29	8.31	39.22	265	76.00	-32.53	vertical	Peak
3	1794.00	37.95	27.06	8.81	39.31	122	56.00	-21.49	vertical	Average
4	1794.00	52.07	27.06	8.81	39.31	122	76.00	-27.37	vertical	Peak
5	1992.00	32.02	27.85	9.32	39.41	336	56.00	-26.22	vertical	Average
6 pk	1992.00	58.55	27.85	9.32	39.41	336	76.00	-19.69	vertical	Peak
7	2202.00	34.72	28.37	9.81	39.42	13	56.00	-22.52	vertical	Average
8	2202.00	51.40	28.37	9.81	39.42	13	76.00	-25.84	vertical	Peak
9	2384.00	28.40	28.82	10.28	39.42	102	56.00	-27.92	vertical	Average
10	2384.00	42.78	28.82	10.28	39.42	102	76.00	-33.54	vertical	Peak
11 pp	2800.00	41.17	29.84	11.23	39.88	311	56.00	-13.64	vertical	Average
12	2800.00	53.14	29.84	11.23	39.88	311	76.00	-21.67	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0006-R1

Page (56) of (99)

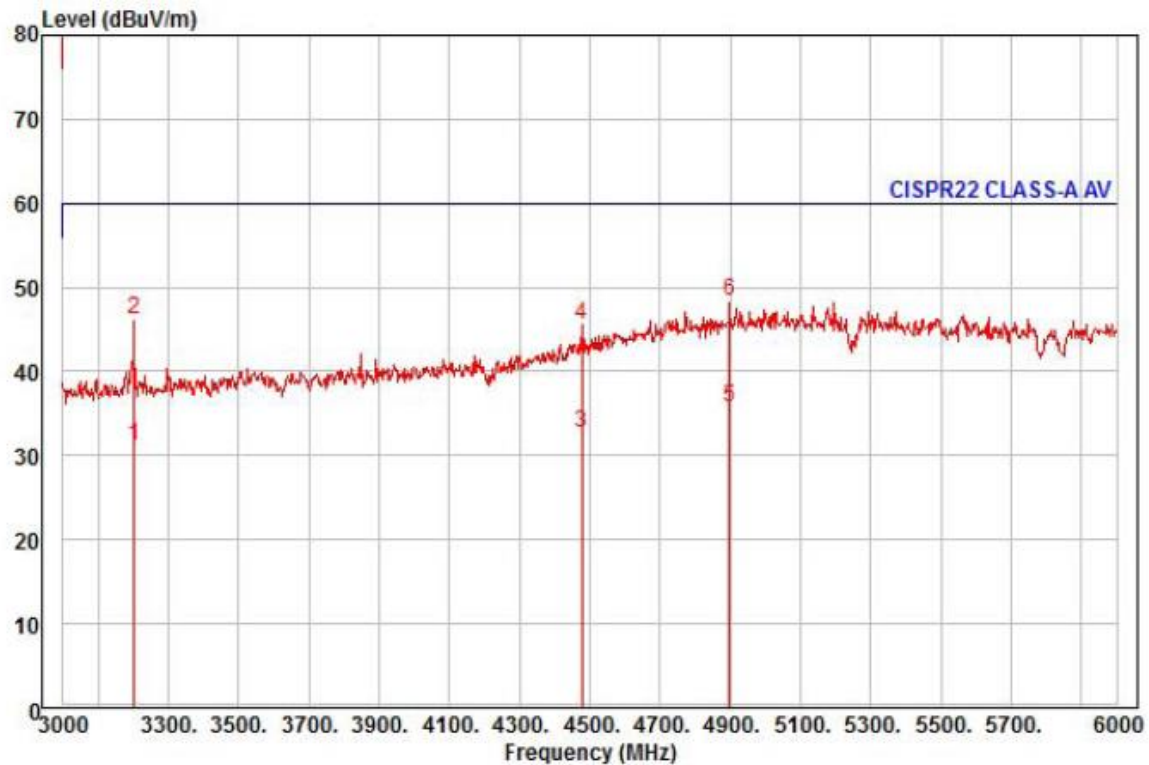

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3201.00	28.89	30.67	12.06	40.42	285	60.00	-28.80	horizontal	Average
2	3201.00	43.85	30.67	12.06	40.42	285	80.00	-33.84	horizontal	Peak
3	4479.00	24.20	34.75	14.42	40.77	190	60.00	-27.40	horizontal	Average
4	4479.00	37.21	34.75	14.42	40.77	190	80.00	-34.39	horizontal	Peak
5 pp	4899.00	23.68	37.14	15.21	40.37	33	60.00	-24.34	horizontal	Average
6 pk	4899.00	36.48	37.14	15.21	40.37	33	80.00	-31.54	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

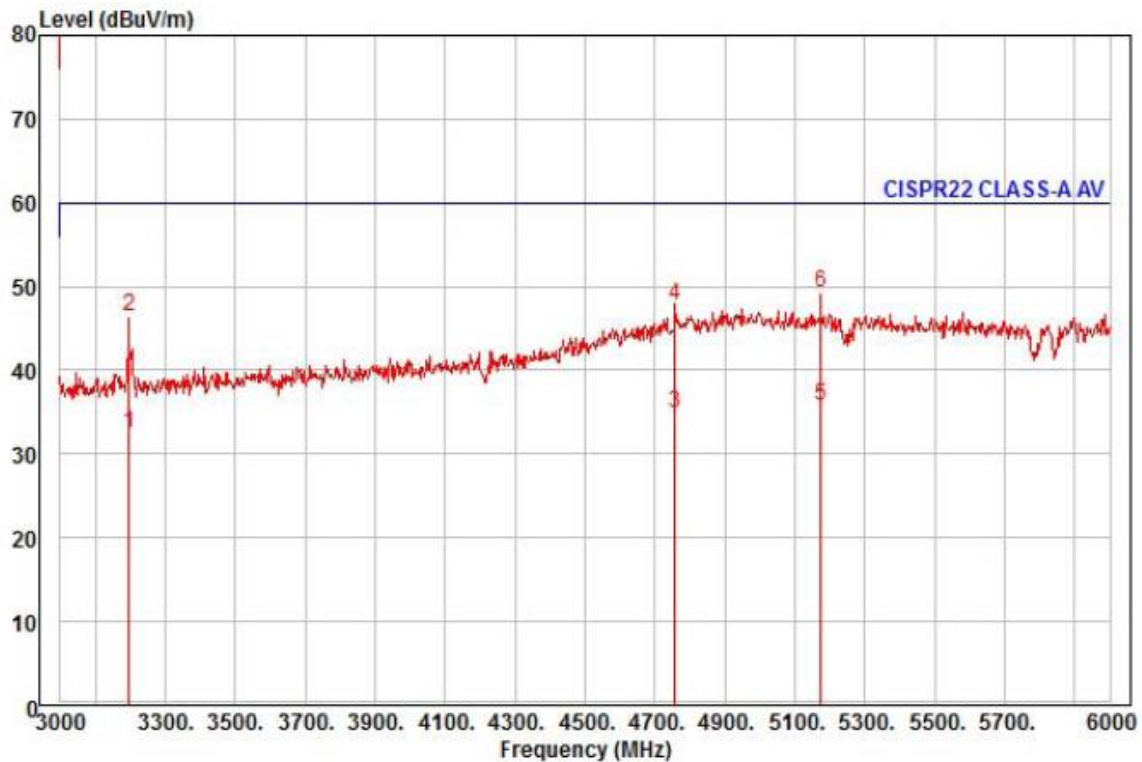

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	30.10	30.66	12.05	40.41	9	60.00	-27.60	vertical	Average
2	3198.00	44.10	30.66	12.05	40.41	9	80.00	-33.60	vertical	Peak
3	4758.00	24.07	36.34	15.01	40.51	302	60.00	-25.09	vertical	Average
4	4758.00	36.82	36.34	15.01	40.51	302	80.00	-32.34	vertical	Peak
5 pp	5175.00	23.29	37.37	15.66	40.56	173	60.00	-24.24	vertical	Average
6 pk	5175.00	36.84	37.37	15.66	40.56	173	80.00	-30.69	vertical	Peak


◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor



- DC 12 V Mode

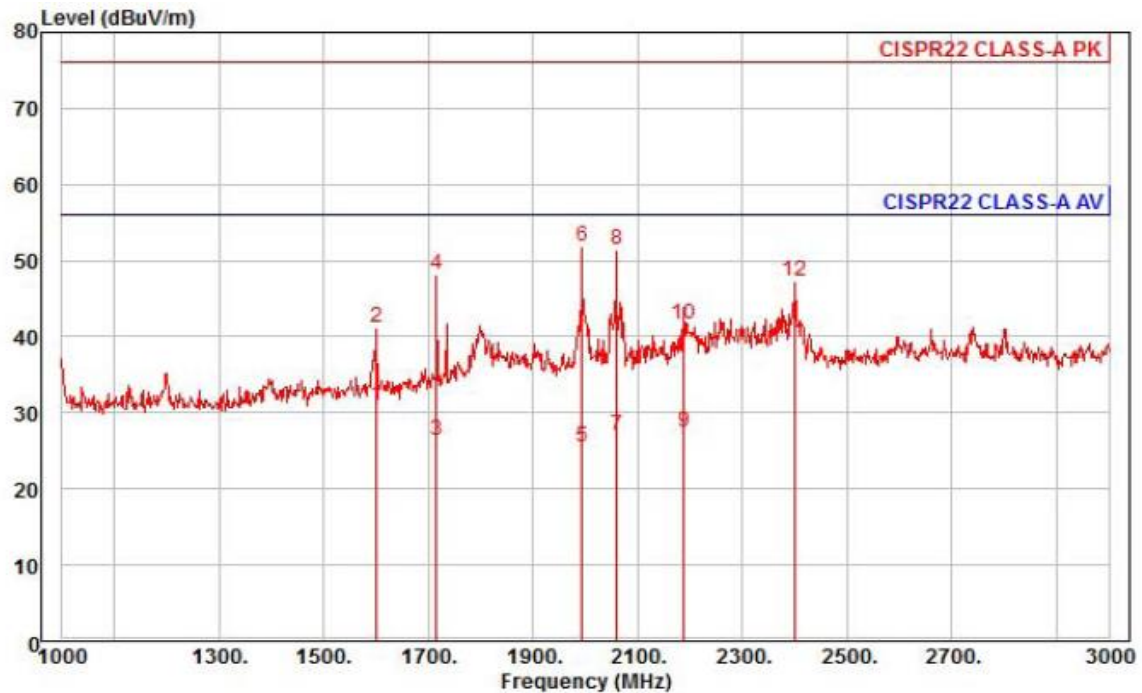


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : DC 12V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1600.00	35.58	26.29	8.31	39.22	15	56.00	-25.04	horizontal	Average
2	1600.00	45.91	26.29	8.31	39.22	15	76.00	-34.71	horizontal	Peak
3	1716.00	30.30	26.75	8.61	39.28	265	56.00	-29.62	horizontal	Average
4	1716.00	52.11	26.75	8.61	39.28	265	76.00	-27.81	horizontal	Peak
5	1994.00	27.76	27.86	9.32	39.41	176	56.00	-30.47	horizontal	Average
6 pk	1994.00	54.01	27.86	9.32	39.41	176	76.00	-24.22	horizontal	Peak
7	2060.00	28.89	28.03	9.48	39.41	329	56.00	-29.01	horizontal	Average
8	2060.00	53.42	28.03	9.48	39.41	329	76.00	-24.48	horizontal	Peak
9	2188.00	28.75	28.34	9.77	39.41	37	56.00	-28.55	horizontal	Average
10	2188.00	42.92	28.34	9.77	39.41	37	76.00	-34.38	horizontal	Peak
11 pp	2400.00	39.40	28.86	10.32	39.42	37	56.00	-16.84	horizontal	Average
12	2400.00	47.49	28.86	10.32	39.42	37	76.00	-28.75	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

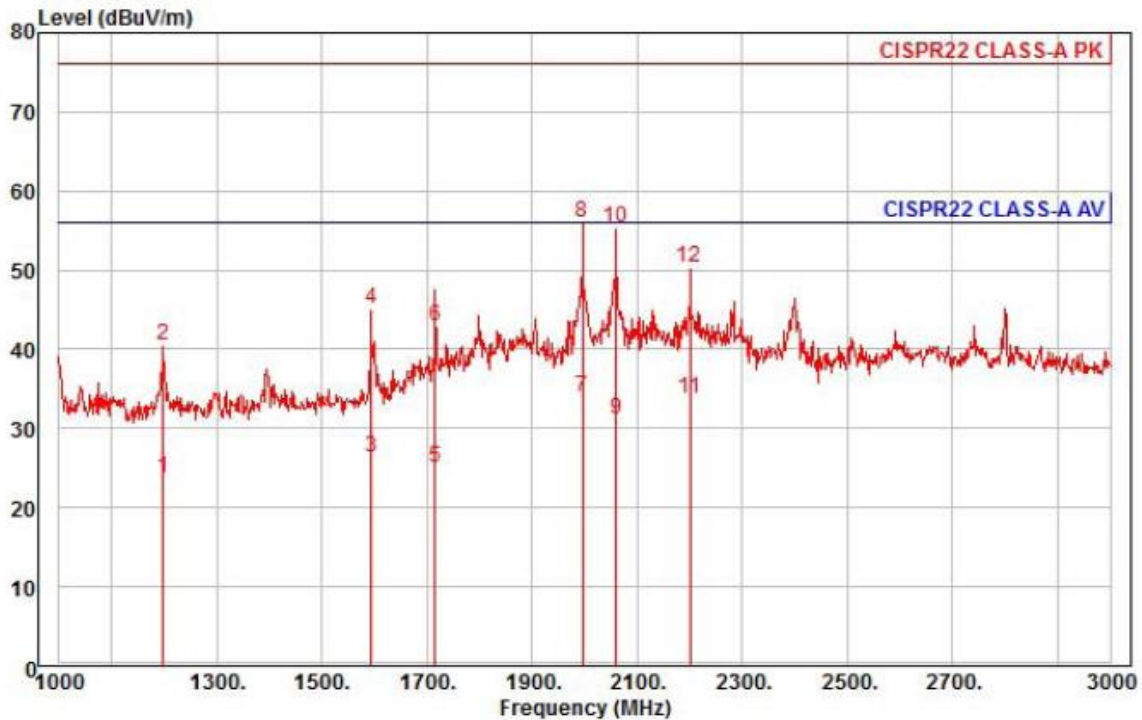


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : DC 12V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1198.00	31.51	24.70	7.13	39.61	130	56.00	-32.27	vertical	Average
2	1198.00	48.43	24.70	7.13	39.61	130	76.00	-35.35	vertical	Peak
3	1594.00	31.14	26.27	8.29	39.22	328	56.00	-29.52	vertical	Average
4	1594.00	49.69	26.27	8.29	39.22	328	76.00	-30.97	vertical	Peak
5	1716.00	28.99	26.75	8.61	39.28	234	56.00	-30.93	vertical	Average
6	1716.00	46.92	26.75	8.61	39.28	234	76.00	-33.00	vertical	Peak
7 av	1996.00	36.17	27.86	9.33	39.41	2	56.00	-22.05	vertical	Average
8 pp	1996.00	58.29	27.86	9.33	39.41	2	76.00	-19.93	vertical	Peak
9	2060.00	33.06	28.03	9.48	39.41	328	56.00	-24.84	vertical	Average
10	2060.00	57.30	28.03	9.48	39.41	328	76.00	-20.60	vertical	Peak
11	2200.00	35.14	28.37	9.80	39.42	165	56.00	-22.11	vertical	Average
12	2200.00	51.62	28.37	9.80	39.42	165	76.00	-25.63	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

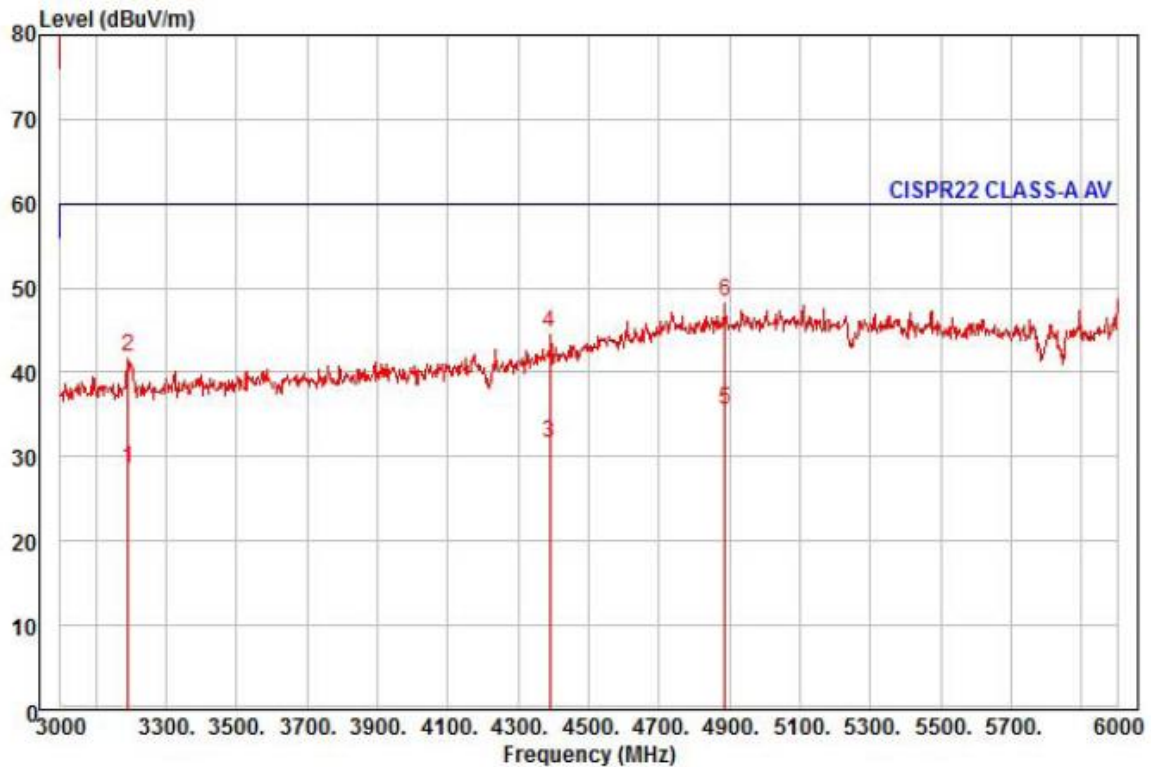

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : DC 12V
Memo : 3 ~ 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3192.00	26.26	30.65	12.04	40.41	149	60.00	-31.46	horizontal	Average
2	3192.00	39.64	30.65	12.04	40.41	149	80.00	-38.08	horizontal	Peak
3	4389.00	23.83	34.23	14.25	40.75	200	60.00	-28.44	horizontal	Average
4	4389.00	36.98	34.23	14.25	40.75	200	80.00	-35.29	horizontal	Peak
5 pp	4887.00	23.68	37.07	15.19	40.38	175	60.00	-24.44	horizontal	Average
6 pk	4887.00	36.62	37.07	15.19	40.38	175	80.00	-31.50	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]) – Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

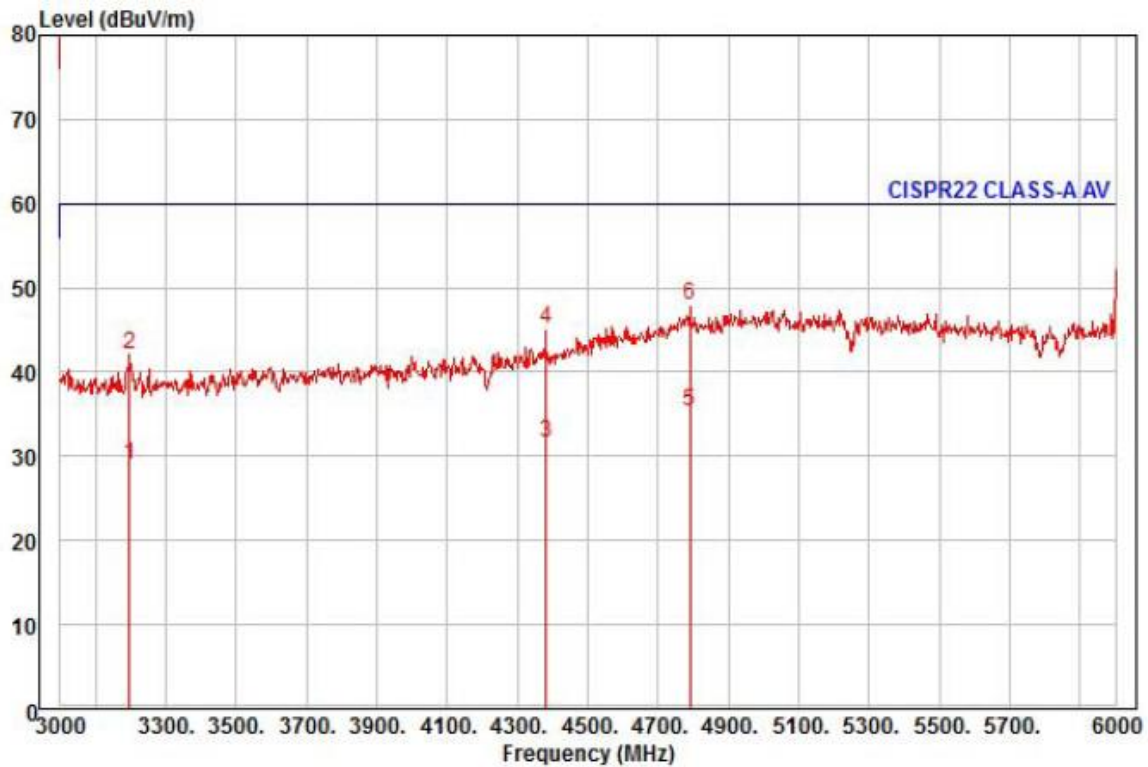

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : DC 12V
Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	26.72	30.66	12.05	40.41	300	60.00	-30.98 vertical	Average
2	3198.00	39.74	30.66	12.05	40.41	300	80.00	-37.96 vertical	Peak
3	4380.00	23.95	34.18	14.24	40.75	81	60.00	-28.38 vertical	Average
4	4380.00	37.43	34.18	14.24	40.75	81	80.00	-34.90 vertical	Peak
5 pp	4791.00	24.16	36.53	15.08	40.48	334	60.00	-24.71 vertical	Average
6 pk	4791.00	36.90	36.53	15.08	40.48	334	80.00	-31.97 vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

- PoE Mode

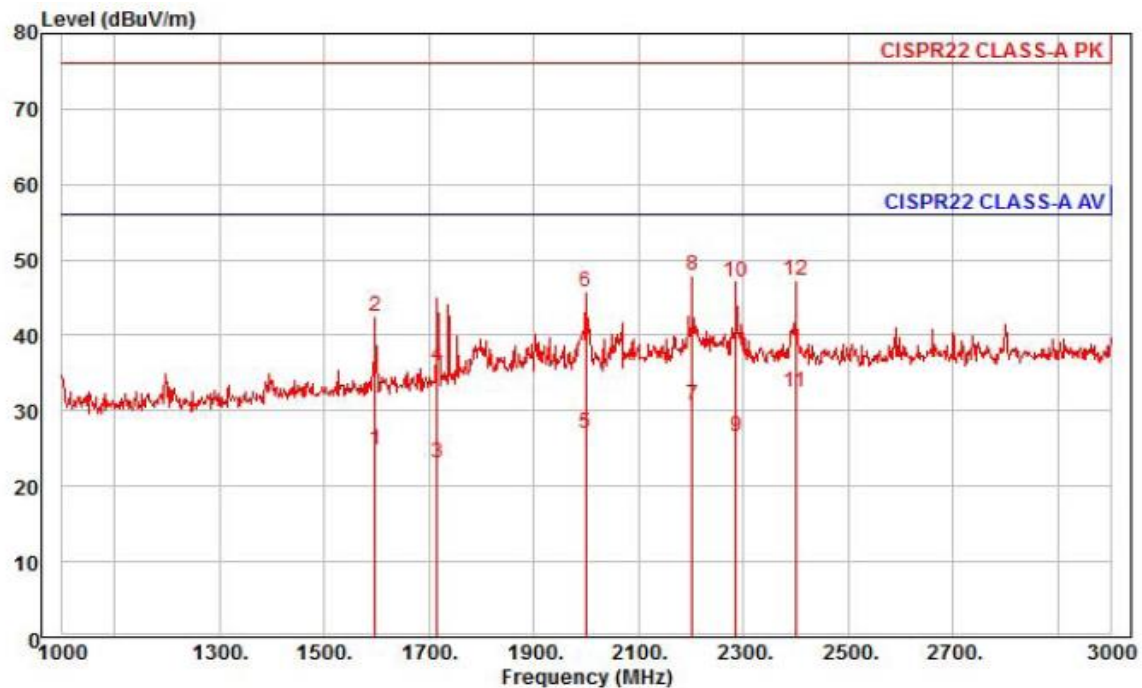


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : POE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1598.00	29.54	26.28	8.31	39.22	353	56.00	-31.09	horizontal	Average
2	1598.00	47.21	26.28	8.31	39.22	353	76.00	-33.42	horizontal	Peak
3	1716.00	27.13	26.75	8.61	39.28	228	56.00	-32.79	horizontal	Average
4	1716.00	39.90	26.75	8.61	39.28	228	76.00	-40.02	horizontal	Peak
5	2000.00	29.12	27.88	9.34	39.41	123	56.00	-29.07	horizontal	Average
6	2000.00	48.06	27.88	9.34	39.41	123	76.00	-30.13	horizontal	Peak
7	2202.00	32.05	28.37	9.81	39.42	40	56.00	-25.19	horizontal	Average
8 pk	2202.00	49.12	28.37	9.81	39.42	40	76.00	-28.12	horizontal	Peak
9	2286.00	27.49	28.58	10.03	39.42	347	56.00	-29.32	horizontal	Average
10	2286.00	47.99	28.58	10.03	39.42	347	76.00	-28.82	horizontal	Peak
11 pp	2400.00	32.78	28.86	10.32	39.42	299	56.00	-23.46	horizontal	Average
12	2400.00	47.49	28.86	10.32	39.42	299	76.00	-28.75	horizontal	Peak

♦ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

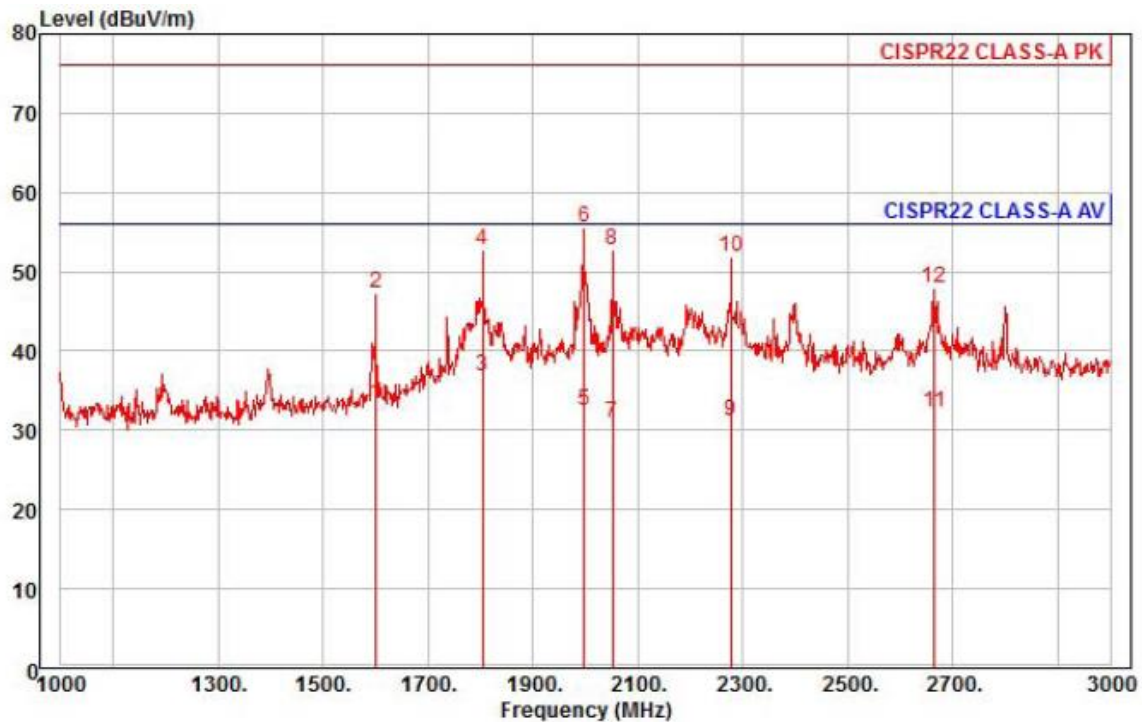


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : POE
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1600.00	37.96	26.29	8.31	39.22	337	56.00	-22.66	vertical	Average
2	1600.00	51.91	26.29	8.31	39.22	337	76.00	-28.71	vertical	Peak
3 pp	1804.00	40.21	27.10	8.84	39.32	123	56.00	-19.17	vertical	Average
4	1804.00	56.09	27.10	8.84	39.32	123	76.00	-23.29	vertical	Peak
5	1998.00	34.66	27.87	9.33	39.41	9	56.00	-23.55	vertical	Average
6 pk	1998.00	57.88	27.87	9.33	39.41	9	76.00	-20.33	vertical	Peak
7	2052.00	33.00	28.01	9.46	39.41	146	56.00	-24.94	vertical	Average
8	2052.00	54.60	28.01	9.46	39.41	146	76.00	-23.34	vertical	Peak
9	2278.00	31.96	28.56	10.00	39.42	359	56.00	-24.90	vertical	Average
10	2278.00	52.71	28.56	10.00	39.42	359	76.00	-24.15	vertical	Peak
11	2666.00	31.69	29.51	10.90	39.73	320	56.00	-23.63	vertical	Average
12	2666.00	47.29	29.51	10.90	39.73	320	76.00	-28.03	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

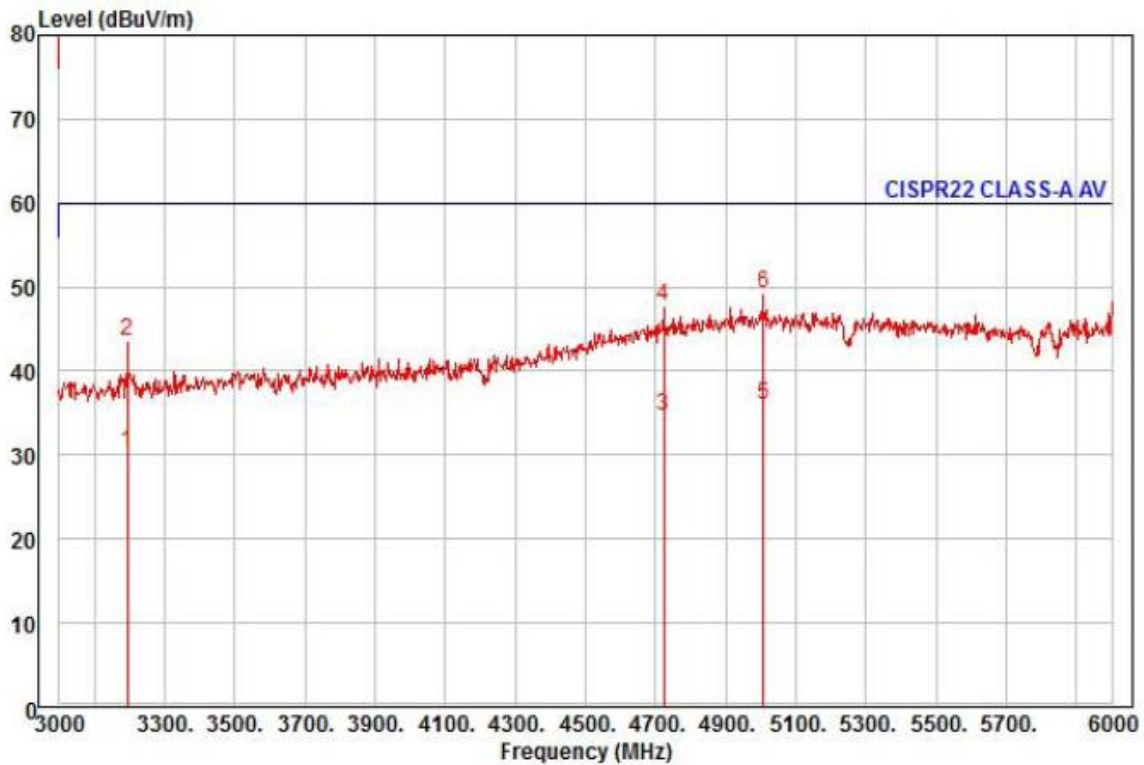


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : POE
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3195.00	28.07	30.66	12.05	40.41	0	60.00	-29.63	horizontal	Average
2	3195.00	41.30	30.66	12.05	40.41	0	80.00	-36.40	horizontal	Peak
3	4722.00	24.18	36.13	14.93	40.55	157	60.00	-25.31	horizontal	Average
4	4722.00	37.31	36.13	14.93	40.55	157	80.00	-32.18	horizontal	Peak
5 pp	5007.00	23.16	37.71	15.33	40.28	309	60.00	-24.08	horizontal	Average
6 pk	5007.00	36.52	37.71	15.33	40.28	309	80.00	-30.72	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

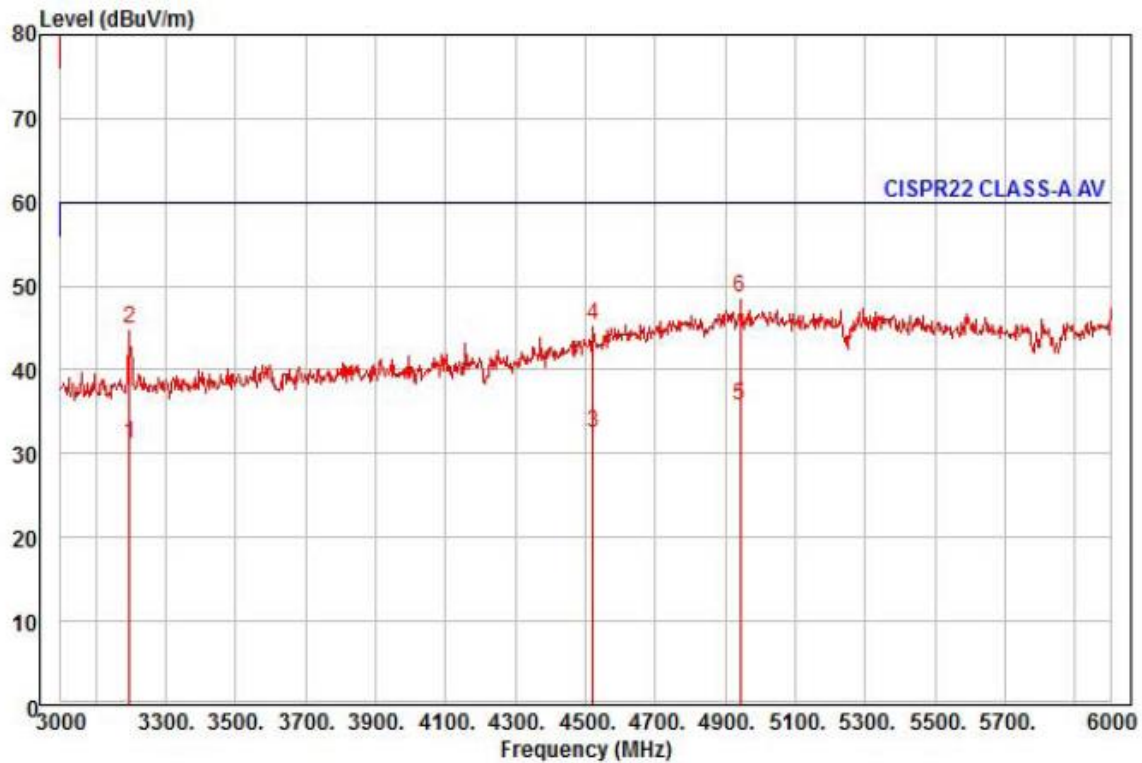


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8080RP
Mode : POE
Memo : 3 ~ 6 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	28.81	30.66	12.05	40.41	53	60.00	-28.89 vertical	Average
2	3198.00	42.61	30.66	12.05	40.41	53	80.00	-35.09 vertical	Peak
3	4521.00	23.82	34.98	14.50	40.75	292	60.00	-27.45 vertical	Average
4	4521.00	36.50	34.98	14.50	40.75	292	80.00	-34.77 vertical	Peak
5 pp	4941.00	23.36	37.38	15.25	40.33	139	60.00	-24.34 vertical	Average
6 pk	4941.00	36.41	37.38	15.25	40.33	139	80.00	-31.29 vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0006-R1
Page (68) of (99)

Test Data - Voltage Fluctuations**Maximum Flicker results**

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Setup Photos and Configuration

Conducted Voltage Emissions

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Telecommunication Emissions

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

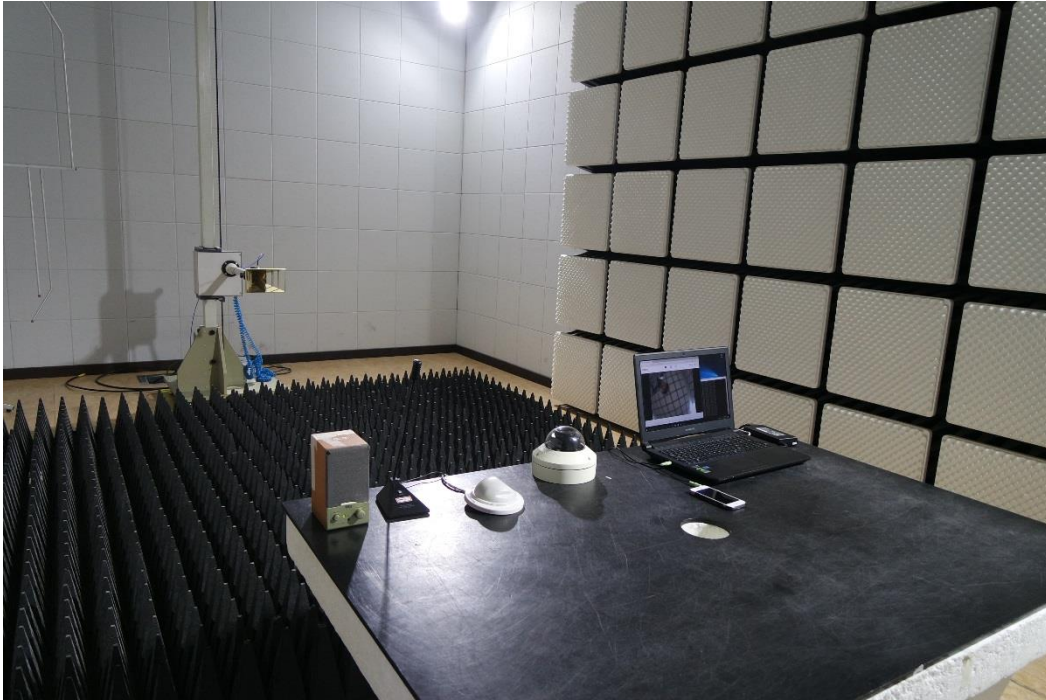

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC 12 V Mode

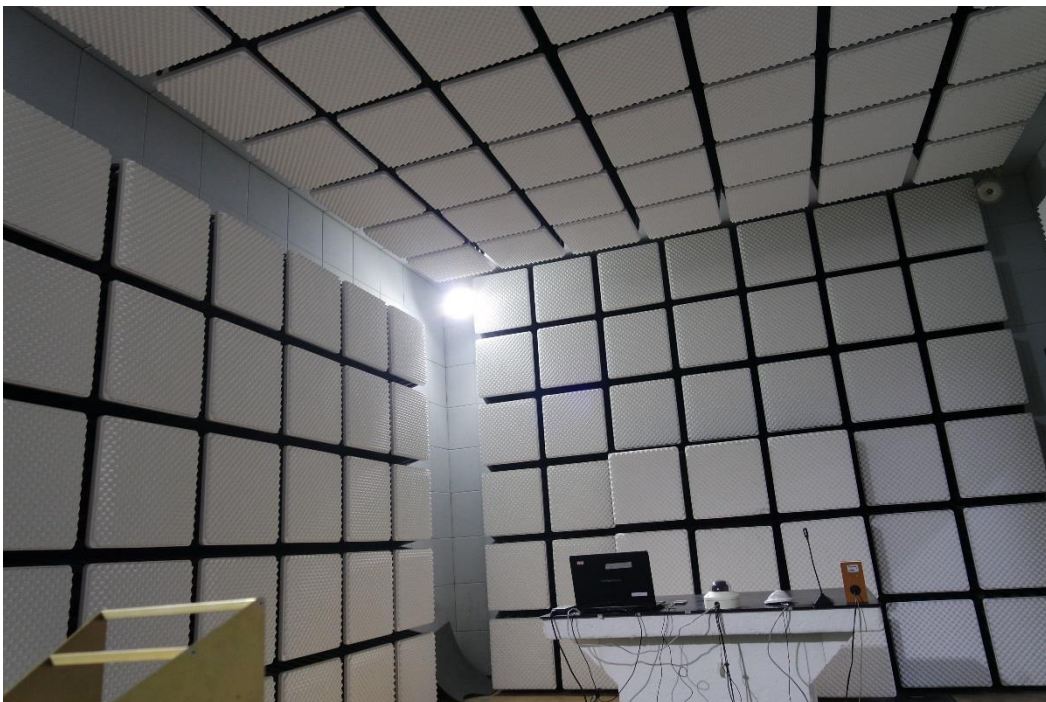

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0006-R1
Page (79) of (99)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrostatic Discharge

- AC 24 V Mode



- DC 12 V Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode




Radiated Electric Field Immunity

- AC 24 V Mode

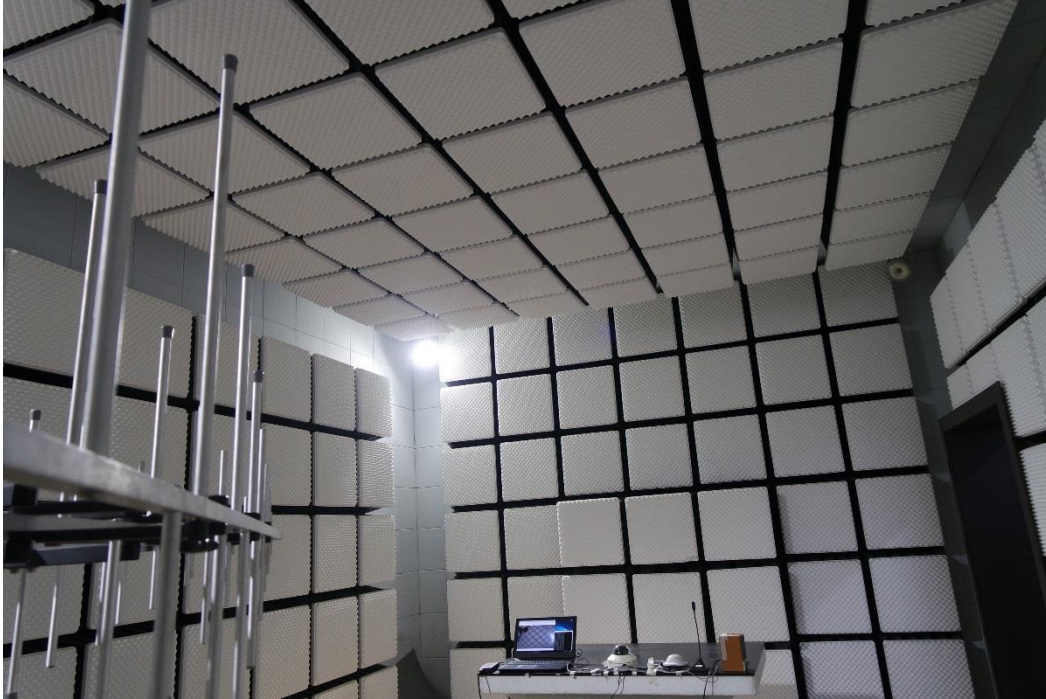

- DC 12 V Mode

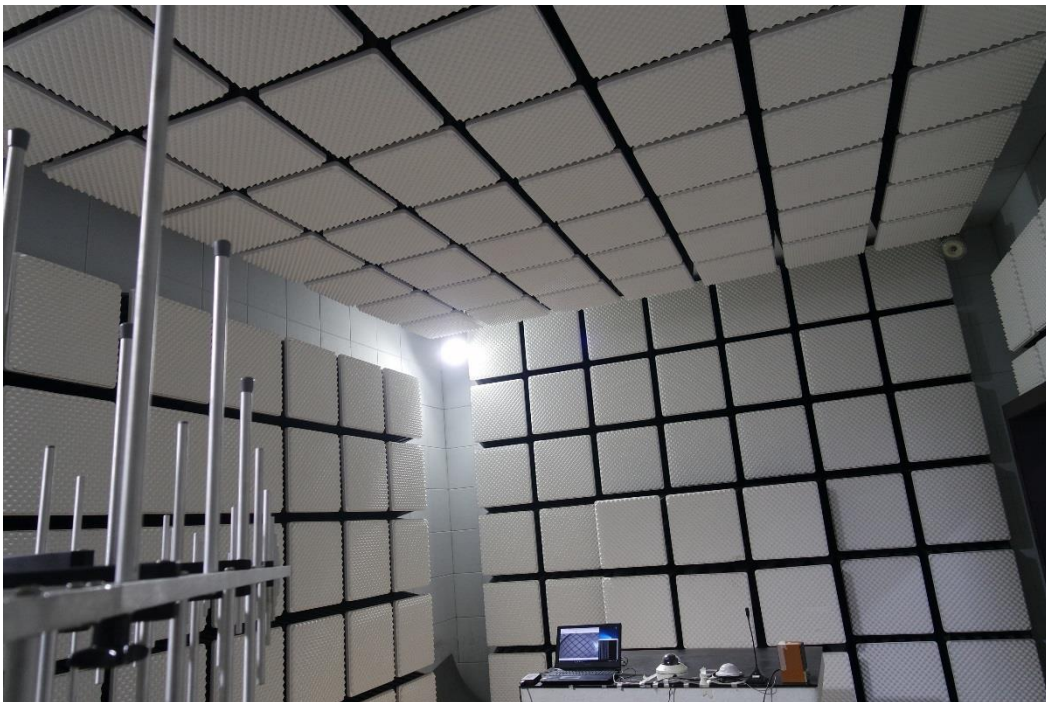


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



Electrical Fast Transients/Bursts

- AC 24 V Mode

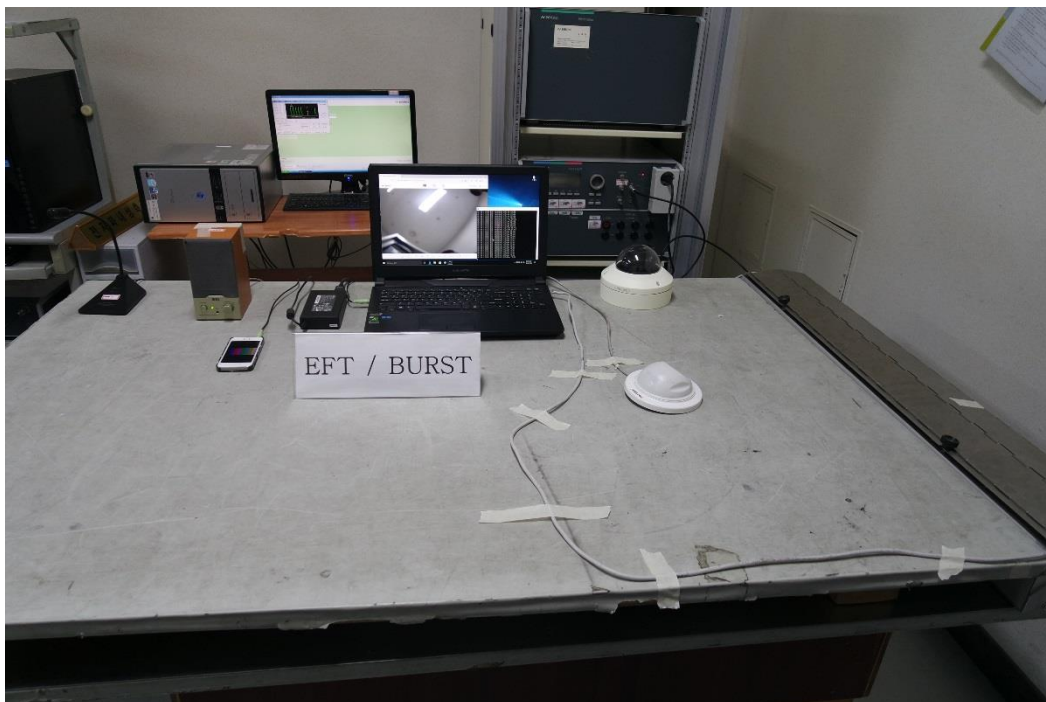

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Surge Transients

- AC 24 V Mode



- DC 12 V Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



Conducted Disturbance

- AC 24 V Mode

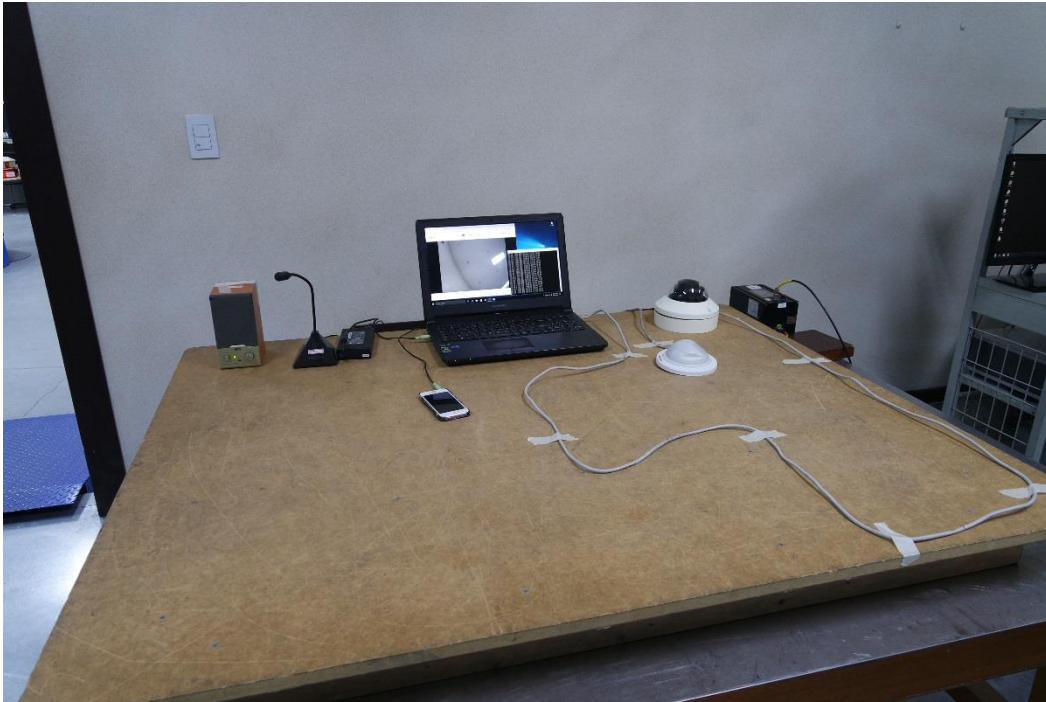

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Voltage Dips and Short Interruptions

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)

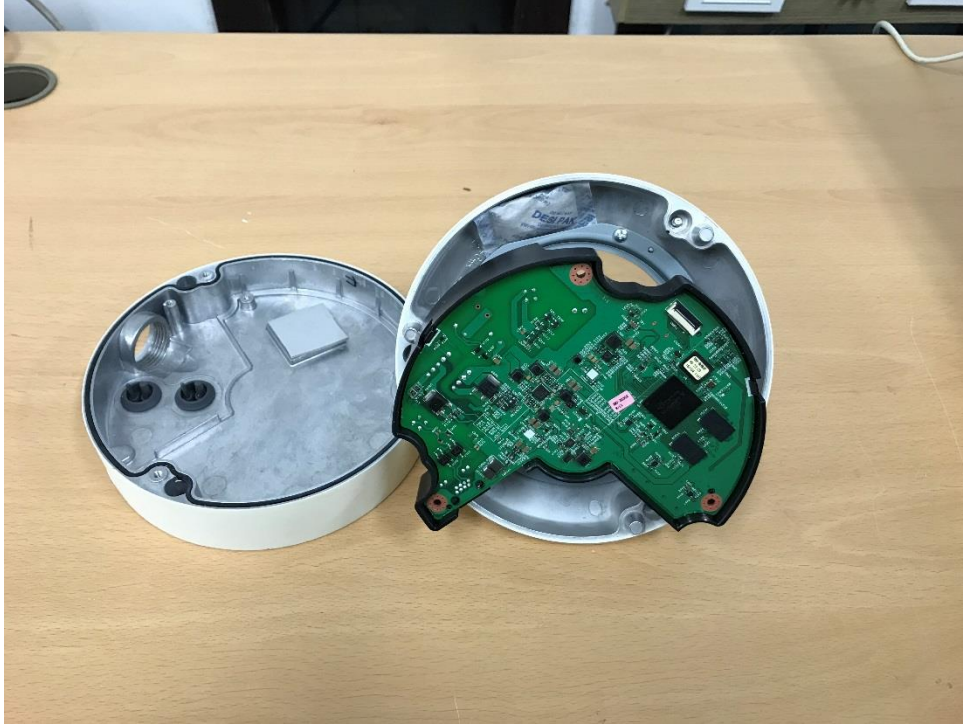


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Main Board

(Top)

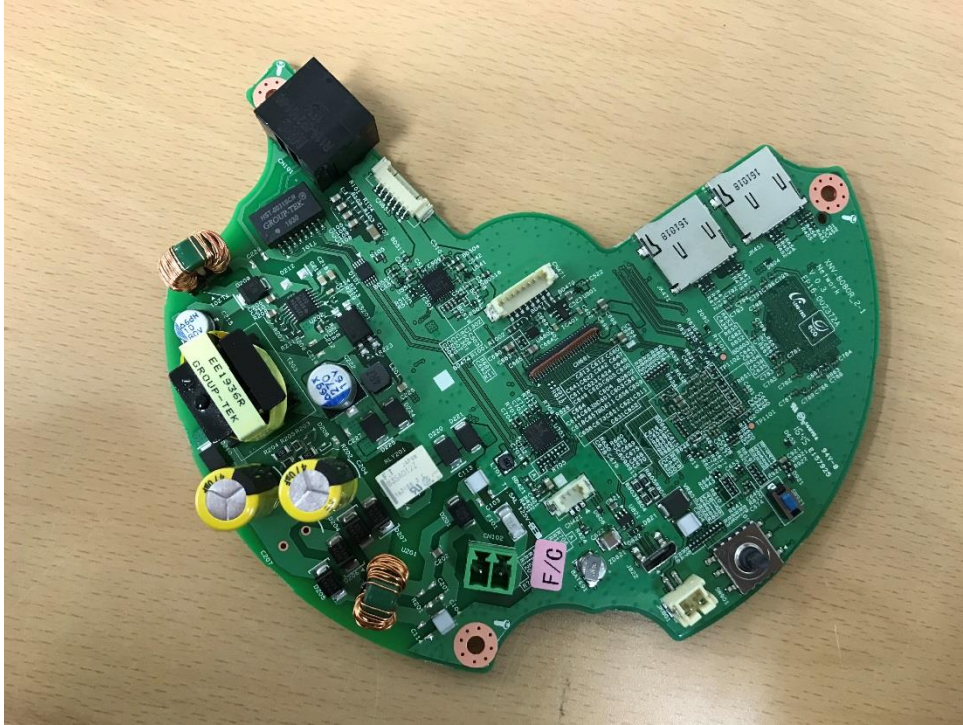


(Bottom)

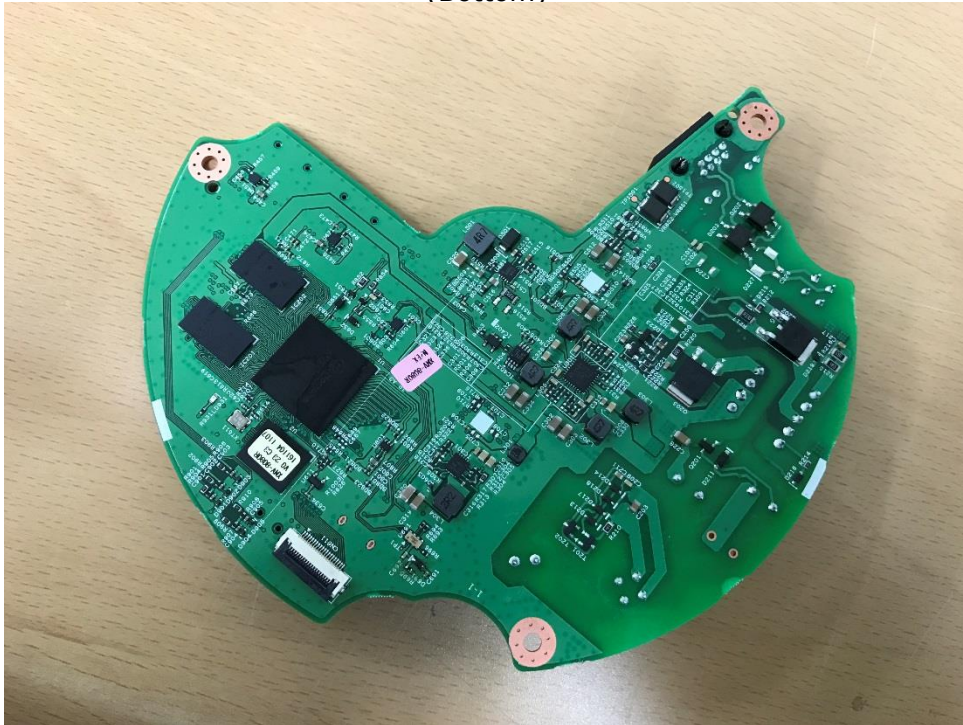

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Lens Board

(Top)

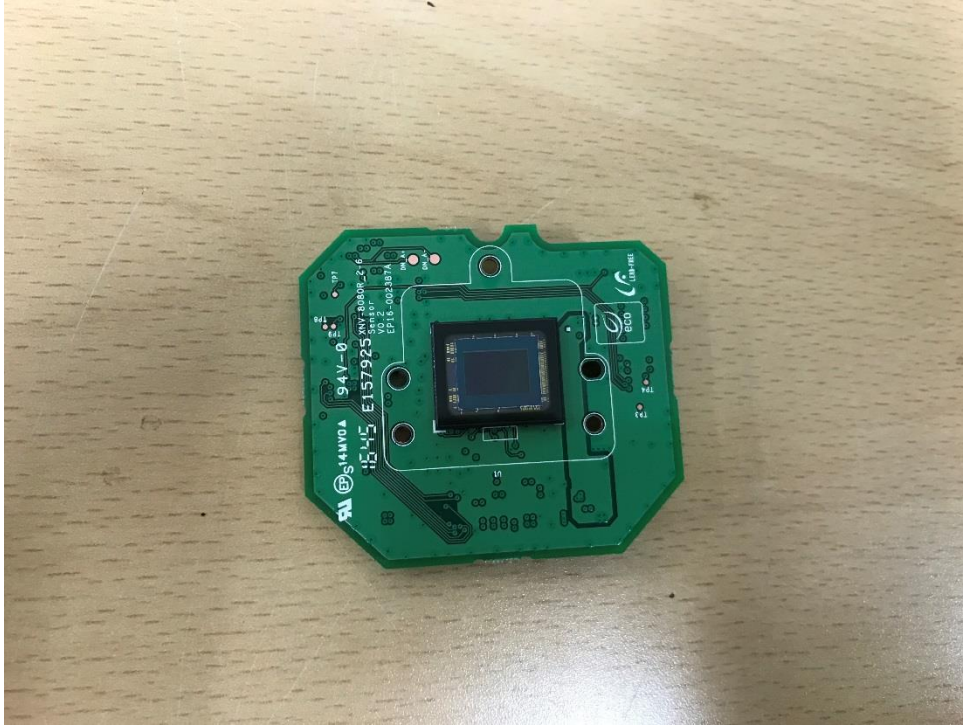

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Lens

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – LED

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label and Location



NETWORK CAMERA

Model No : XNV-8080RP

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in of China

